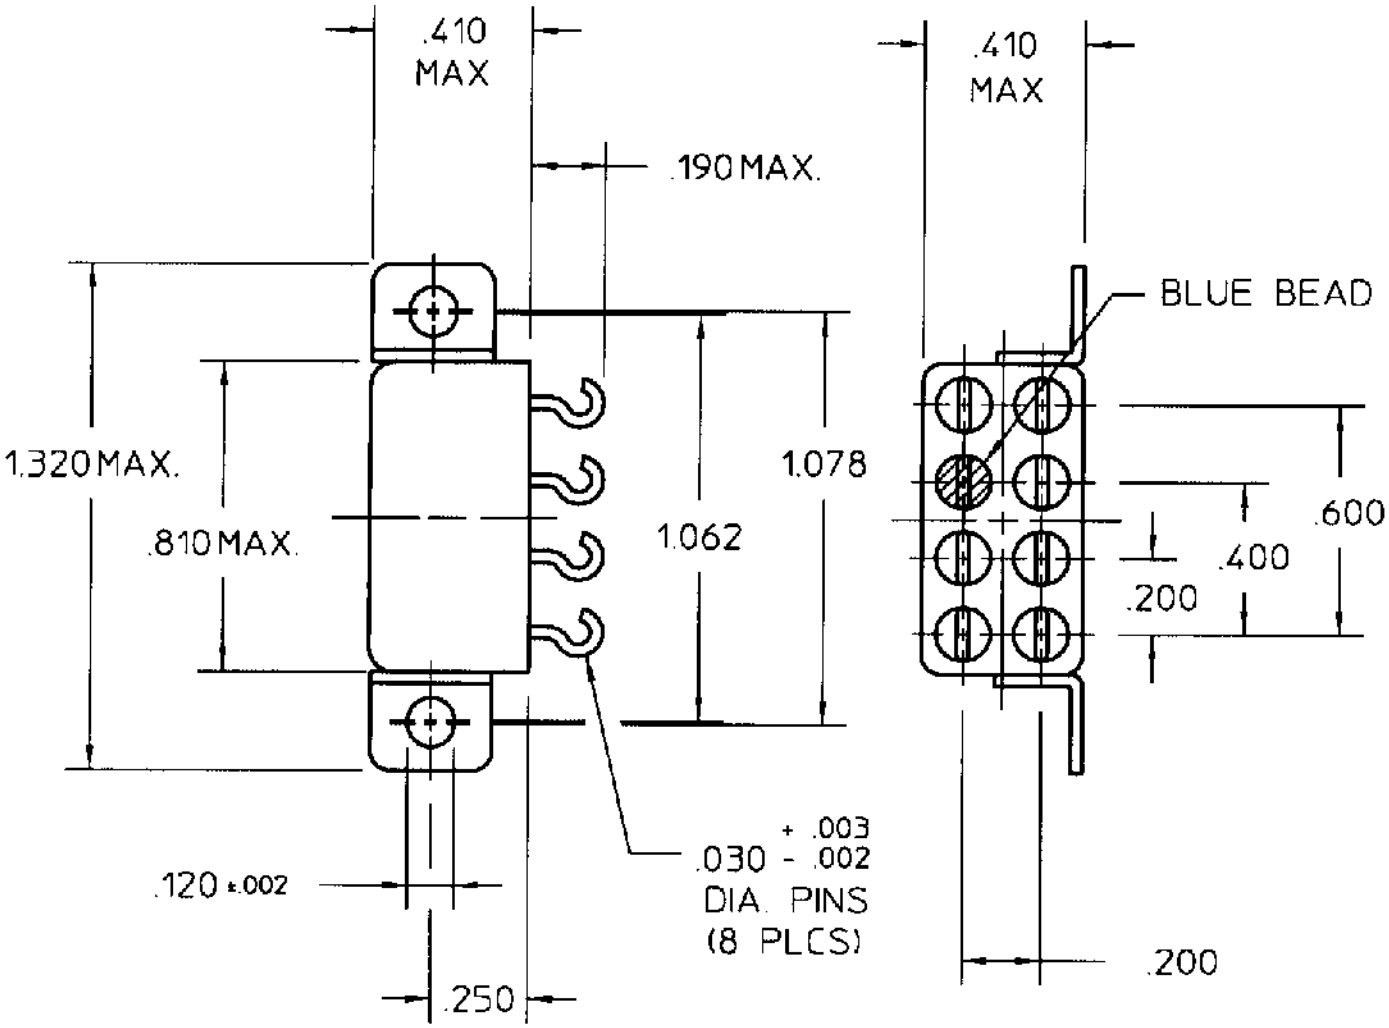


COIL: @ +25° C

RESISTANCE	40 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.5 VDC
MUST RELEASE	2.0 VDC MAX .35 VDC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX
CONTACT STABILIZATION 2 MS MAX

CUSTOMER DATA SHEET

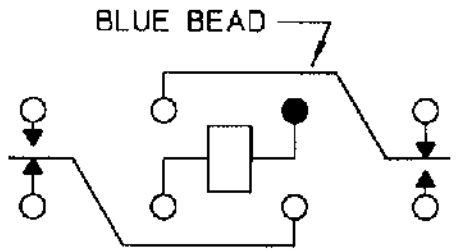

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/31/95 CK 7/31/95

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/6-121M

TYPE "HFW" RELAY

HFW1131F01M

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

TE50BR39J 141991-2 SBCHE64R7K 2834055-1 1969656-1 2377783-2 RH73H2A40MKTN 917696-1 936348-1 CPF0402B37K4E1 SMW73R0JT 1743455-2 3631B101LL CRGCQ2010J3K3 SBCHE154R7K 2-292161-3 3430B2F51RTDF MPT100C18RF 1-962915-1 175977-2 1903112-2 2310537-1 1393431-1 2005330-1 2380312-2 3-1393225-0 U5254-000005-030PA 1-794222-0 650075-000 ROX05SJ18R