



MAPX	MODIFICATION	DATE

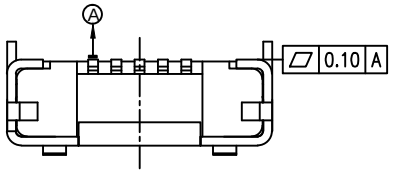






SECTION A-A'







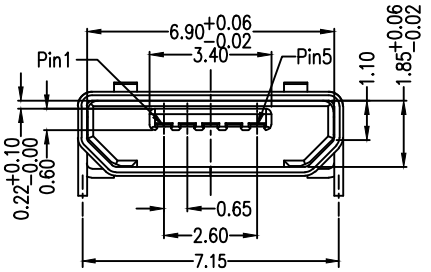

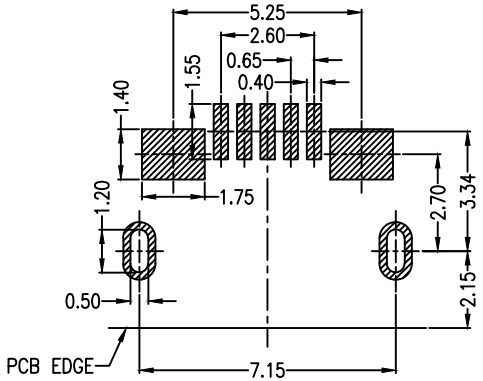

RECOMMANDED PCB LAYOUT

PCB图仅供参考

Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG		
公差一览表 TOLERANCE UNLESS OTHERMSE		
X.	±0.30	±5.°
.X	±0.25	±2.°
.XX	±0.20	±1.°
.XXX	±0.10	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	920-A62A2021S10102
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	MICRO/5P-F 两脚DIP7.2无边无柱加焊脚长端0.75SMT
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

917-P81A202ES60201 920-A64A2091S101A3 904-232A2031S10100 904-232B2032S10100
911-221A2021S10100 918-468K2029Y50000 905-761A2032S10200 908-351A1011D10100
912-312A1012D10100 918-318K2023C40005 919-162A1012D10400 906-552A1012D10200
907-111A1022D10200 920-A62A2021S10104 906-752B1114D10200 916-151A1022Y10200
920-C52A2021S10105 904-331B2032S10200 906-262A1021D10200 917-B88C201AH70201
907-312A1101Y10210 910-151A2021D10100 912-112A1011D10100 912-112A2021S10100
918-415K3028S40000 918-418K2022Y40011 920-154A2021Y10110 920-A62A2021S10108
920-C62A2021S10103 920-F52A2021S10105