



由 Autodesk 教育版产品制作

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
⚠	侧弹变更	2013.3.10

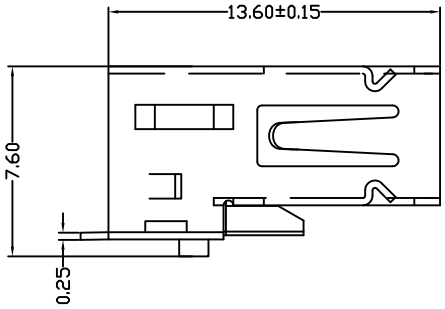

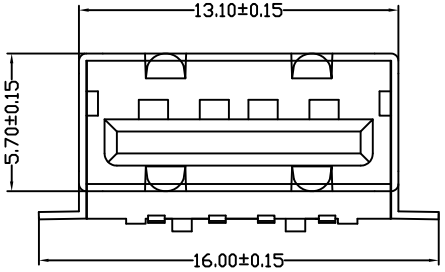

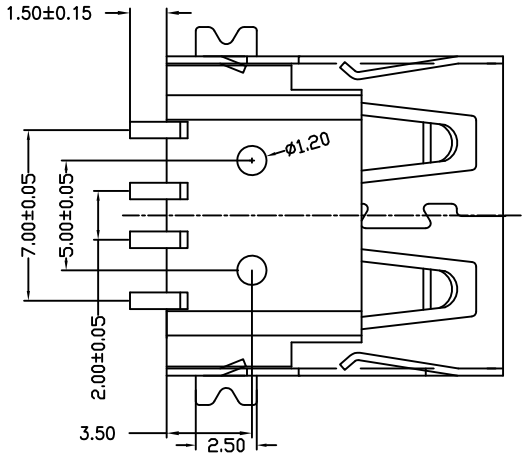

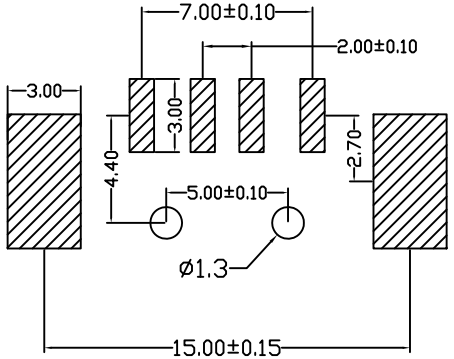

PCB:LAYOUT

NOTES:
Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35℃ to +85℃
Insulator color: Black/White
Plastic material:PBT/LCP/Others
Shell finish:Nickel plated/Tin-Lead plated
Mechanical:
Mating Force:3.5KG MAX
Unmating Force:0.7 KG MIN.
Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.10	.XXX°	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	904-241B2032S10100
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF鱼叉脚贴板无边内弹铁壳反向LCP本色1.2柱
日期 DATE	2014.10.20	核准 APPD	雷永键	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

917-B88C201AH70201 918-318K2023C40005 920-C52A2021S10105 906-752B1114D10200
918-418K2022Y40011 920-C62A2021S10103 905-761A2032S10200 907-312A1101Y10210
920-154A2021Y10110 912-112A2021S10100 920-A62A2021S10104 904-232A2031S10100
912-312A1012D10100 918-415K3028S40000 918-468K2029Y50000 920-A62A2021S10108
920-A64A2091S101A3 904-232B2032S10100 906-262A1021D10200 910-151A2021D10100
911-221A2021S10100 908-351A1011D10100 912-112A1011D10100 917-P81A202ES60201
919-162A1012D10400 920-F52A2021S10105 904-331B2032S10200 906-552A1012D10200
907-111A1022D10200 916-151A1022Y10200