
SPECIFICATIONS

RoHS Compliant

Model Number: JQD48B3E2X-E3 Rev:00

Part Number: 17001183A Jun 12, 2018

Mechanical Drawing:

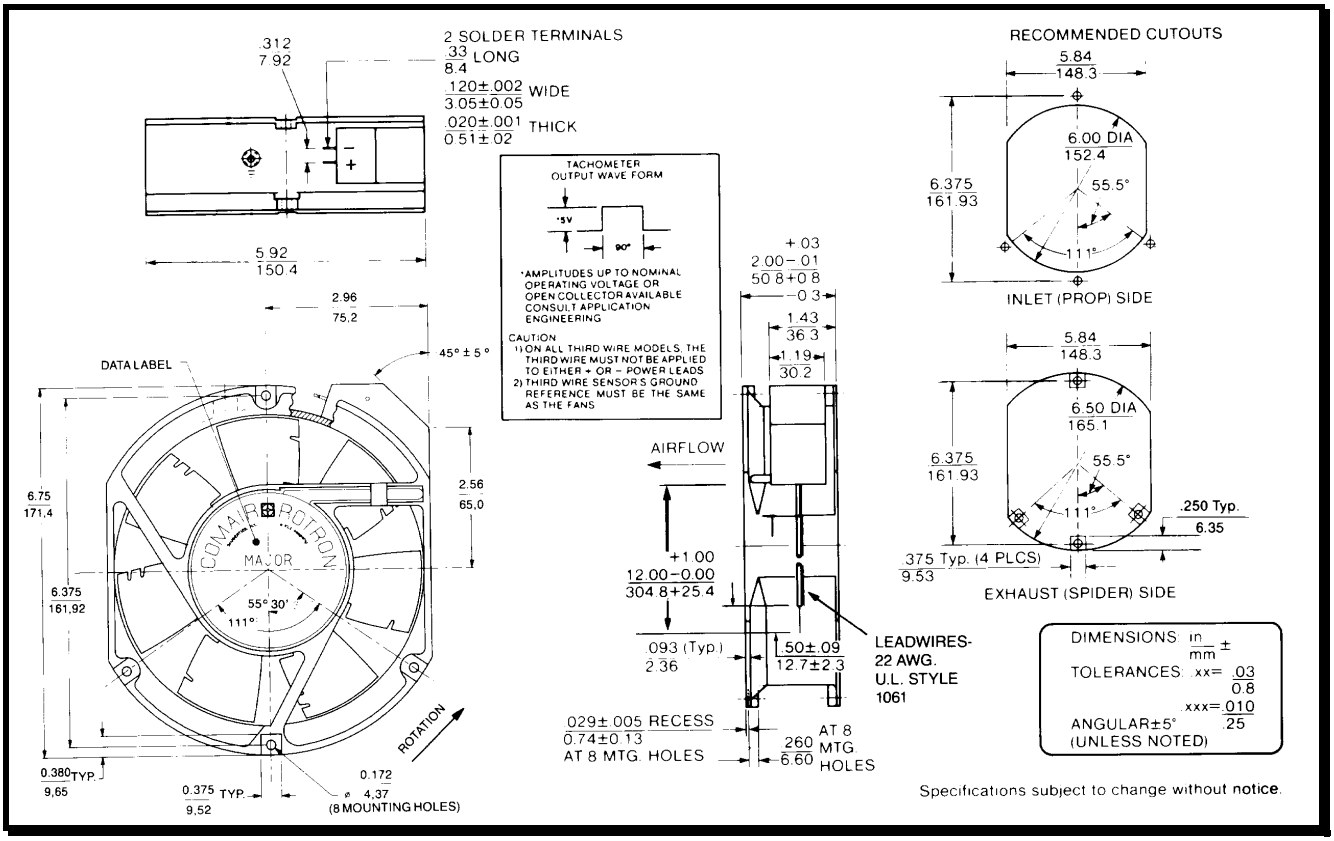

Motor:

Nominal Voltage	= 48 vdc
Operating Voltage Range	= 36 - 60 vdc
Nominal Running Current	= 0.46mps
Locked Rotor Current	= 1.0 amps
Running Power	= 22.1 watts
Average Speed	= 3400 RPM
Bearings	= Ball
Air Flow	= 235 CFM
Acoustic	= 54.3 dBA

Construction:

Venturi: Die-cast aluminum, painted black
Propeller: Plastic, painted black

Life Expectancy:

This fan is designed for continuous duty life of 58,000 hours at 70°C.

Termination:

12"±1"(304.8±25.4mm) 22AWG UL1061 Leadwires

Red	= Power(+)
Black	= Return(-)
Blue/White	= Tach output
Yellow	= PWM control

Additional Features:

Brushless DC Motor
Soft Start Inrush Current
Electronic Locked Rotor Protection
Polarity Protected
Automatic Restart Capability

Operating Temperature:	-10°C to 70°C
Storage Temperature:	-40°C to 85°C
Environmental Protection:	Type 3(IP68)

TACHOMETER:

Output:	Open Collector
Ic:	20 mA max.
Vcc:	60 Vdc max.
Pulses per Revolution:	2
Isolated:	No


Speed Control:

PWM: 200 ~ 2 KHz, Open Collector
<10% Duty: Off
10%~95% Duty: Linear Ramp
>95% Duty or Open Lead Wire: Full Speed

Agency Approvals:

UL, CUL, CE

PQ Curve:

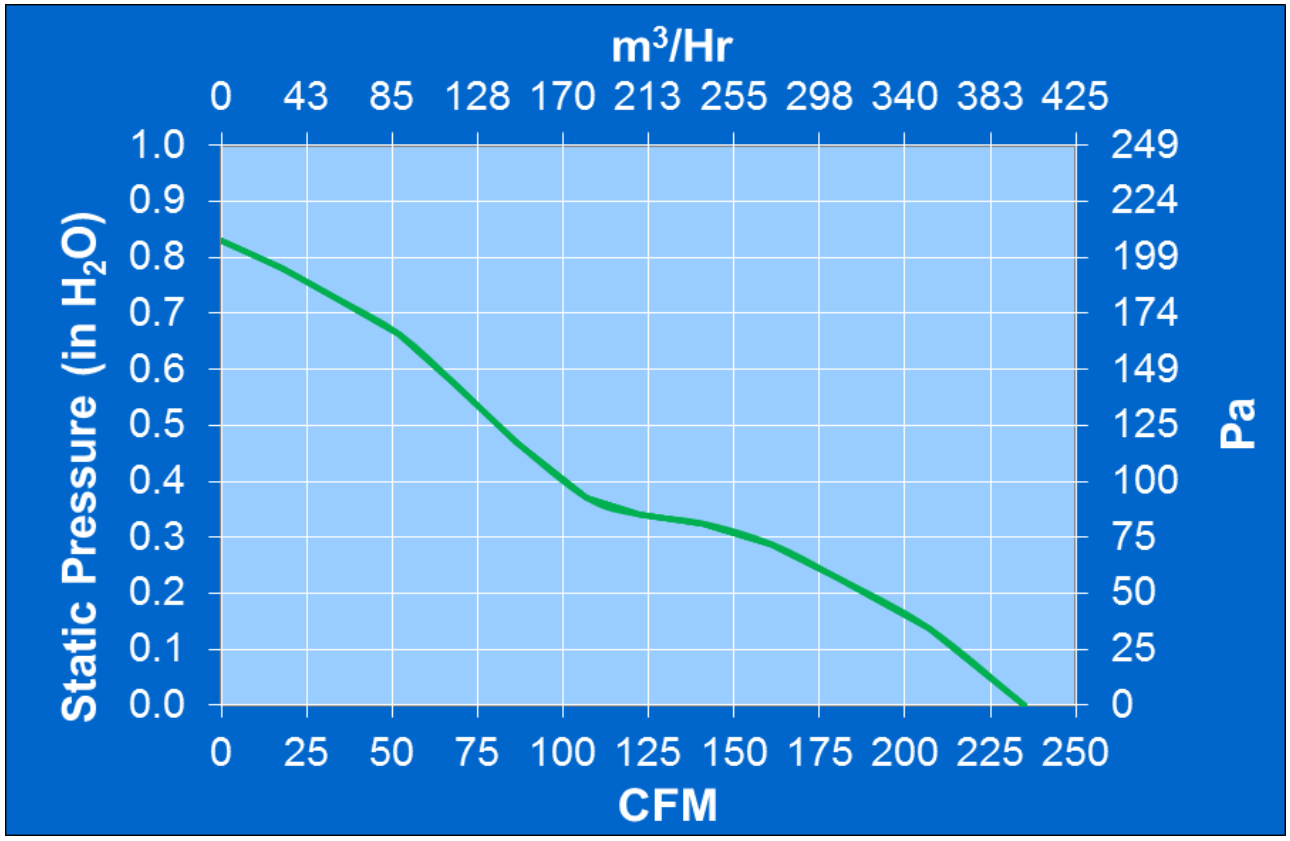
m³/Hr
0 43 85 128 170 213 255 298 340 383 425
Static Pressure (in H2O)
1.0 0.9 0.8 0.7 0.6 0.5 0.4 0.3 0.2 0.1 0.0
249 224 199 174 149 125 100 75 50 25 0
Pa
0 25 50 75 100 125 150 175 200 225 250
CFM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Comair Rotron:

039824 19028868A 19030616A 19039306A 031081 032740 GDA1238-48BB 19028885A 19028933A
031176 19030622A 19039646A 19039299A 476042 MA2B3 19031842A MD24B5-E2 19039030A 032620
032772 17001178A 17002016A 19032105A 17002001A 19030389A CLE2L2 19020188A
GL24B7-E2 19039031A 17001219A 19032183A 19039671A 17002087A 19031092A