



ROHS

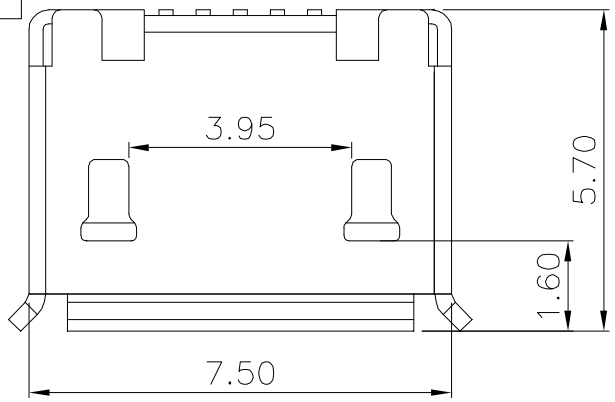

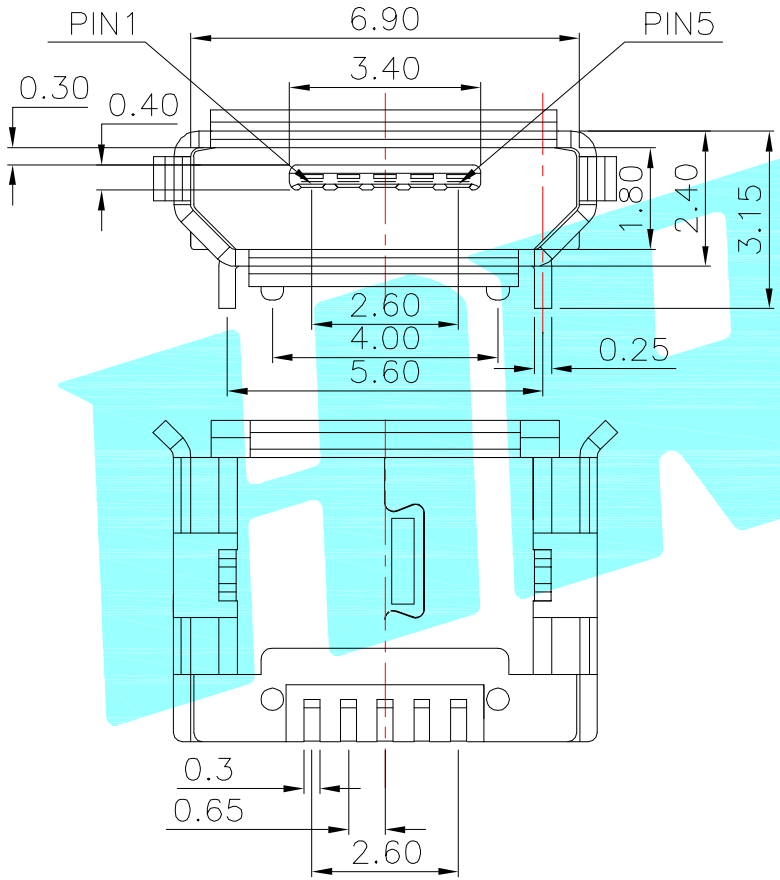

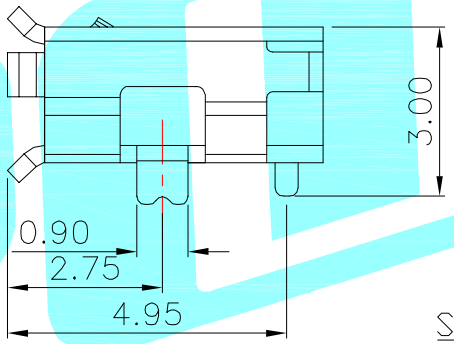

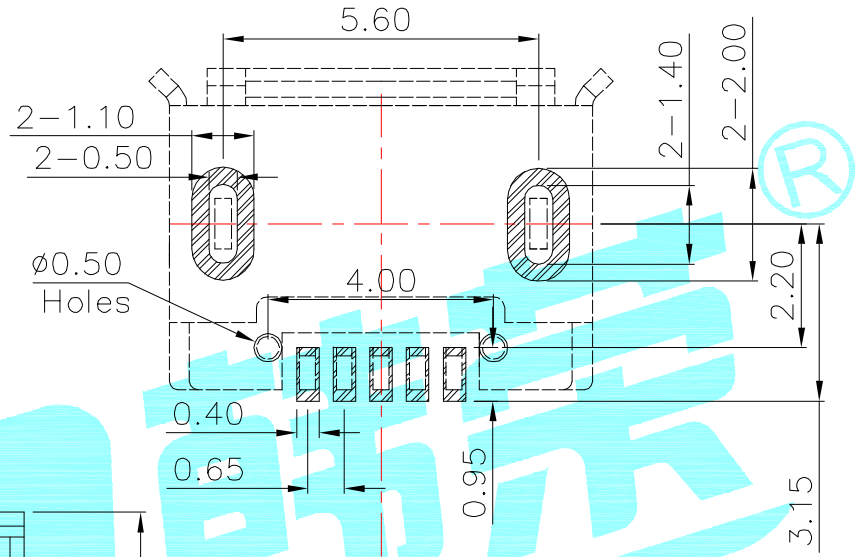

Recommended PCB Layout

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 10,000 CYCLES.
3.PACKAGING: 1000PCS/REEL

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	Phosphor Bronze	Sn Plated	——
②	Contact	——	5	Phosphor Bronze	Au Plated	——
①	Housing	——	1	LCP	Black	——

APPROVALS		DATE	
DRAWN	JKUN.LU	2014/9/29	HRO鹤荣® ELECTRONICS CO.,LTD
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO. U-F-M5DW-Y-2

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30				
	10~30	±0.25				
	5~10	±0.20	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.15				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K3-2258S-E1 K8-5851D-L1 U-F-M5DD-Y-L1 K2-1818DP-A3SW-01 DQ-03BP K2-1101DF-A4DW-01 K2-1102SP-K4SC-04 PJ-399B-6A SIM-08A K2-1102BG-I4CW-01 TYPE-C-31-M-04 U-C-M5SS-Y-1 U-F-M5DS-Y-1 U-F-M5SS-W-5 U-M-M5DD-W-2 K3-1346S-F1 DA-10RP ES-07KP U-F-M5DD-Y-L DS-01BP SS-22D03-G4 U-F-M5DD-W-L K2-1102AT-A4CW-01 K2-1102DP-G4SW-04 K5-1617SA-01 K2-1102SP-A5SC-04 PJ-3250-5A U-C-M5DW-W-1 DC-031A-10A K2-1102DP-S3SW-04