

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

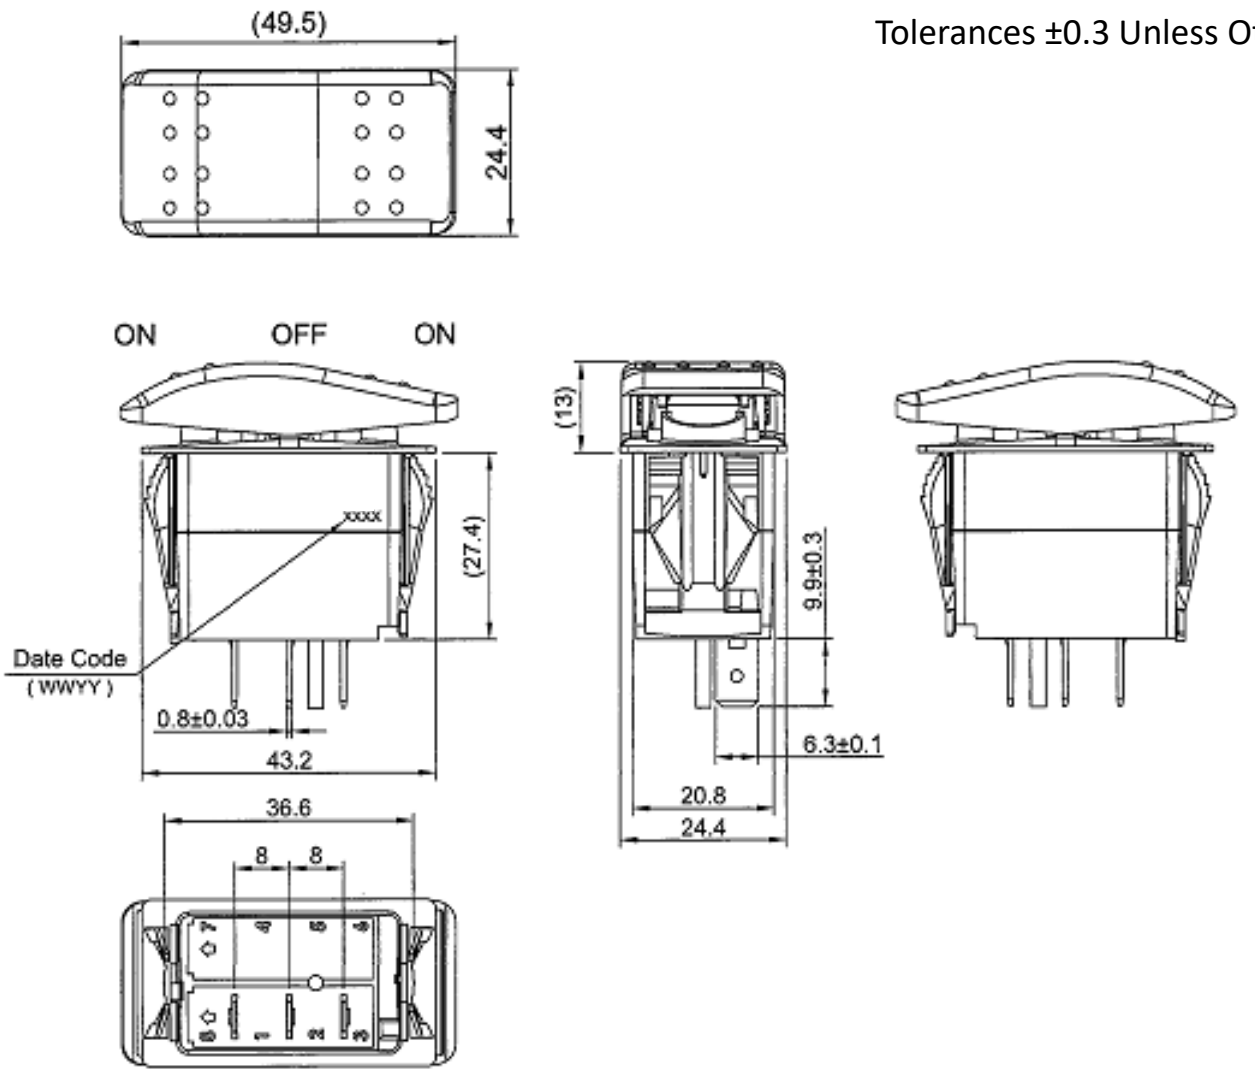


Mounting Hole

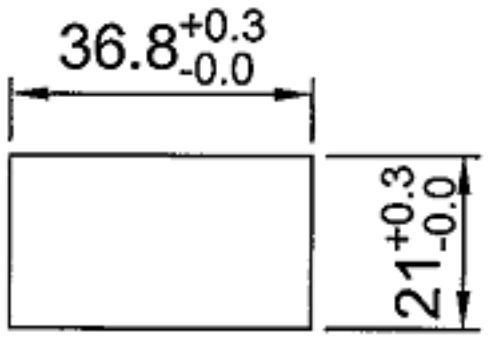

Thickness: 1.0-5.0mm

Circuit Diagram

3P SPDT ON-OFF-ON



Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94V-2)
Actuator	Black, Nylon 66 (94V-2)
Terminals	Silver plated copper
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN TA1-1A-DC-4 TA2-1G-DC-6-O PB-1A-DC-2-B RC-1A-DC-1-AL RG3-1A-DC-1-B SRD2-2F-DC-1-BNN TC6-P1-Z PB-1A-DC-2-RDL SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN TA2-1A-DC-5 WR1 RA4-2A-DC-2-AL RF3-1A-DC-2-GL SRD2-2F-DC-1-RNN TE6-1A-DC-1-UL PD-1E-DC-9-UL RD2-1A-DC-1-AL SB-1B-DC-3-B RF1-1A-DC-2-B-3 SC-B TE1-1F-DC-1-PB SB-1B-DC-3-R SRB1-1G-DC-1-NN TE3-1A-DC-1-AL PB-1B-DC-2-RIL SRD2-1G-DC-1-BNN TB1-2H-DC-6