
Specification Sheet

Part Number: 151-01496

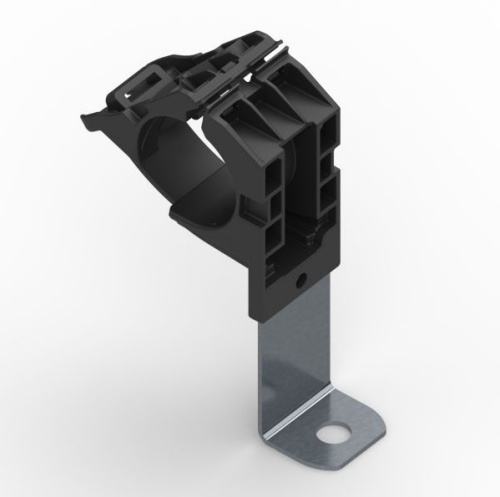

Ratchet P-Clamp, 0.76 - 1.42" Bundle Dia, 90° Long, 0.41" Hole Dia, PA66HIRHSUV/ST/ZN, Black, 140/ctn

Article Number	151-01496
Type	RCC90LM10
Color	Black (BK)
Features & Benefits	• One-piece ratchet closure allows for easy installation during pre- or final assembly. • Easy release feature simplifies quick adjustments and maintenance. • Impact modified, heat and UV stabilized PA66 provides long-term durability, indoors and out. • Zinc-plated steel mounting plate tolerates high torque and is treated to resist chemicals and salt spray. • Angled mounting plates are ideal for stacking RPCs or for avoiding obstructions or heat sources.
Quantity Per	carton

Product Description	The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The release feature provides easy and nondestructive removal of cables simply by using a flat-head screwdriver. This nondestructive release allows the clamp to be reused without removing or replacing any bolts or screws.
Short Description	Ratchet P-Clamp, 0.76 - 1.42" Bundle Dia, 90° Long, 0.41" Hole Dia, PA66HIRHSUV/ST/ZN, Black, 140/ctn
Global Part Name	RCC90LM10-PA66HIRHSUV/ST/ZN-BK

Minimum Tensile Strength (Imperial)	100.0
Minimum Tensile Strength (Metric)	445.0
Length L (Imperial)	6.69
Length L (Metric)	169.8
Fixation Method	Screw Mounting
Variant	Long
Width W (Imperial)	1.37
Width W (Metric)	34.9
Bundle Diameter Min (Imperial)	0.76
Bundle Diameter Min (Metric)	19.4

Bundle Diameter Max (Imperial)	1.42
Bundle Diameter Max (Metric)	36.0
Cable Tie Width Max (Imperial)	0.52
Cable Tie Width Max (Metric)	13.2
Mounting Hole Diameter D (Imperial)	0.405
Mounting Hole Diameter D (Metric)	10.29 mm
Mounting Hole Diameter D Max (Metric)	10.29
Stud Diameter (Metric)	M10
Mounting Hole Centers (Imperial)	1.57

Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) Steel (ST) Zinc plated (ZN)
Material Shortcut	PA66HIRHSUV ZN ST
Flammability	UL 94 HB
UV Resistant (Yes/No)	Yes
Operating Temperature (Metric)	-40°F to +221°F (-40°C to +105°C)
Reach Complaint(Article 33)	Yes

ROHS Complaint	Yes
UL Listed (US and Canada)	Yes
UL Listed (US	Yes
Package Quantity(Imperial)	140
Package Quantity (Metric)	140
Customs Number	3926909988
Content Unit(BMEcat)	pcs.

© 2020 HellermannTyton. All Rights Reserved.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HellermannTyton:

111-60119 LK2A-PA66-NA 151-00000 BMS-100-DIV-MIX 151-01944 308-30151 HIS-3-BAG-1.5/0.5-PO-X-BK
318-42400 TA42-24/6-PO-X-BK 336-00489 TFE2-10-PTFE-CL 111-05013 T50R-PA66-NA
151-21319 TY3G1-PA66-NA 308-30152 HIS-3-1.5/0.5-PO-X-RD 311-00249 TK20-2.4/1.2-PVDF-CL
556-25010 TTAGPU15X100YE-PUR-YE 712-10002 HTAPE-PROTECT180-PET-BK
162-30200 SBPPHDR20-PP-BK 561-02034 WIC2-C-PA66-YE 111-02159 T18L-PA66HS-NA
111-05406 T50L-PA66-RD 118-05900 T50LOS-PA66HS-BK 151-03864
380-03001 SHRINKIT 321 BASIC-PO-X-BK 111-03459 T30L-PA66HS-NA 336-00399 TFE2-12-PTFE-CL
IT18R0UVC2 117-05460 T50LDH-PA66W-BK 151-41219 AT2-PA66-NA 308-30614 HIS-3-BAG-6/2-PO-X-BN
450-20004 RMS 43-10-PO-X-BK AS45 308-30160 HIS-3-BAG-1.5/0.5-PO-X-RD
556-00115 TTRC+ 60MM-PET/DIV-BK 632-02280 HV2228-PVC-FR-BK