


ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

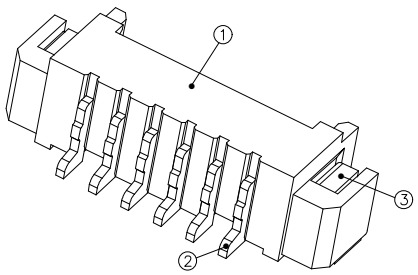

Part No	Pin	A	B	C
WAFER-MX1.25-2PWB	2	1.25	7.50	
WAFER-MX1.25-3PWB	3	2.50	8.75	
WAFER-MX1.25-4PWB	4	3.75	10.00	2.50
WAFER-MX1.25-5PWB	5	5.00	11.25	3.75
WAFER-MX1.25-6PWB	6	6.25	12.50	5.00
WAFER-MX1.25-7PWB	7	7.50	13.75	6.25
WAFER-MX1.25-8PWB	8	8.75	15.00	7.50
WAFER-MX1.25-9PWB	9	10.00	16.25	8.75
WAFER-MX1.25-10PWB	10	11.25	17.50	10.00
WAFER-MX1.25-11PWB	11	12.50	18.75	11.25
WAFER-MX1.25-12PWB	12	13.75	20.00	12.50
WAFER-MX1.25-13PWB	13	15.00	21.25	13.75
WAFER-MX1.25-14PWB	14	16.25	22.50	15.00
WAFER-MX1.25-15PWB	15	17.50	23.75	16.25
WAFER-MX1.25-16PWB	16	18.75	25.00	17.50

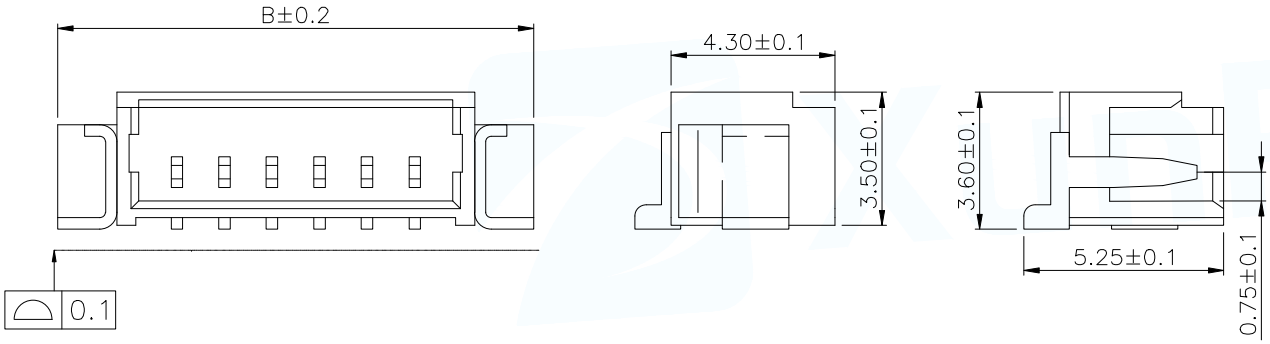

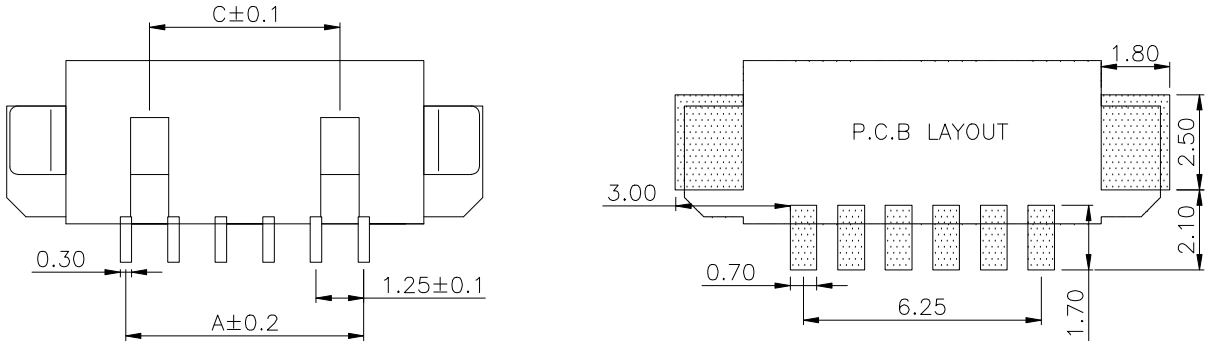

NOTES:

1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass

SPECIFICATIONS:

1.Spacing: 1.25
2.Voltage Rating: 125V AC DC
3.Current Rating: 1A AC DC
4.Insulation Resistance: 100MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 500V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: WAFER 1.25 卧贴		
			PAR	WAFER-MX1.25-NPWB	
DECIMALS:	ANGLES:		DWN		
X.:±0.2	X°.:±5°		CHKD		
.X:±0.1	X.X°:±3°		APVD		
.XX:±0.05	X.XX°:±1°	CUSTOMER COPY	SCALE1:1	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5FX-16PWCR-H20 FPC-0.5FX-4PWBH15 MU-103-ARW64 WAFER-PH2.0-2PJK
WAFER-VH3.96-4PLB WAFER-WBM4.2-16PJK-GB DC-031A-A100 FPC-0.5AX-30PWCR-H20
FPC-0.5HF-10PWBR-H20 SMA-KWE-323C-H13X23-LW WAFER-MX1.25B-8PWB FPC-0.5AX-24PWCR-H20
FPC-0.5FX-14PWCR-H20 FPC-0.5FX-4PWCR-H20 FPC-1.0HF-4PWAR-H20 TYPEC-304YDSW-ACP16
WAFER-PH2.0-3PWB FPC-0.5FX-20PWBH15 WAFER-PH2.0-11PZZ RJ45-005-014-11
WAFER-PH2.0-8PLB FPC-0.5AL-6PB FPC-1.0AX-14PWCR-H25 FPC-1.0AX-4PWCR-H25 HDMI-212L
PHB2.0-02-20PZZ WAFER-GH1.25-6PLB WAFER-PH2.0-6PWB WAFER-XH2.54-4PWZ-H62
FPC-0.5AS-5PWCR-H20