
Amphenol®

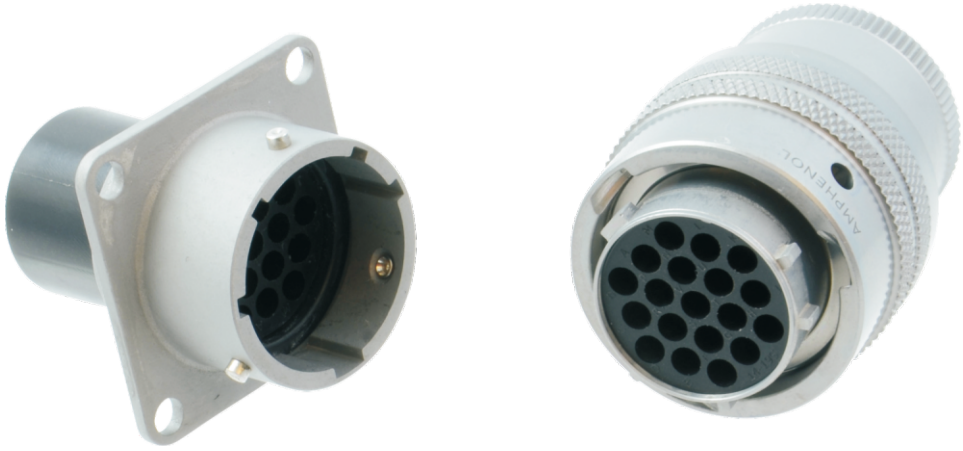

LPT Series Connectors

Amphennol

Table of Contents

- Company introduction ---- 01
- Product introduction ---- 02
- Market Applications ---- 03
- Technical data ---- 04
- How to order/Shell Type ---- 05
- Crimp contact ordering info ---- 06
- Machined contact ordering info ---- 07
- Service class ---- 08
- Alternate positioning ---- 09
- Insert arrangements ---- 10
- Product dimensions ---- 12
- Assembly instructions ---- 17





Amphenol Industrial Products Group

The Amphenol Industrial Products Group (AIPG), a group of the Amphenol Corporation, is a prominent manufacturer of cylindrical connectors known around the world. Amphenol Industrial's product lines consist of rectangular, standard miniature, fiber optic, EMI/EMP filter, and a variety of special application connectors.

Manufacturing connectors since 1932, we take pride that the Amphenol Industrial Products Group is the undisputed leader in interconnect systems for harsh environment applications. Innovations like our RADSOK® contact technology can provide roughly 50% more current through the same size pin. Connectors utilizing this RADSOK® technology will outperform similar products in the market hands down.

The Sidney, NY facility, nestled at the foothills of the Catskill Mountains, is over 307,000 square feet. This complex houses over 1,000+ employees incorporating state-of-the-art manufacturing technologies. The facility is both ISO9001 certified and qualified to MIL-STD-790 requirements.

Amphenol Technology (Zhuhai) Co., Ltd.

Established in 2007, Amphenol Technology (Zhuhai) Co., Ltd. is a manufacturing facility for the Amphenol Industrial Products Group, which serves a number of industrial markets, included but not limited to Factory Automation, Transportation, Heavy Equipment, Alternative Energy, Oil & Gas, Server/Data Comm and Power Distribution.

Amphenol Technology (Zhuhai) Co., Ltd. covers an area of 28,470m² and is equipped with CNCs, plating, injection molding and assembly workshops. This plant specializes in the design and manufacturing of industrial connectors featuring high power, high density inserts, medium to high voltage electrical properties, and harsh environment applications.

With industry leading engineering, design and manufacturing expertise, Amphenol Technology (Zhuhai) Co., Ltd. has earned more than 30 utility patents on its innovative interconnects. Many of the products produced have been certified by independent standards including UL, IEC/TUV, ATEX, IECEx and MA. The facility is also certified to ISO 9001, ISO 14001 and TS16949.

LPT Series Product Introduction





What are LPT Series Connectors?

The LPT Series is based on the MIL-C-26482 Series I and Amphenol's original PT Series. Cost effective without sacrificing quality. This series is a cylindrical bayonet connector constructed with an aluminum shell and features stamped and formed crimped contacts.

Features and Benefits

- Aluminum shell construction provides high strength while being light in weight
- Multiple shell plating options (up to 500H salt spray protection)
- Stamped and formed crimp contacts with a 3 tine retention system
- Machined contacts available
- Off the shelf availability
- Quick positive bayonet coupling
- 5 key/keyway mating
- Ingress protection up to IP67 and IP69K when in the mated condition
- High shock and high vibration resistance
- Operating temperature range: -40°C to 125°C
- Intermateable with Amphenol's PT series
- PT standard shells have years of proven performance in the field
- UL/TUV certifications in process

Structure Features

5 Shell Styles：

① Box mounting receptacle
② Jam nut receptacle
③ Straight plug
④ Wall mounting receptacle
⑤ Cable connecting receptacle

3 Connector Finishes Available:

① Black zinc (RoHS)
② Nickel (RoHS)
③ Gray zinc nickel(RoHS)

4 Alternate Positioning :
Insert rotation W,X,Y,Z

Crimp Contact Size：

① #12: 14-12 (2.00-4.00mm²)

② #16: 18-16 (0.75-1.50mm²)

③ #20: 24-20 (0.25-0.50mm²)

④ Contact our sales team if you need RADSOK® or alternate size contact options

Market Applications

Widely used in general and harsh environments, the LPT Series is suitable for markets including but not limited to the following:

- Industrial Instrumentation
- Security
- Telecommunications
- Robotics/Factory Automation
- Process Control
- Energy Storage
- Hybrid/Electric Vehicle
- Heavy Equipment
- Rail Mass Transit



Technical Data

Shell Material	Aluminum	
Insert Material	Plastic	
Contact	Material	Copper alloy
	Plating	Tin/Nickel/Gold plated
	Termination	Crimp
Temperature Range	-40°C to +125°C	
Ingress Protection	IP67&IP69K in the mated condition A basic dust cover or an IP67 compliant cap are available for protection in the unmated condition	
Test Current	20# contact 7.5A	
	16# contact 13A	
	12# contact 23A/35A with RADSOK®	
Recommended Operating Voltage	Ⅰ# 250V	
	Ⅱ# 500V	
Test Voltage AC	Ⅰ# 1500V	
	Ⅱ# 2300V	
Mating Cycles	500 Cycles	
Salt Spray Test	1. Black Zinc (non-conductive): 48H 2. Nickel (conductive): 48H 3. Gray Zinc Nickel (conductive): 500H	
Vibration	In accordance with test procedure EIA-364-28	
Thermal Shock	In accordance with test procedure EIA-364-32	
RoHS	Compliant	

How to Order

LPT 06 SE 20–41 S W (023)

Series Name

Shell Style
- "00"- Wall Mounting Receptacle
- "01"- Cable Connecting Receptacle
- "02"- Box Mounting Receptacle
- "06"- Straight Plug
- "07"- Jam Nut Receptacle

Service Class
- "A"- General Duty
- "SE(SR)"- Strain Relief Clamp
- "SE"- Open Wire Sealing
- "G"- Heat Shrink Boot Adaptor
- "PG"- Compressing Cable Gland

Shell Size
- "20"- Shell Size #8~#24

Options
1. Plating
   - "027"- Black Zinc
   - "023"- Nickel
   - "072"- Gray Zinc Nickel
2. "LC"- Less Contacts
3. "EMI"
4. "SR"- Strain Relief

Insert Rotation
- W - W key
- X - X key
- Y - Y key
- Z - Z key

Refer to "Alternate Positioning" Page

Contact Configuration
- "P" - Pin Contact
- "S" - Socket Contact

Insert Arrangement

Refer to "Insert Arrangement" Page

Shell Type

Wall Mounting Receptacle LPT00



Cable Connecting Receptacle LPT01



Box Mounting Receptacle LPT02



Straight Plug LPT06



Jam Nut Receptacle LPT07



Crimp Contact Ordering Information






Size	Current (A)	PIN/SOCKET	Wire AWG	Wire mm^2	Plating	Part No	Pcs/ Reel
#20	7.5	PIN	22-20	0.34-0.50	Tin plating	LPTC-SF-20P-20-1	3000
					Ni plating	LPTC-SF-20P-20-2	
					Gold flash	LPTC-SF-20P-20-3	
					10u"gold plating	LPTC-SF-20P-20-4	
					30u"gold plating	LPTC-SF-20P-20-5	
		SOCKET	22-20	0.34-0.50	Tin plating	LPTC-SF-20S-20-1	
					Ni plating	LPTC-SF-20S-20-2	
					Gold flash	LPTC-SF-20S-20-3	
					10 u"gold plating	LPTC-SF-20S-20-4	
					30 u"gold plating	LPTC-SF-20S-20-5	
#16	13	PIN	16-18	0.75-1.50	Tin plating	UPTC-SF-16P-16-1	
					Ni plating	UPTC-SF-16P-16-2	
					Gold flash	UPTC-SF-16P-16-3	
					10u"gold plating	UPTC-SF-16P-16-4	
					30u"gold plating	UPTC-SF-16P-16-5	
			20-22	0.34-0.50	Tin plating	UPTC-SF-16P-20-1	
					Ni plating	UPTC-SF-16P-20-2	
					Gold flash	UPTC-SF-16P-20-3	
					10u"gold plating	UPTC-SF-16P-20-4	
					30u"gold plating	UPTC-SF-16P-20-5	
		SOCKET	16-18	0.75-1.50	Tin plating	UPTC-SF-16S-16-1	
					Ni plating	UPTC-SF-16S-16-2	
					Gold flash	UPTC-SF-16S-16-3	
					10u"gold plating	UPTC-SF-16S-16-4	
					30u"gold plating	UPTC-SF-16S-16-5	
			20-22	0.34-0.50	Tin plating	UPTC-SF-16S-20-1	
					Ni plating	UPTC-SF-16S-20-2	
					Gold flash	UPTC-SF-16S-20-3	
					10u"gold plating	UPTC-SF-16S-20-4	
					30u"gold plating	UPTC-SF-16S-20-5	
#12	23	PIN	12~14	2.00-3.50	Tin plating	LPTC-SF-12P-12-1	
					Ni plating	LPTC-SF-12P-12-2	
					Gold flash	LPTC-SF-12P-12-3	
					10u"gold plating	LPTC-SF-12P-12-4	
					30u"gold plating	LPTC-SF-12P-12-5	
		SOCKET	12~14	2.00-3.50	Tin plating	LPTC-SF-12S-12-1	
					Ni plating	LPTC-SF-12S-12-2	
					Gold flash	LPTC-SF-12S-12-3	
					10u"gold plating	LPTC-SF-12S-12-4	
					30u"gold plating	LPTC-SF-12S-12-5	

Machined Contact Ordering Information



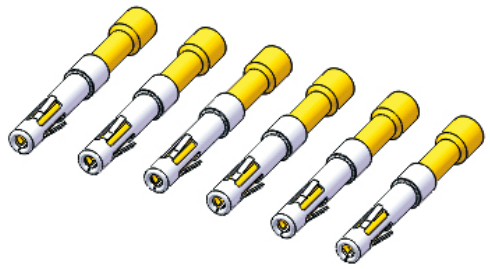

Size	Current (A)	PIN/SOCKET	Wire AWG	Wire mm^2	Plating	Part No
#20	7.5	PIN	22-20	0.34-0.50	Tin plating	LPTC-MA-20P-20-1
					Ni plating	LPTC-MA-20P-20-2
					Gold flash	LPTC-MA-20P-20-3
					10u"gold plating	LPTC-MA-20P-20-4
					30u"gold plating	LPTC-MA-20P-20-5
		SOCKET	22-20	0.34-0.50	Tin plating	LPTC-MA-20S-20-1
					Ni plating	LPTC-MA-20S-20-2
					Gold flash	LPTC-MA-20S-20-3
					10 u"gold plating	LPTC-MA-20S-20-4
					30 u"gold plating	LPTC-MA-20S-20-5
#16	13	PIN	16-18	0.75-1.50	Tin plating	UPTC-MA-16P-16-1
					Ni plating	UPTC-MA-16P-16-2
					Gold flash	UPTC-MA-16P-16-3
					10u"gold plating	UPTC-MA-16P-16-4
					30u"gold plating	UPTC-MA-16P-16-5
			20-22	0.34-0.50	Tin plating	UPTC-MA-16P-20-1
					Ni plating	UPTC-MA-16P-20-2
					Gold flash	UPTC-MA-16P-20-3
					10u"gold plating	UPTC-MA-16P-20-4
					30u"gold plating	UPTC-MA-16P-20-5
		SOCKET	16-18	0.75-1.50	Tin plating	UPTC-MA-16S-16-1
					Ni plating	UPTC-MA-16S-16-2
					Gold flash	UPTC-MA-16S-16-3
					10u"gold plating	UPTC-MA-16S-16-4
					30u"gold plating	UPTC-MA-16S-16-5
			20-22	0.34-0.50	Tin plating	UPTC-MA-16S-20-1
					Ni plating	UPTC-MA-16S-20-2
					Gold flash	UPTC-MA-16S-20-3
					10u"gold plating	UPTC-MA-16S-20-4
					30u"gold plating	UPTC-MA-16S-20-5
#12	23	PIN	12~14	2.00-3.50	Tin plating	LPTC-MA-12P-12-1
					Ni plating	LPTC-MA-12P-12-2
					Gold flash	LPTC-MA-12P-12-3
					10u"gold plating	LPTC-MA-12P-12-4
					30u"gold plating	LPTC-MA-12P-12-5
		SOCKET	12~14	2.00-3.50	Tin plating	LPTC-MA-12S-12-1
					Ni plating	LPTC-MA-12S-12-2
					Gold flash	LPTC-MA-12S-12-3
					10u"gold plating	LPTC-MA-12S-12-4
					30u"gold plating	LPTC-MA-12S-12-5

Service Classes

The LPT connector is available in the following certified service classes:


"A"



"SE"



"PG"



"SE(SR)"



"G"




"A"	General duty: back shell is threaded for conduit attachment of MS3057 cable clamp.
"SE(SR)"	Strain relief clamp - environmental resistant strain relief clamp and grommet for moisture proofing individual wires; provides added wire bundle support.
"SE"	Open wire sealing environmental resistant, with a nut and grommet for moisture proofing individual wires.
"G"	Heat shrink boot adaptor- back shell for heat shrink boot, with optional grommet for moisture proofing individual wires.
"PG"	Compressing cable gland for moisture proofing jacketed cables with option of EMI shielding function.

Alternate Positioning


Alternate Positioning

To avoid cross-plugging problems in applications requiring the use of more than one miniature cylindrical connector of the same size and arrangement, alternate insert rotations are available as indicated in the accompanying chart.


As shown in the diagram at right, the front face of the pin insert is rotated within the shell in a clockwise direction from the normal shell key. The socket insert would be rotated counterclockwise the same number of degrees in respect to the normal shell key.




Position W



Position X



Position Y








Position Z





Insert Rotation					
Shell Size	Insert Arrangement	Degrees			
		W	X	Y	Z
8	8-4	45	97	184	-
10	10-2	45	90	315	
10	10-6	90	-	-	-
12	12-4	38	-	-	-
12	12-8	90	112	203	292
12	12-10	60	155	270	295
14	14-5	40	92	184	273
14	14-8	48	162	189	312
14	14-19	30	165	315	
14	14-AA	45	-	-	-

Insert Rotation					
Shell Size	Insert Arrangement	Degrees			
		W	X	Y	Z
16	16-8	54	152	180	331
16	16-26	60	-	275	338
18	18-5	55	97	263	315
18	18-8	180	-	-	-
18	18-11	62	119	241	340
18	18-32	85	138	222	265
20	20-16	238	318	333	347
20	20-41	45	126	225	-
22	22-55	30	142	226	314
24	24-31	90	225	255	-





Insert Arrangements





Pole	4	2	6	4
Insert Arrangement				
	8-4	10-2	10-6	12-4
Service Rating	I	I	I	I
Total Contacts	4	2	6	4
Contact No.	20	16	20	16

Pole	8	10	5	8
Insert Arrangement				
	12-8	12-10	14-5	14-8
Service Rating	I	I	II	I
Total Contacts	8	10	5	6 2
Contact No.	20	20	16	20 12

Pole	19	4	8	26
Insert Arrangement				
	14-19	14-AA	16-8	16-26
Service Rating	I	I	II	I
Total Contacts	19	4	8	26
Contact No.	20	12	16	20


Insert Arrangements


Pole	5	8	11	32
Insert Arrangement				
	18-5	18-8	18-11	18-32
Service Rating	II	I	II	I
Total Contacts	5	8	11	32
Contact No.	12	12	16	20


Pole	16	41	55	31
Insert Arrangement				
	20-16	20-41	22-55	24-31
Service Rating	II	I	I	I
Total Contacts	16	41	55	31
Contact No.	16	20	20	16

Product Dimensions


LPT00 (Wall Mounting Receptacle & Back Shells)

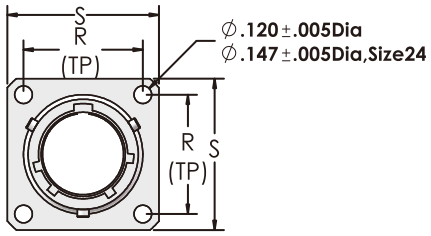







Class "A"




Class"SE(SR)"



Class"SE"



Class"G"




Class"PG"


	Receptacle Front View		Receptacle side view						CLASS "A"				CLASS "SE(SR)"	
Shell size	R	S	A	M	K	L		Q	D	L	N	V	D	G
			+. 001 -. 005	+. 010 -. 000	+. 020 -. 010	Max. PIN	Max. SOCKET	Thread Class 2A	Min.	Max.	Max.	Thread Class A	Min.	Max.
8	.594	.812	.473	.431	.493	1.27	1.056	.4375-28UNEF	.297	1.633	.590	.5000-28UNEF	.240	.125
10	.719	.938	.590	.431	.493	1.27	1.056	.5625-24NEF	.421	1.633	.717	.6250-24NEF	.302	.188
12	.812	1.031	.750	.431	.493	.127	1.056	.6875-24NEF	.546	1.633	.834	.7500-20UNEF	.428	.312
14	.906	1.125	.875	.431	.493	.127	1.056	.8125-20UNEF	.663	1.633	.970	.8750-20UNEF	.552	.375
16	.969	1.219	1.000	.431	.493	1.27	1.056	.9375-20UNEF	.787	1.633	1.088	1.0000-20UNEF	.615	.500
18	1.062	1.312	1.125	.431	.493	1.27	1.056	1.0625-18NEF	.879	1.633	1.216	1.1875-18NEF	.740	.625
20	1.156	1.438	1.250	.556	.650	1.332	1.164	1.1875-18NEF	1.014	1.674	1.332	1.1875-18NEF	.740	.625
22	1.250	1.562	1.375	.556	.650	1.332	1.164	1.3125-18NEF	1.134	1.674	1.460	1.4375-18NEF	.928	.750
24	1.375	1.688	1.500	.589	.683	1.332	1.164	1.4375-18NEF	1.259	1.674	1.585	1.4375-18NEF	.990	.800


	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
Shell size	H	L		N	L		N	L	N	N	D	L
	Max.	Max. PIN	Max. SOCKET	Max.	Max. PIN	Max. SOCKET	Max.	Max.	Max.	REF	Cable range (mm)	REF
8	.812	2.354	2.202	.550	1.746	1.538	.560	1.768	.620	.571	3-6.5	2.309
10	.875	2.354	2.202	.675	1.746	1.538	0.685	1.768	.730	.814	4-8	2.309
12	1.000	2.354	2.202	0.803	1.746	1.538	0.813	1.768	.939	.814	4-8	2.309
14	1.125	2.354	2.202	0.920	1.746	1.538	0.930	1.768	.971	.930	5-10	2.309
16	1.188	2.486	2.272	1.047	1.746	1.538	1.057	1.768	1.179	1.120	10-14	2.309
18	1.438	2.486	2.272	1.165	1.746	1.750	1.175	1.768	1.266	1.180	13-18	2.309
20	1.438	2.684	2.470	1.290	1.918	1.750	1.301	1.980	1.427	1.296	13-18	2.385
22	1.625	2.684	2.470	1.418	1.918	1.750	1.430	1.980	1.522	1.496	18-25	2.385
24	1.719	2.684	2.470	.1.543	1.918	1.750	1.555	1.980	1.644	1.562	18-25	2.385

Product Dimensions


LPT01 (Cable Connecting Receptacle & Back Shells)









Class "A"




Class"SE(SR)"



Class"SE"



Class"G"




Class"PG"

Shell size	Receptacle Front View		Receptacle side view						CLASS "A"				CLASS "SE(SR)"	
	S ±.020	Y ±.020	A	M	K	L		Q	D	L	N	V	D	G
			+. 001 -. 005	+. 010 -. 000	+. 020 -. 010	Max. PIN	Max. SOCKET	Thread Class 2A	Min.	Max.	Max.	Thread Class A	Min.	Max.
8	.812	0.938	.473	.400	.494	1.27	1.056	.4375-28UNEF	.297	1.633	.590	.5000-28UNEF	.240	.125
10	.938	1.062	.590	.400	.494	1.27	1.056	.5625-24NEF	.421	1.633	.717	.6250-24NEF	.302	.188
12	1.031	1.156	.750	.400	.494	.127	1.056	.6875-24NEF	.546	1.633	.834	.7500-20UNEF	.428	.312
14	1.125	1.250	.875	.400	.494	.127	1.056	.8125-20UNEF	.663	1.633	.970	.8750-20UNEF	.552	.375
16	1.219	1.344	1.000	.400	.494	1.27	1.056	.9375-20UNEF	.787	1.633	1.088	1.0000-20UNEF	.615	.500
18	1.312	1.438	1.125	.400	.494	1.27	1.056	1.0625-18NEF	.879	1.633	1.216	1.1875-18NEF	.740	.625
20	1.438	1.562	1.250	.535	.650	1.332	1.164	1.1875-18NEF	1.014	1.674	1.332	1.1875-18NEF	.740	.625
22	1.562	1.688	1.375	.535	.650	1.332	1.164	1.3125-18NEF	1.134	1.674	1.460	1.4375-18NEF	.928	.750
24	1.688	1.812	1.500	.568	.683	1.332	1.164	1.4375-18NEF	1.259	1.674	1.585	1.4375-18NEF	.990	.800

Shell size	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
	H	L		N	L		N	L	N	N	D	L
	Max.	Max. PIN	Max. SOCKET	Max.	Max. PIN	Max. SOCKET	Max.	Max.	Max.	REF	Cable range (mm)	REF
8	.812	2.354	2.202	.550	1.746	1.538	.560	1.768	.620	.571	3-6.5	2.309
10	.875	2.354	2.202	.675	1.746	1.538	0.685	1.768	.730	.814	4-8	2.309
12	1.000	2.354	2.202	0.803	1.746	1.538	0.813	1.768	.939	.814	4-8	2.309
14	1.125	2.354	2.202	0.920	1.746	1.538	0.930	1.768	.971	.930	5-10	2.309
16	1.188	2.486	2.272	1.047	1.746	1.538	1.057	1.768	1.179	1.120	10-14	2.309
18	1.438	2.486	2.272	1.165	1.746	1.750	1.175	1.768	1.266	1.180	13-18	2.309
20	1.438	2.684	2.470	1.290	1.918	1.750	1.301	1.980	1.427	1.296	13-18	2.385
22	1.625	2.684	2.470	1.418	1.918	1.750	1.430	1.980	1.522	1.496	18-25	2.385
24	1.719	2.684	2.470	.1.543	1.918	1.750	1.555	1.980	1.644	1.562	18-25	2.385

Product Dimensions


LPT02 (Box Mounting Receptacle)

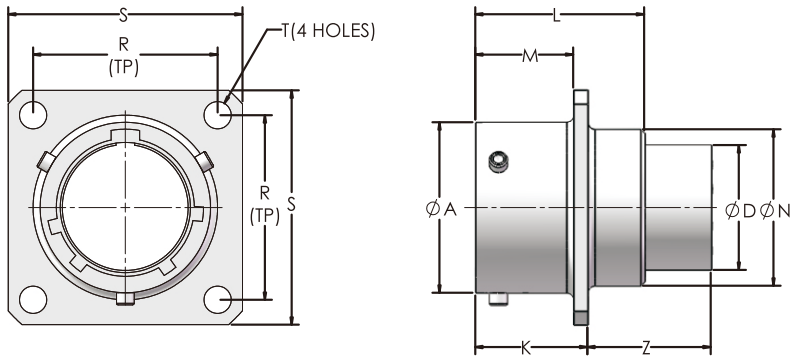

Shell size	Receptacle Front View			Receptacle side view							
	R	S	T	A	D	K	L	M	N	Z	
			±.005	+. 001 -. 005	Max.	+. 020 -. 010	Max.	+. 020 -. 010	Dia. Max.	Max.	
										PIN	SOCKET
8	.594	.812	.120	.473	.322	.493	.825	.431	.449	.777	.563
10	.719	.938	.120	.590	.439	.493	.825	.431	.573	.777	.563
12	.812	1.031	.120	.750	.557	.493	.825	.431	.699	.777	.563
14	.906	1.125	.120	.875	.678	.493	.825	.431	.823	.777	.563
16	.969	1.219	.120	1.000	.807	.493	.825	.431	.949	.777	.563
18	1.062	1.312	.120	1.125	.908	.493	.825	.431	1..073	.777	.563
20	1.156	1.438	.120	1.250	1.033	.650	1.076	.556	1.199	.682	.514
22	1.250	1.562	.120	1.375	1.158	.650	1.076	.556	1.323	.682	.514
24	1.375	1.688	.147	1.500	1.283	.683	1.109	.589	1.449	.649	.481

Product Dimensions

LPT06 (Straight Plug & Back Shells)

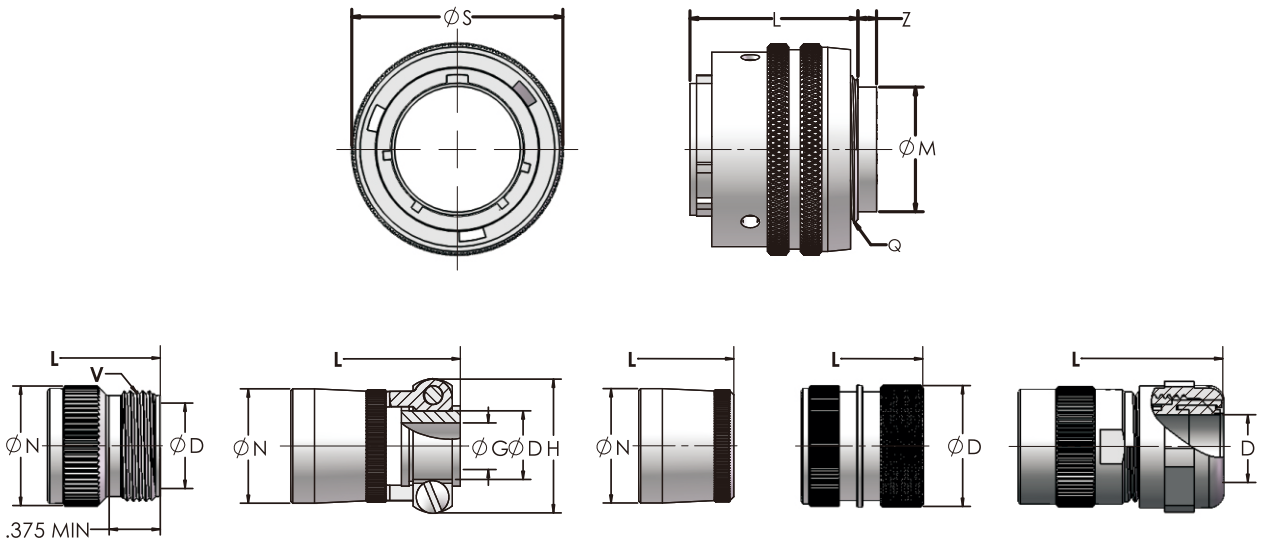


Class "A" Class"SE(SR)" Class"SE" Class"G" Class"PG"

Shell size	Plug Front View	Plug Side View					CLASS "A"				CLASS "SE(SR)"	
	S	L	M	Q	Z		D	L	N	V	D	G
	Max.	Max.	Max.	Thread Class 2A	Max. PIN	Max. SOCKET	Min.	Max.	Max.	Thread Class A	Min.	Max.
8	.750	.928	.322	.4375-28UNEF	.324	.110	.326	1.615	.590	.5000-28UNEF	.240	.125
10	.859	.928	.439	.5625-24NEF	.324	.110	.443	1.615	.717	.6250-24NEF	.302	.188
12	1.031	.928	.557	.6875-24NEF	.324	.110	.557	1.615	.834	.7500-20UNEF	.428	.312
14	1.156	.928	.678	.8125-20UNEF	.324	.110	.682	1.615	.970	.8750-20UNEF	.552	.375
16	1.281	.928	.807	.9375-20UNEF	.324	.110	.807	1.615	1.088	1.0000-20UNEF	.615	.500
18	1.391	.928	.908	1.0625-18NEF	.324	.110	.908	1.615	1.216	1.1875-18NEF	.740	.625
20	1.531	1.000	1.033	1.1875-18NEF	.248	.080	1.033	1.594	1.332	1.1875-18NEF	.740	.625
22	1.656	1.000	1.158	1.3125-18NEF	.248	.080	1.158	1.594	1.460	1.4375-18NEF	.928	.750
24	1.776	1.000	1.283	1.4375-18NEF	.248	.080	1.283	1.594	1.587	1.4375-18NEF	.990	.800

Shell size	CLASS "SE(SR)"				CLASS "SE"			CLASS "G"		CLASS "PG"		
	H	L		N	N	L		L	N	N	D	L
	Max.	Max. Pin	Max. Socket	Max.	Max.	Max. PIN	Max. SOCKET	Max.	Max.	REF	Cable range (mm)	REF
8	.812	2.336	2.122	.550	.540	1.728	1.520	1.750	.620	.571	3-6.5	2.291
10	.875	2.336	2.122	.675	0.665	1.728	1.520	1.750	.730	.814	4-8	2.291
12	1.000	2.336	2.122	0.803	0.793	1.728	1.520	1.750	.939	.814	4-8	2.291
14	1.125	2.336	2.122	0.920	0.910	1.728	1.520	1.750	.971	.930	5-10	2.291
16	1.188	2.468	2.254	1.047	1.037	1.728	1.520	1.750	1.179	1.120	10-14	2.291
18	1.438	2.468	2.254	1.165	1.155	1.728	1.520	1.750	1.266	1.180	13-18	2.291
20	1.438	2.604	2.390	1.290	1.281	1.838	1.670	1.900	1.427	1.296	13-18	2.305
22	1.625	2.604	2.390	1.418	1.410	1.838	1.670	1.900	1.522	1.496	18-25	2.305
24	1.719	2.604	2.390	1.543	1.535	1.838	1.670	1.900	1.644	1.562	18-25	2.305

Product Dimensions

LPT07 (Jam Nut Receptacle)

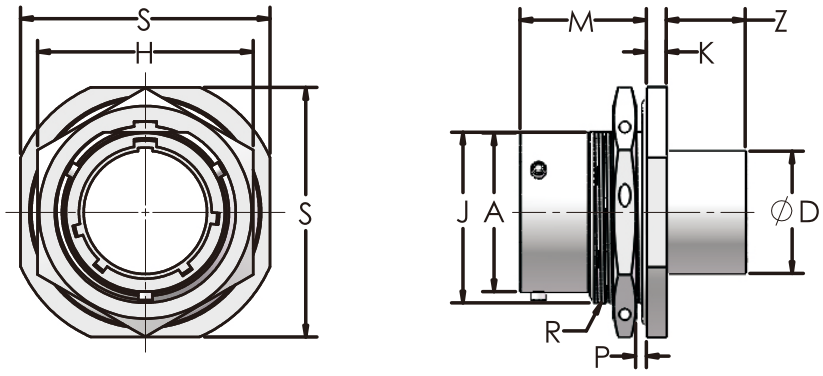

Shell size	Receptacle Front View					Receptacle side view						
	H ±.016	S	A +. 001 -. 005	D Dia. Max.	J Flat +. 001 -. 005	K +. 011 -. 010	M	P Panel thickness Min.	P Panel thickness Max.	R Thread Class 2A UNEF	Z Max. PIN	Z Max. SOCKET
8	.750	.938	.473	.322	.530	.125	.696	.062	.125	.5625-24	.450	.235
10	.875	1.062	.590	.439	.655	.125	.696	.062	.125	.6875-24	.450	.235
12	1.062	1.250	.750	.557	.818	.125	.696	.062	.125	.8750-20	.450	.235
14	1.188	1.375	.875	.678	.942	.125	.696	.062	.125	1.0000-20	.450	.235
16	1.312	1.500	1.000	.807	1.066	.125	.696	.062	.125	1.1250-18	.450	.235
18	1.438	1.625	1.125	.908	1.191	.125	.696	.062	.125	1.2500-18	.450	.235
20	1.562	1.812	1.250	1.033	1.316	.156	.884	.062	.250	1.3750-18	.292	.124
22	1.688	1.938	1.375	1.158	1.441	.156	.884	.062	.250	1.5000-18	.292	.124
24	1.816	2.062	1.500	1.283	1.566	.156	.917	.062	.250	1.6250-18	.260	.092


Assembly Instructions for Straight Plug

1.STRIP INSULATION




WIRES OR CABLE WITH OUTER JACKET STRIPPED

2.CRIMP CONTACTS IN ACCORDANCE WITH THE IPC-A-620 SPECIFICATION.

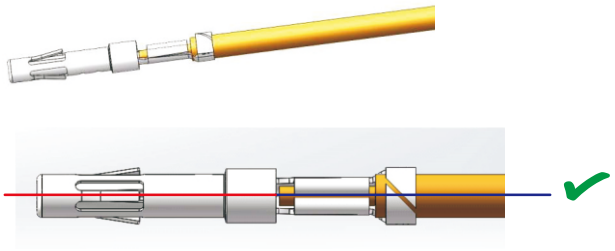

CONTACT COAXIAL, NO DEFORMATION




CONTACT DEFORMATION

3.CONTACT INSERTION/REMOVAL TOOL INFORMATION




Part Number	Description
TOOL-738651-020	for #20 male/female contact
TOOL-738651-016	for #16 male/female contact
TOOL-738651-012	for #12 male/female contact


STEP BY STEP ASSEMBLY PROCESS

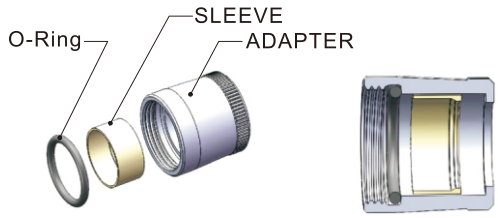


STEP1: PUSH THE SLEEVE AND O-RING INTO THE ADAPTER.

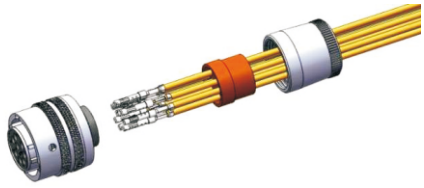

STEP2: PASS THE TERMINATED CONTACTS THROUGH THE ADAPTER AND GROMMET.

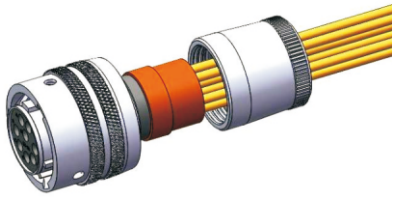

STEP3: ALIGN THE CONTACTS INTO THEIR CORRESPONDING INSERT HOLES. THEN SLIDE THE GROMMET UP THE WIRES CLOSE TO INSERT.

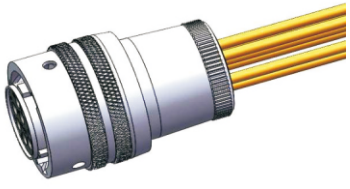

STEP4: USE A RECEPTACLE (IF POSSIBLE) AS A FIXTURE, SCREW ADAPTER ON TO BACK SHELL.

North America

Amphenol Industrial Product Group
191 Delaware Avenue
Sidney, NY 13838-1395-USA
Telephone: 888-364-9011 Fax:520-397-7169
www.amphenol-industrial.com

Asia

Amphenol Technology (Zhuhai) Co.,Ltd.
Address:No.63, Xinghan Rd, Phase 2, Science and Technology Industrial Park, Sanzao Town, Jinwan, Zhuhai, PRC
Tel: (86)756-3989725 Fax: (86) 756-3989768
www.amphenol-industrial.com

Notice: Specifcations are subject to change without notice. Contact your nearest Amphenol Corporation Sales Offce for the latest specifcations. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifcations are typical and may not apply to all connectors.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

135101-02-12.00 MB5RJN0601 T821106A1R100CEU L17D53018 RT001619PNH-K 97-3101A14S-6P D38999/24ZJ4PA T 3277 000 10124149-102LF 115101-20-M1.00 122116-15 97-3106A-22-9P(946) M83723/96W1624N MS27467T23B53A AT60-16-0144 D25S24B4GV00LF D38999/26ME35PN CL90555DT52413S D38999/20FE35SN DBM25P032N T 3437 000 65239-013LF AT60-14-0144 NPC-1220-030A1S PT06J-12-3S RL0-100-1-70RE 163X10049X 97-3106A-28-8S(936) FCE17-B25PM-280 SLPHPC70BSO2