
TE Connectivity: Every Connection Counts
© 2016 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

HEAT SHRINK BOOTS

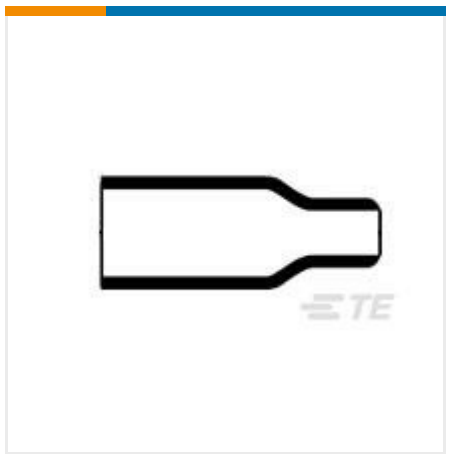

✔ Active

**TE CONNECTIVITY (TE)**

# 202A153-12-0

Raychem | CAP , CRPS

202A153-12-0
TE Internal Number: 811131-000
Alias ID: 7-1196304-2

EU RoHS Compliant
EU ELV Compliant

**Lipped** No

**Operating Temperature Range (°C)** -55 – 200

**Fluid/Chemical Resistance** Suitable for long term fluid immersion & elevated temperatures including fuel

**Adhesive Options** S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)

**Material Systems Code** 200

**PRODUCT DRAWING**
English

## DOCUMENTATION

### Product Drawings

**Boot, Straight, Overexpanded**
PDF
**English**

### Product Specifications

Product Specification

**Raychem Fluoro Elastomer Molded Components Flame-Retarded, Flexible, Heat-Shrinkable**
PDF
**English**

### Product Environmental Compliance

Safety Data Sheet

Downloaded from Arrow.com.

### Heat-Shrinkable Fluoropolymer Products

PDF

**English**

### Heat-Shrinkable Fluoropolymer Products

PDF

**German**

### Heat-Shrinkable Fluoropolymer Products

PDF

**French**

### Heat-Shrinkable Fluoropolymer Products

PDF

**Dutch**

### Heat-Shrinkable Fluoropolymer Products

PDF

**Italian**

### Heat-Shrinkable Fluoropolymer Products

PDF

**Spanish**

### Heat-Shrinkable Fluoropolymer Products

PDF

**Swedish**

## FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

**Molded Part Type** Molded Boot

Configuration Features

**Lipped** No

Body Features

**Material Systems Code** 200
**Adhesive Pre-Coat** No
**Material** Modified Fluoro-Elastomer

Dimensions

**Cable Diameter Range** 8.6 – 26.2 mm [ .339 – 1.031 in ]
**Wire/Cable Outside Diameter** .39 in, .43 in, .433 in, .47 in, .55 in, 10 mm, 11 mm, 12 mm, 14 mm

Usage Conditions

**Operating Temperature Range (°C)** -55 – 200

Downloaded from Arrow.com.

Operation/Application

**Power Cable Accessory** No

---

Industry Standards

**Government Qualified** No
**Approved Standards** BS-G-198-5-DD, DEF Std 59-97 Issue 3 Type DD, SAE AS I 81765/4

---

Other

**Fluid/Chemical Resistance** Suitable for long term fluid immersion & elevated temperatures including fuel
**Adhesive Options** S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F), S1255-04 Separate Adhesive, -55°C – 200°C (-67°F – 392°F)
**Adhesive Type** Adhesive Purchased Separately

## Statement of Compliance

PDF

---

Downloaded from Arrow.com.