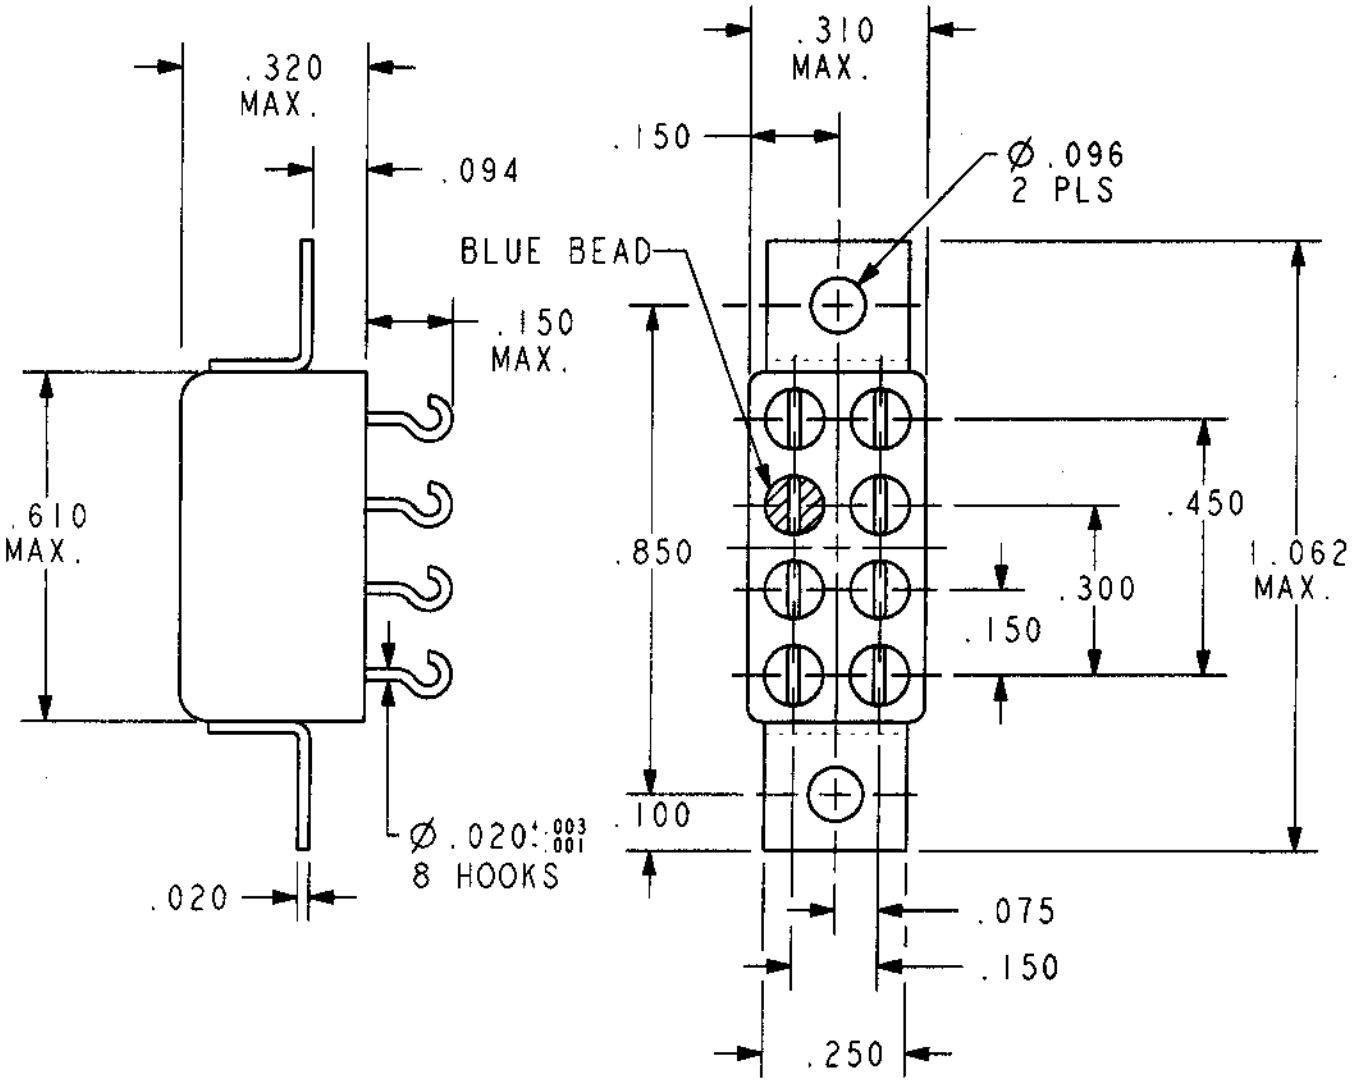


REV. 0

DCO 142960

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE	1350 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
RELEASE 6 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

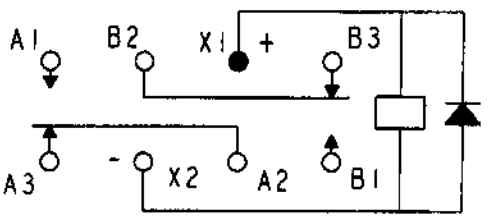

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. B.D. 5/31/01 | CK. TLG 5-31-01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/37-026L REV.

"3SBC" RELAY

3SBC1626A2

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1969656-1 917696-1 MPT100C18RF 1393431-1 141991-2 175977-2 2380312-2 936348-1 U5254-000005-030PA 2310537-1 CPF0402B37K4E1 2-292161-3 2377783-2 650075-000 TE50BR39J 1903112-2 2005330-1 2834055-1 1-962915-1 3631B101LL CRGCQ2010J3K3 ROX05SJ18R 1743455-2 SBCHE64R7K SMW73R0JT 1-794222-0 3-1393225-0 3430B2F51RTDF RH73H2A40MKTN SBCHE154R7K