



A/F无后盖有边直脚/DIP（5.5）

目錄 MAPX	设变内容 MODIFICATION	日期 DATE

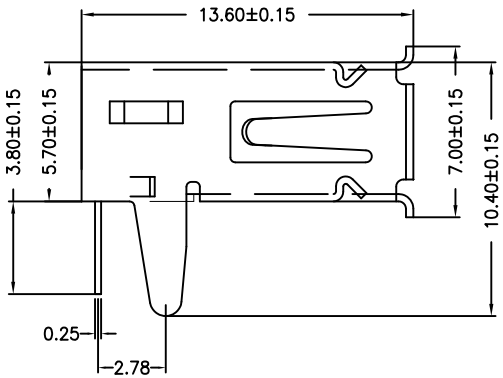

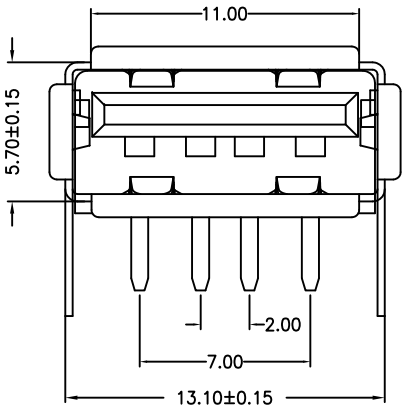

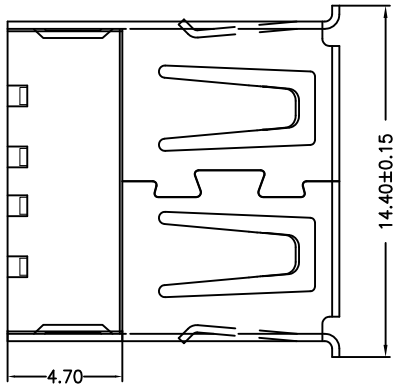

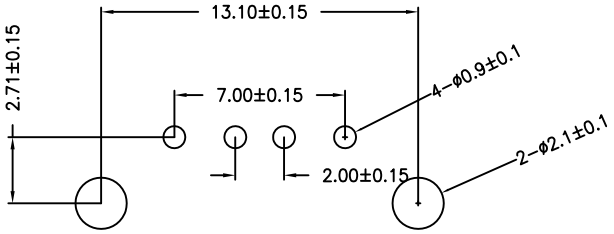

RBCOMMENDBD P.C.B PATTBRN LAYO UT

NOTES:
Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating: 1.5 AMP. 30V AC
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30 MΩ Max.
Dielectric Withstanding Voltage: 500W AC
Temperature Range: -35℃ to +85℃
Insulator color: Black/White
Plastic material: PBT/LCP/Others
Shell finish: Nickel plated/Tin-Lead plated
Mechanical:
Mating Force: 3.5KG MAX
Unmating Force: 0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.35	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.10	.XXX°	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	903-232A1017D10100
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF90度无后盖直脚有边内弹改模后铜壳一型5.25PBT白胶 高5.7
日期 DATE	2014.05.24	核准 APPD	雷永键	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

912-112A1011D10100 912-312A1012D10100 918-468K2029Y50000 907-111A1022D10200
920-A62A2021S10104 906-262A1021D10200 910-151A2021D10100 911-221A2021S10100
912-112A2021S10100 918-318K2023C40005 918-415K3028S40000 907-312A1101Y10210
908-351A1011D10100 917-P81A202ES60201 920-154A2021Y10110 920-A64A2091S101A3
920-C62A2021S10103 920-F52A2021S10105 904-232B2032S10100 904-331B2032S10200
906-752B1114D10200 917-B88C201AH70201 919-162A1012D10400 905-761A2032S10200
906-552A1012D10200 916-151A1022Y10200 904-232A2031S10100 918-418K2022Y40011
920-A62A2021S10108 920-C52A2021S10105