

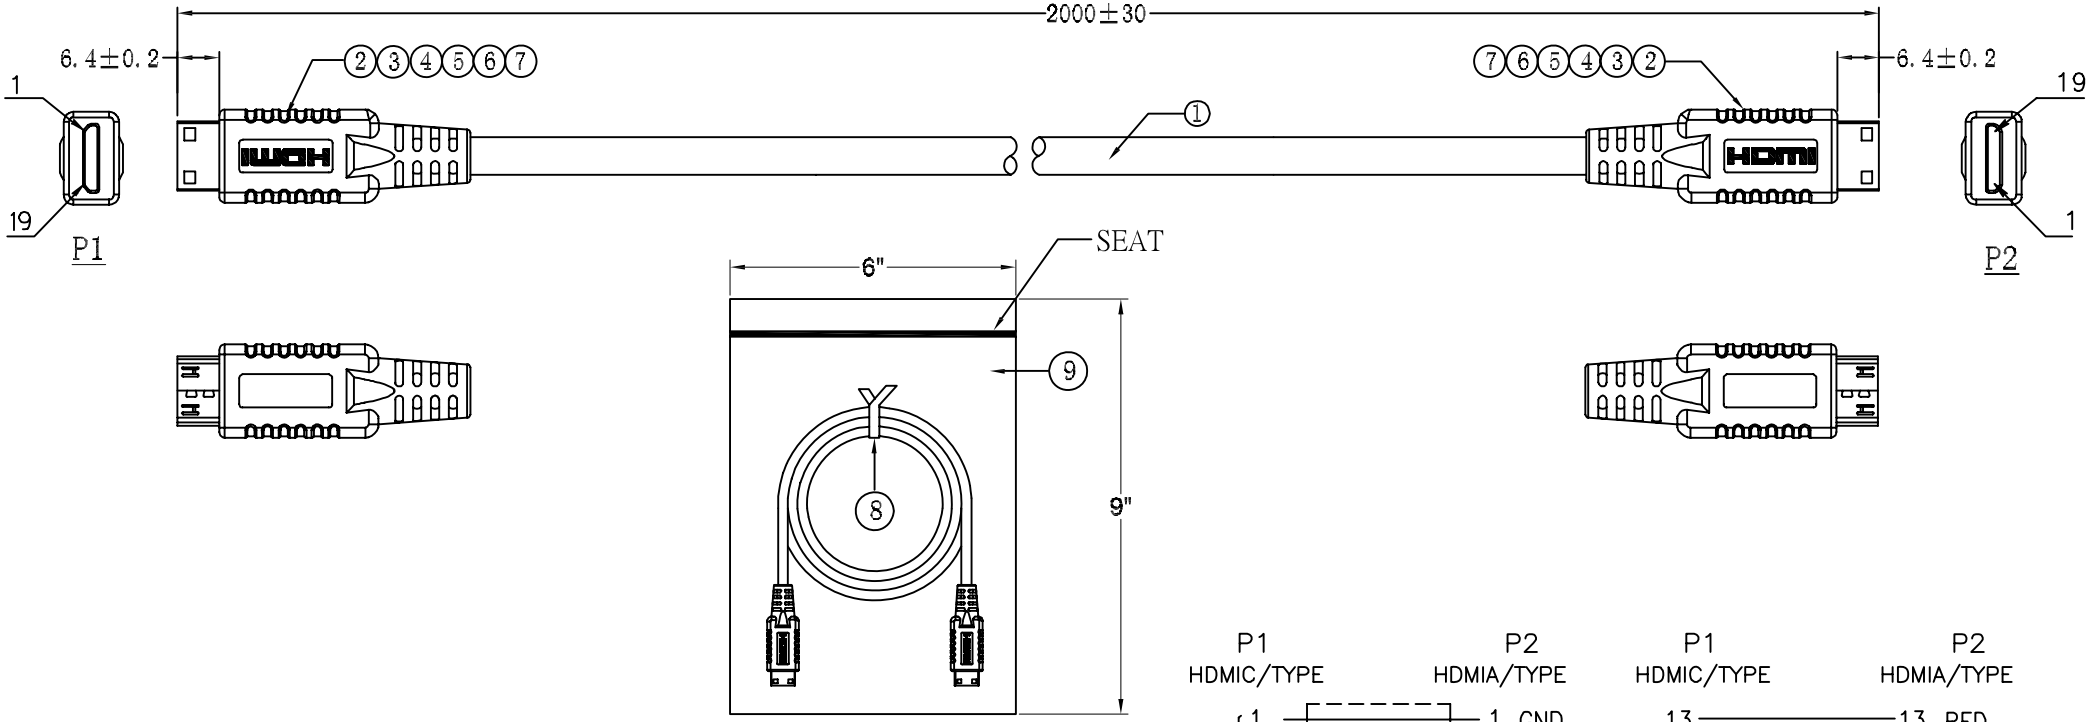


NOTE:
1. TEST:DC 300V/1s
2. INSULATION RESISTANCE:10m ohm
3. CONTACT RESISTANCE:2 ohm
4. PRODUCTS MEASURE UP TO THE ROHS
5. PVC TEGUMENT

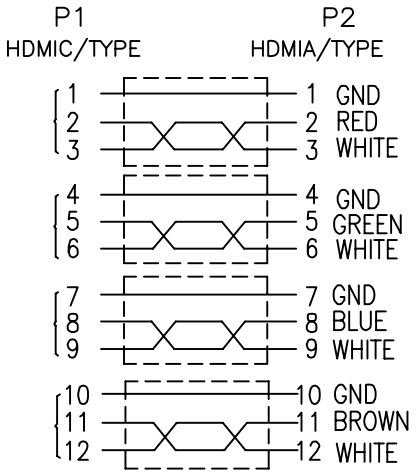

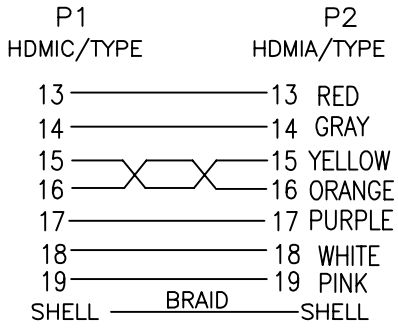

No	DESCRIPTION	QTY
9	PE BAG 6''*9''*0.04MM	1PCS
8	ELLIPTICAL CABLE TIE WITH CORE L=70MM	1PCS
7	TIN WIRE LEAD-FREE ø0.6 ROHS	0.45g
6	P1&P2 PVC , BLACK 45P	10g
5	CONDUCTIVE COPPER PLATINUM P1& P2.W:20MM*L:35MM	2PCS
4	GUMMED PAPER W:15MM	0.07m
3	PE1&P2 TRANSPARENT PE INTERAL MODEL MATERIALS,LOW DENSITY	4g
2	HDMI C TYPE MALE: SHORT BODY PIN G/F,IRON SHELL-PLATED NICKEL,INSULATION BLACK	2PCS
1	UL20276[30AWG(7/0.10TS)*1P+EA+AL/MY]*4+30AWG(7/0.10TS)*1P+30AWG(7/0.10TS)* 5C+AEB(16/6/0.12AM) OD:6.0mm PVC BLACK TEGUMENT CUT L=990±10mm(LS)	1PCS

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表			CnC Tech, LLC					
				TITLE: HDMI C/M TO C/M CABLE PVC				
X.X ±0.38	X.X° ±3.00°	APPD:	PRODUCT NO: 742-20010-00200					
X.XX ±0.25	X.XX° ±2.00°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE	
X.XXX ±0.10	X.XXX° ±1.00°	DRAW:	2013.08.20	1:1	mm	Z	1 / 1	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

512-26-8800-BL-0007F 3239-16-1-0500-005-1-TS 10064-30-1-0500-007-1-TS 1007-18-1-2000-007-1-TD
302-28-26-GR-0100F 3522-20-0100-99 521-26-04-SV-014F 743-60010-00200 1002-003-02000
1569-18-1-0500-008-1-TS 3521-08-0101-99 911S-2-5-00700-PL CNC-SAE-16-183-002
1007-20-1-2000-007-1-TS 102-1030-BE-00100 3135-18-1-0500-005-1-TS 520-26-4400-SV-0010F
1332-22-1-0500-001-1-TS 3221-26-0300-00 3132-22-1-0500-001-1-TS 51025-10-0100-01
521-26-04-SV-005F 523-26-6600-SV-0010F 1569-22-1-0500-007-1-TS 2000-1-2-41-00-BK
3122-18-1-0500-002-1-TS 3132-24-1-0500-002-1-TS 3239-20-1-0500-002-1-TS 1569-22-1-0500-006-1-TS
3135-18-1-0500-003-1-TS