


ROHS

http://www.okhro.com

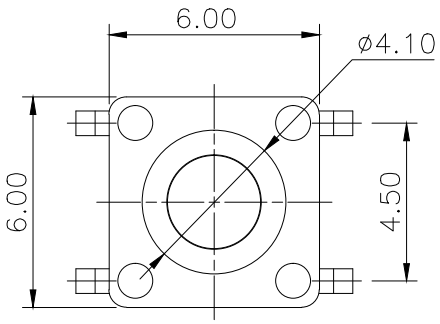






Circuit Diagram

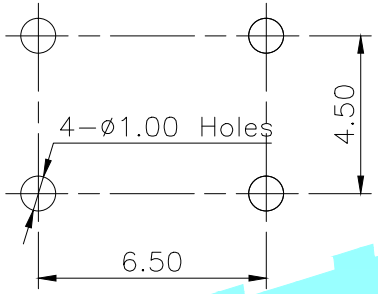

PCB Layout(Pattern side)

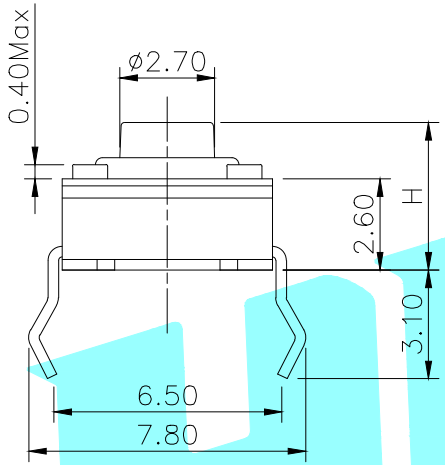

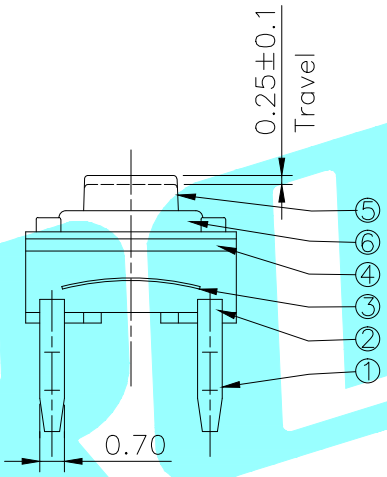



Typical Specifications
1.Rating : DC 12V 50mA
2.Contact Resistance: ≤100mΩ
3.Lnsulation Resistance: ≥100mΩ DC250V
4.Operating Temperature Range: −25°C~+85°C
5.Ambient Humidity Used: ≤85%RH
6.Travel:0.25±0.1mm
7.Life : 100,000 Cycles
8.IP Rating: IP66

NO.1	
PART NO	H
A	4.3
C	5
G	7

NO.2	
PART NO	vigor
3	180±30
4	250±30

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4−NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Cover	——	1	Brass	Tin Plated	——
⑤	Keystoke	——	1	Nylon	Red	——
④	Waterproof Silicone	——	1	Silica gel	Black	——
③	Contact	——	1	F.Ag/SUS	Plating silver	——
②	Base	——	1	Nylon	Black	——
①	Terminal	——	4	Copper(0.3t)	Plating silver	——

APPROVALS		DATE
DRAWN	J.X.Zhang	2014/6/13
CHECKED		
APPROVALS		

HRO韩荣® ELECTRONICS CO.,LTD

TOLERANCES ARE			ANGLE
	30~以上	±0.30	
	10~30	±0.20	
	5~10	±0.15	
	~ 5	±0.10	±2°

TITLE:	TACT SWITCHS	
PART NO.	K2−1110DP−□□□W−□□	
UNIT: mm	SCALE: 1:1	PROJ:
DRAWING NO.	——	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K3-2258S-E1 K5-1617SA-01 K8-5851D-L1 DS-01BP K2-1102SP-A5SC-04 DA-10RP K2-1101DF-A4DW-01 K2-1102BG-I4CW-01 K2-1102SP-K4SC-04 SS-22D03-G4 U-F-M5DD-W-L U-M-M5DD-W-2 ES-07KP PJ-3250-5A U-F-M5DS-Y-1 PJ-399B-6A TYPE-C-31-M-04 U-C-M5SS-Y-1 U-F-M5DD-Y-L U-F-M5DD-Y-L1 K2-1102DP-S3SW-04 K3-1346S-F1 DQ-03BP K2-1102AT-A4CW-01 K2-1102DP-G4SW-04 K2-1818DP-A3SW-01 SIM-08A U-C-M5DW-W-1 U-F-M5SS-W-5 DC-031A-10A