

NPN Silicon Phototransistors
Types OP600A, OP600B, OP600C

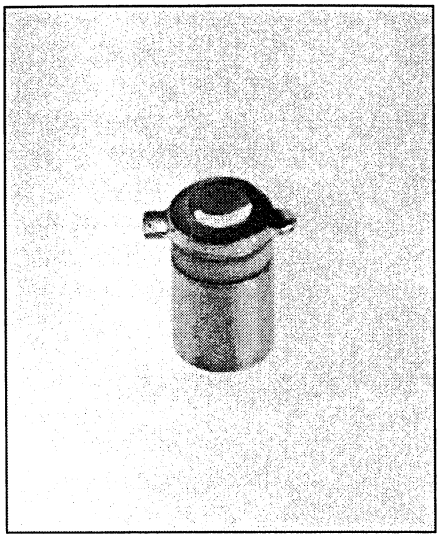

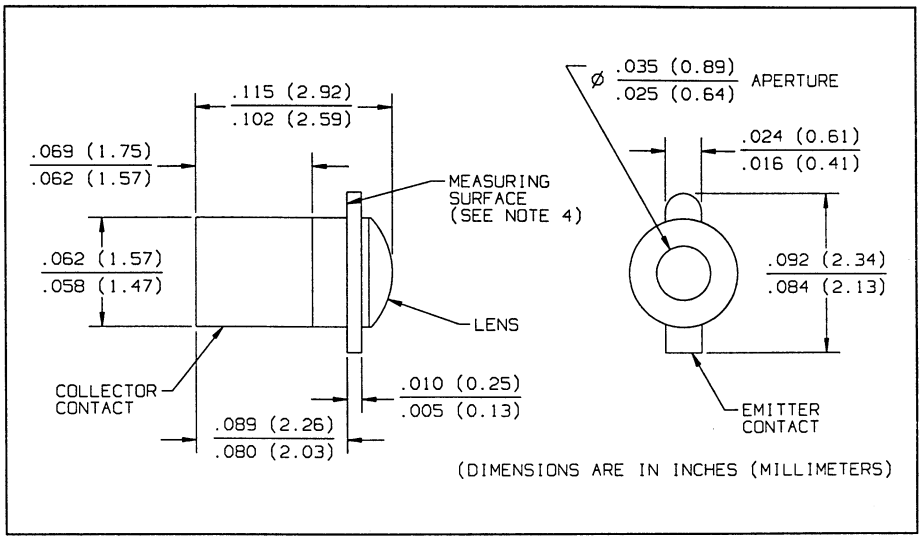

Features

- Narrow receiving angle
- Variety of sensitivity ranges
- Enhanced temperature range
- Ideal for direct mounting in PC boards
- Mechanically and spectrally matched to the OP123 and OP223 series devices
- TX/TXV processing available (see Hi-Rel section)

Description

The OP600 series device consists of an NPN silicon phototransistor mounted in a hermetically sealed "Pill" type package. The narrow receiving angle provides excellent on-axis coupling. These devices are 100% production tested using infrared light for close correlation with Optek GaAs and GaAlAs emitters.


Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Collector-Emitter Voltage	25 V
Emitter-Collector Voltage	5.0 V
Storage Temperature Range	-65° C to +150° C
Operating Temperature Range	-65° C to +125° C
Soldering Temperature (5 sec. with soldering iron)	260° C(1)(2)
Power Dissipation	50 mW(3)
Continuous Collector Current	50 mA


Notes:
(1) Refer to Application Bulletin 202 which discusses proper techniques for soldering Pill type devices to PC boards.
(2) No clean or low solids, RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
(3) Derate linearly 0.5mW/° C above 25° C.
(4) Junction temperature maintained at 25° C.
(5) Light source is a GaAlAs LED, peak Wavelength = 890 nm, providing an irradiance of 2.5 mW/cm^2. The source irradiance is not necessarily uniform over the entire lens area of the unit under test.

Typical Performance Curves

Typical Spectral Response

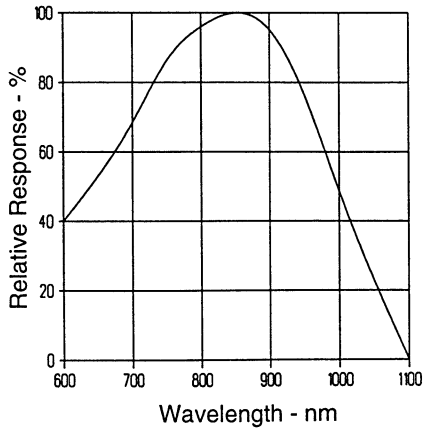

Coupling Characteristics of OP123 and OP600

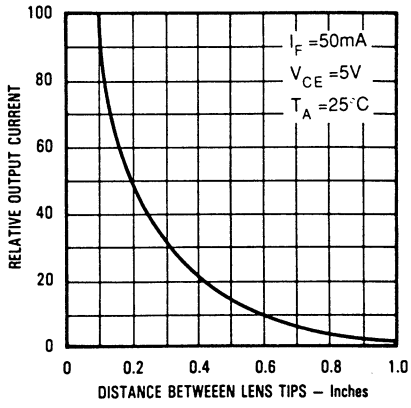

Types OP600A, OP600B, OP600C


Electrical Characteristics (T_A = 25° C unless otherwise noted)

SYMBOL	PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITIONS
$I_{C(ON)}$[4]	On-State Collector Current	OP600C OP600B OP600A	0.30 0.60 1.20		1.8	mA mA mA	V_{CE} = 5 V, E_e = 2.5 mW/cm^2[5]
I_{CEO}	Collector Dark Current					nA	V_{CE} = 10 V, E_e = 0
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage		25			V	I_C = 100 µA
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage		5.0			V	I_E = 100 µA
$V_{CE(SAT)}$[4]	Collector-Emitter Saturation Voltage				0.40	V	I_C = 0.15 mA, E_e = 2.5 mW/cm^2[5]
t_r t_f	Rise Time Fall Time			15 15		µs µs	V_{CC} = 5 V, I_C = 0.80 mA, R_L = 1 kΩ, See Test Circuit


PHOTOSENSORS

Typical Performance Curves


Collector Dark Current vs. Ambient Temperature

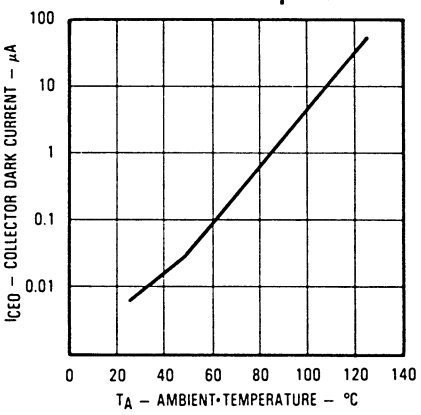


Normalized Collector Current vs. Ambient Temperature

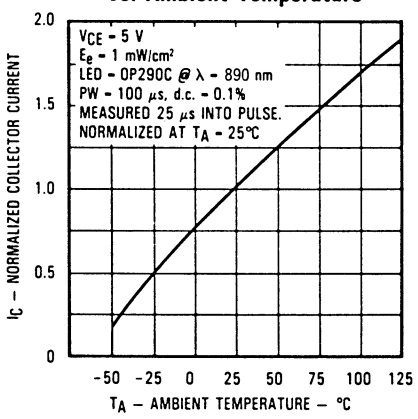


Rise and Fall Time vs. Load Resistance

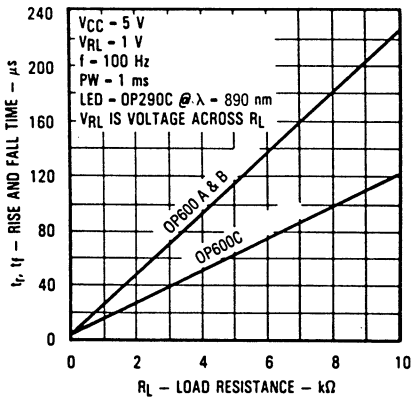

Normalized Collector Current vs. Angular Displacement

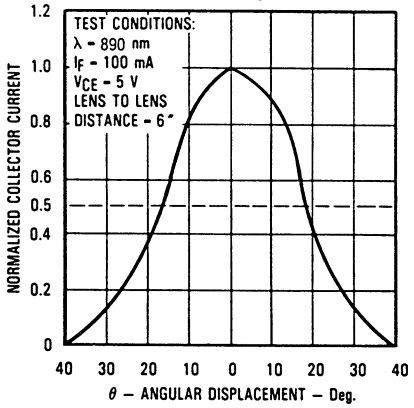

Switching Time Test Circuit



Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TT Electronics:

OPB802W55Z P160KNP-0QC20A10K WCR0805-82KFI 67WR5KLFTB ASC1206-150KFT5 RC55Y-210KBI BPR10101J MFR3-10RFC WDBR122RKT WH10-100RJI WH25-8R2JI APC0805RD-10KBT5 OARS-XP-0R001 OPB829CZ OVLBB4C7 WH5-50RJI WP4S-1R5JA2 LR1206-R10FW LRMAP3920C-R001FT PCF0402PR-180RBT1 PCF0603PR-1K-BT1 WCR1206-200KFI WA84-180RJI CAW104R70JLF MFC0805-R10FT5 PCF0603R-100KBT1 W24-33KJI WHS3-33RJA1 OAR5 - R020FI SQP7S-82RJB15