MURR ELEKTRONIK
stay connected

SVS Eco valve form BI 11mm 230V 2+PE field-wireable M16x1,5

Form BI (11 mm)
0...230 V AC/DC, without components
metric

Image



Vicarious picture

Approvals

Form	
	30005
Technical Data	
Operating voltage	12...230 V AC/DC
Operating current per contact (40 °C)	max. 10 A
Connection diameter	0.5...1.5 mm²
Clamping range (cable diameter)	6...8 mm
Contact figure	Cable outlet can be turned in 180° steps
Compression gland	M16 × 1.5 mm
Protection	IP65 when plugged and screwed down (EN 60529)
Temperature range	-40...+80 °C
Commercial data	
Net weight	25
Weight unit	gram
Basic unit	pc.
Customs tariff number	85366990
Unit (piece)	1
Limited value	1
Comments	
	Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/13

Contact layout

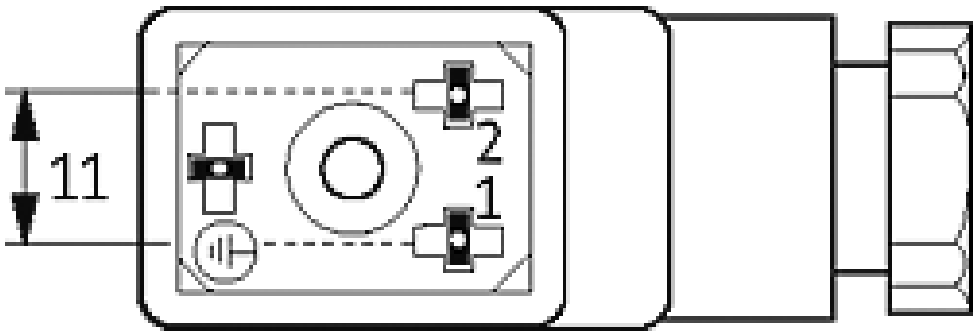

Circuit diagram

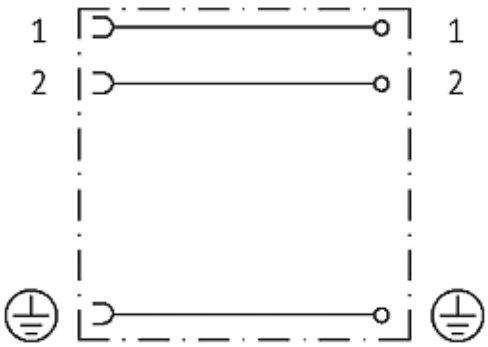

Dimension drawing

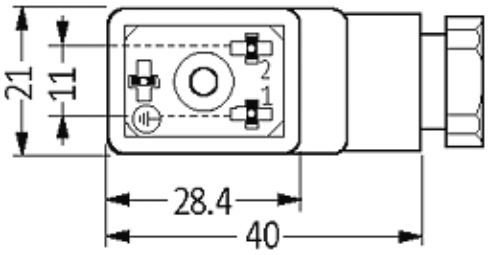

Height: 31 mm

All data on this data sheet was compiled carefully.
Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/13