

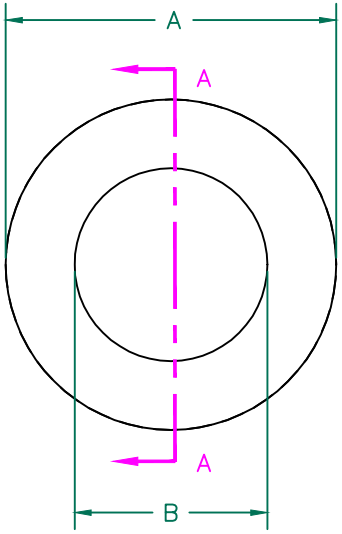


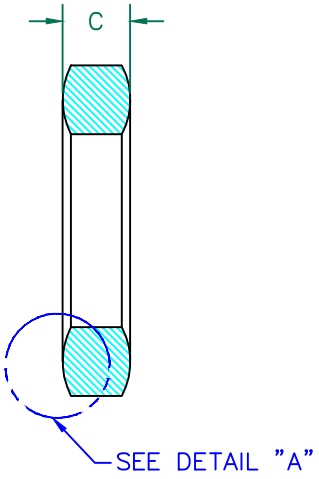


SECTION A–A

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	60 Ω	135 Ω	285 Ω
Minimum	- Ω	108 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

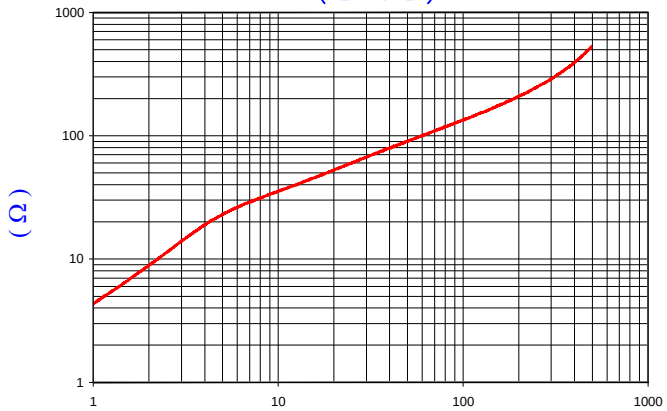

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture, REF.3131



DETAIL "A"
SCALE 3:1

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI–QA–038.

FERRITE CORE DIMENSIONS (SPEC): mm [Inches]

	BARE DIMENSIONS		28B2400–000
A	60.96 [2.400]	±	1.22 [.048]
B	35.56 [1.400]	±	0.71 [.028]
C	12.70 [.500]	±	0.38 [.015]

WEIGHT/1000 109.37 kgs [241.12 Lbs]

RoHS

REV	DESCRIPTION	DATE	INT
	DIMENSIONS ARE IN MM [INCHES].		
J	UPDATE COMPANY LOGO	05/22/15	QIU
H	UPDATE Z SPECS AND COMPANY LOGO	06/25/04	JRK
G	CHG P/N FROM 00*, REMOVE COATING SPECS	06/25/04	JRK
F	UPDATE COATING DIMS, REM FLAT from CHAMFER DETAIL, ADJUST R. DIM, UPDATE PART WGT. UPDATE Z SPECS	10/15/03	JRK
E	UPDATE FORMAT & Z SPECS, CURVE&TOLS	07/23/03	JRK

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

Laird

PROJECT/PART NUMBER: 28B2400–000	REV: J	DRAWN BY: DJB	
DATE: 07/03/90	SCALE: .75:1	MATERIAL: FERRITE	
CAD #: 28B2400–000–J	TOOL #: B2400		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Laird:

CMX1211Z680B-10 LFB095051-000 TYS30126R8M-10 28A2005-0A2 MP1040-100 0097061102 28B0500-100 DM3312X101R-10 MGV201610R68M-10 MI0805M221R-10 0097064502 A15754-04 LI0603B201R-10 LI0603G221R-10 28A0392-0A2 DA1206D301R-10 NS1050HA 29220104 CC1812C513R-10 HF0402B102R-10 MI1210K600R-10 TRA6927M3PBN-001 24296254 28A1507-0A2 CMX1211Z601B-10 28R1141-010 CM3440Z171R-10 HI0805O121R-10 HI1206N680R-10 28B0734-000