Fair-Rite Products Corp.
Your Signal Solution®

Toroids (5977000301)

Part Number: 5977000301

77 TOROID

Explanation of Part Numbers:
– Digits 1 & 2 = Product Class
– Digits 3 & 4 = Material Grade
– 9th digit 1 = Parylene Coating, 2 = Thermo-Set Plastic Coating

A ring configuration provides the ultimate utilization of the intrinsic ferrite material properties. Toroidal cores are used in a wide variety of applications such as power input filters, ground-fault interrupters, common-mode filters and in pulse and broadband transformers.

All toroidal cores are supplied burnished to break sharp edges.

Coating Options:
– Toroids with an outside diameter of 9.5 mm (0.375″) or smaller can be supplied Parylene C coated. The Parylene coating will increase the “A” and “C” dimensions and decrease the “B” dimension a maximum of 0.038 mm (0.0015″). The ninth digit of a Parylene coated toroid part number is a “1”. See reference tables for the material characteristics of Parylene C. Parylene C coating is RoHS compliant.
– Toroids with an outside diameter of 9.5 mm (0.375″) or larger can be supplied with a uniform coating of thermo-set plastic coating. This coating will increase the “A” and “C” dimensions and decrease the “B” dimension a maximum of 0.5 mm (0.020″). The 9th digit of the thermo-set plastic coated toroid part number is a “2”. Thermo-set plastic coating is RoHS compliant.
– Thermo-set plastic coated parts can withstand a minimum breakdown voltage of 1000 Vrms, uniformly applied across the “C” dimension of the toroid.

For any toroidal core requirement not listed in the catalog, please contact our customer service department for availability and pricing.

The C dimension may be modified to suit specific applications.

Weight: 2 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	12.7	±0.25	0.5	_
B	7.15	±0.20	0.281	_

Dim	mm	mm tol	nominal inch	inch misc.
C	4.9	-0.25	0.188	_

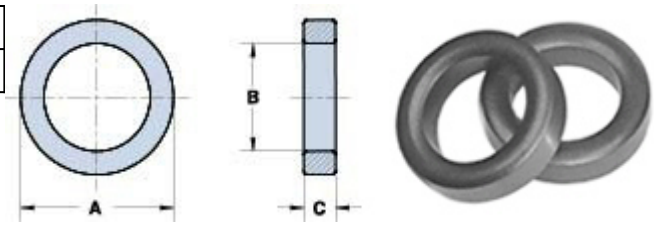


Chart Legend

$\Sigma l/A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross-Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor

Electrical Properties	
A_L(nH)	1180 ±25%
Ae(cm^2)	0.129
$\Sigma l/A$(cm^{-1})	22.9
l_e(cm)	2.95
V_e(cm^3)	0.38

Toroids are tested for A_L values at 10 kHz.

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Fair-Rite:

2873006802 5943011101 5977001721 5978003801 0444177081 2944666661 5943000911 0446167281
2643801102 2867000102 5943018601 2675821502 2743002112 0199000005 0446164951 0461178181
2643801002 5943000501 5961003801 5977000301 2677006302 5975001101 3078990851 444173951
2661000801 2673022401 2961666631 4077296011 2675665702 2643626502