


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/06/10	XXXXXX	INITIAL RELEASE
A	09/09/10	2096	CHANGE GASKET TO A ROUN O-RING

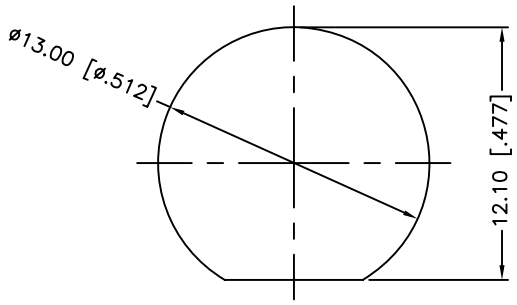

RECOMMENDED
MOUNTING HOLE

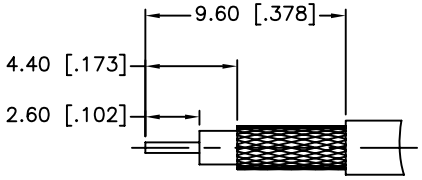

RECOMMENDED
CABLE STRIPPING DIM'S

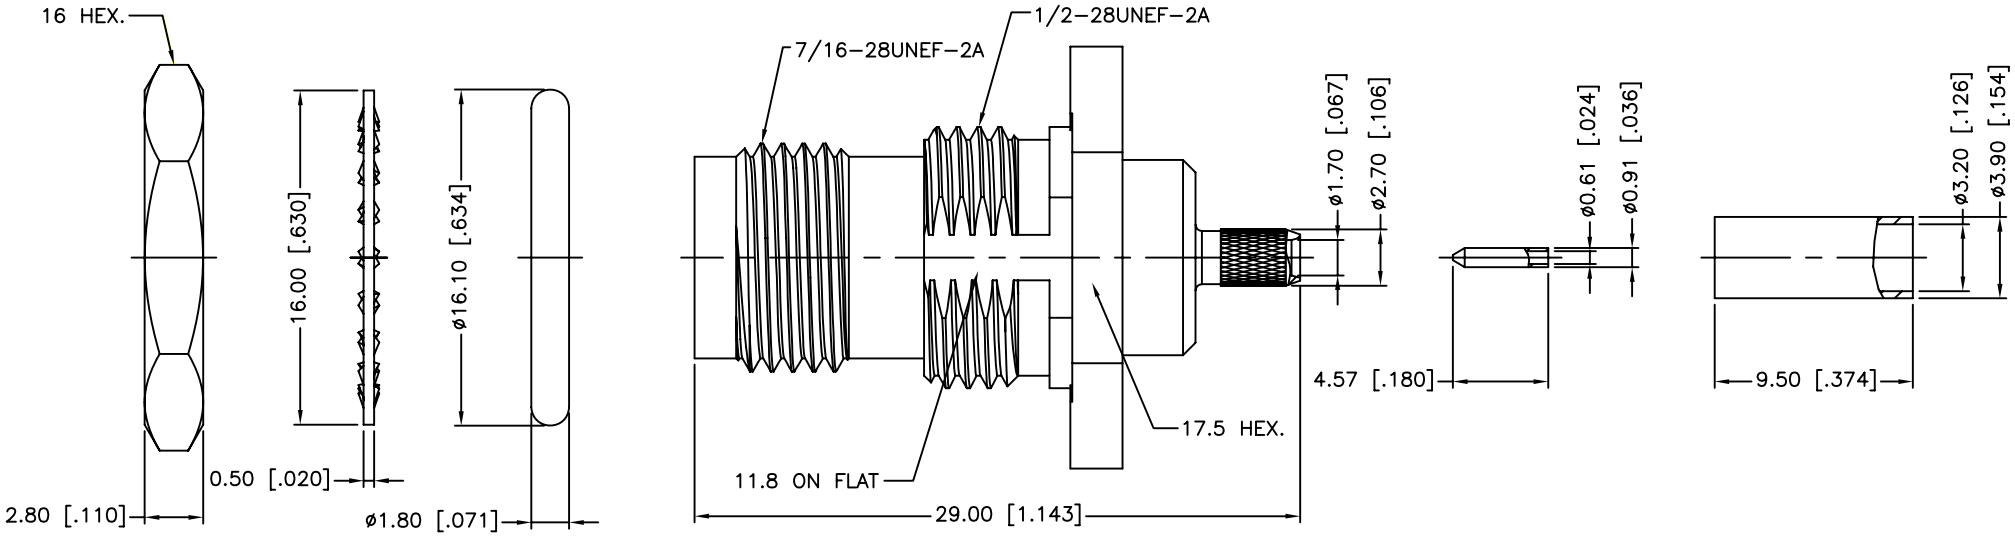

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
   SQ. CRIMP SIZE 0.7 MM
3. SEALED TO IP67.

	DESCRIPTION	MATERIAL	FINISH	QTY
10	HEX NUT	BRASS	NICKEL	1
9	LOCK WASHER	BRASS	NICKEL	1
8	GASKET	SILICONE	RED	1
7	FERRULE	BRASS	NICKEL	1
6	CONTACT PIN	BRASS	GOLD	1
5	RETAINING RING	BRASS	NICKEL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	GASKET	SILICONE	RED	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	09/09/10
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/122192-15RP.DWG

Amphenol Connex

PART DESCRIPTION
RP-TNC BULKHEAD CRIMP JACK, IP-67 COMPLIANT
(FOR RG-174 AND 316U CABLE)

PART NO. 122192-15RP

DWG. NO.	REV.	SIZE	SCALE
122192-15RP.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

69192-408HLF 86130202123355E1LF CD15S13E4RV09LF RJSBE5080C2 70234-112LF LD15P33E4GV00LF LD25S33E4GV00LF 54202-S08-07LF 68001-108HLF 86093488314745V1LF 863013A91614-403ALF 95157-140LF 65781-158 68000-236HLF 68002116HLF 76384-316LF DCMF37P RJE061661210 70218-1116LF 70430-164LF 54202-G0805CLF 86093967896755LF 86093968813H45V1LF DAPO15S365TLF DEM09P032N 86093968191755E3LF D15P13A6RV12LF 67996-204HLF 68001-200HLF