

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
1CH22- 4




CIRCUIT DIAGRAM

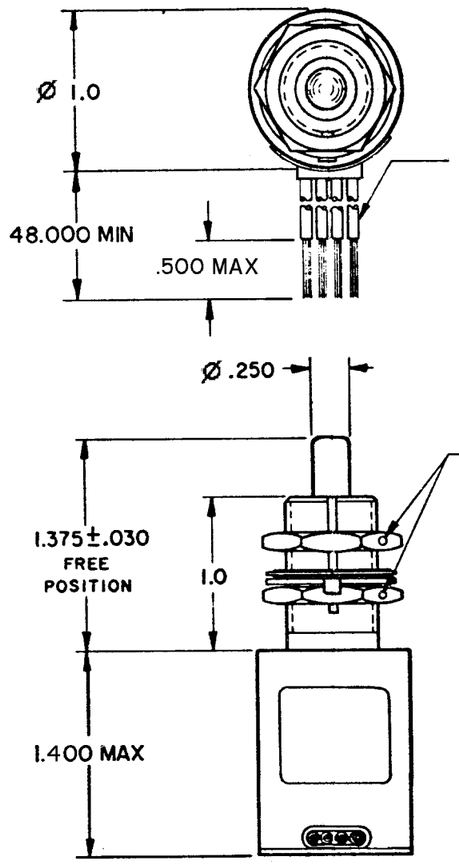

4X NO. 14 WIRE LEAD PER SPEC MIL-W- 5086 TYPE I MARKED WITH CIRCUIT IDENTIFICATION AND WIRE GAGE (1-14, 2-14, ETC) PER MIL-W-5088

Ø .047 HOLE FOR WIRE LOCKING

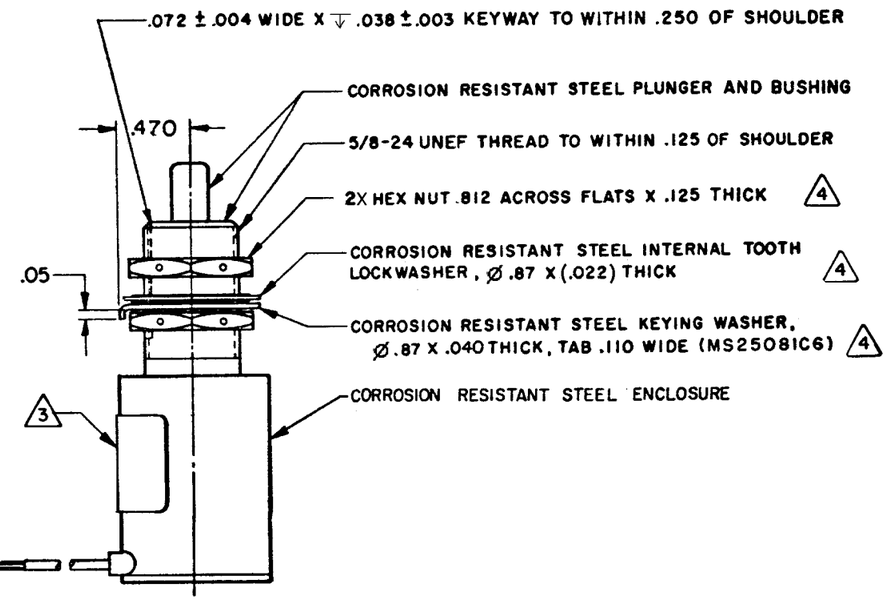

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 7.0 OZ MAX

CHARACTERISTICS

OPERATING FORCE	6-13 LB
FULL OVERTRAVEL FORCE	30 LB MAX
RELEASE FORCE	4 LB MIN
PRETRAVEL	.100 MAX
DIFFERENTIAL TRAVEL	.020 MIN
OVERTRAVEL	.180 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
1X S P N C 1X S P N O

LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	

NOTES

1 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 2
2 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010. OF PLUNGER TRAVEL
3 - CATALOG LISTING, MICRO IDENTIFICATION, CIRCUIT DIAGRAM AND DATE CODE ARE SHOWN ON NAMEPLATE
4 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

ANSI Y14.5M-1982 APPLIES

REPLACES X31003
RELEASE NO. SR 11661
CATALOG LISTING 1CH22-4
ISSUE M 12
PAGE 1 OF 1

REVISIONS
A CO-95348-B DLM 16 FEB 00

	CHECK	CHECK	CHECK	CHECK
DRAWN	DLM 16FEB00	SAV 16FEB00		

FORMTEK

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Honeywell:

SZL-VL-S-G-N-M SZL-WLC-A-N LSZ1UB SSCDRNT1.6BAAA3 SZL-VL-E SSCDLNN001PDAA5 SSCMRNN600MDAA5 SSCMRRN005PD7A3 SZL-WLC-A TSCSMNN100PDUCV LSZ1R SSCDRNN100PG2A5 3150U 00090147 LSZ53 SSCSNBN005PDAA5 LSZ4012 SSCDANN150PG2A3 SSCDRRN001PD2A5 SSCDRRN005PD2A3 SSCDANT030PASA5 SSCMANN006BGAA3 SZRMY21PAC110120V 14CX1 1865-13G-LDN 3106 00030136 LSZ1MB LSZ55D SSCDRRN060MDAA5 V15H16-CZ300A02-K SZL-VL-S-B-N-M