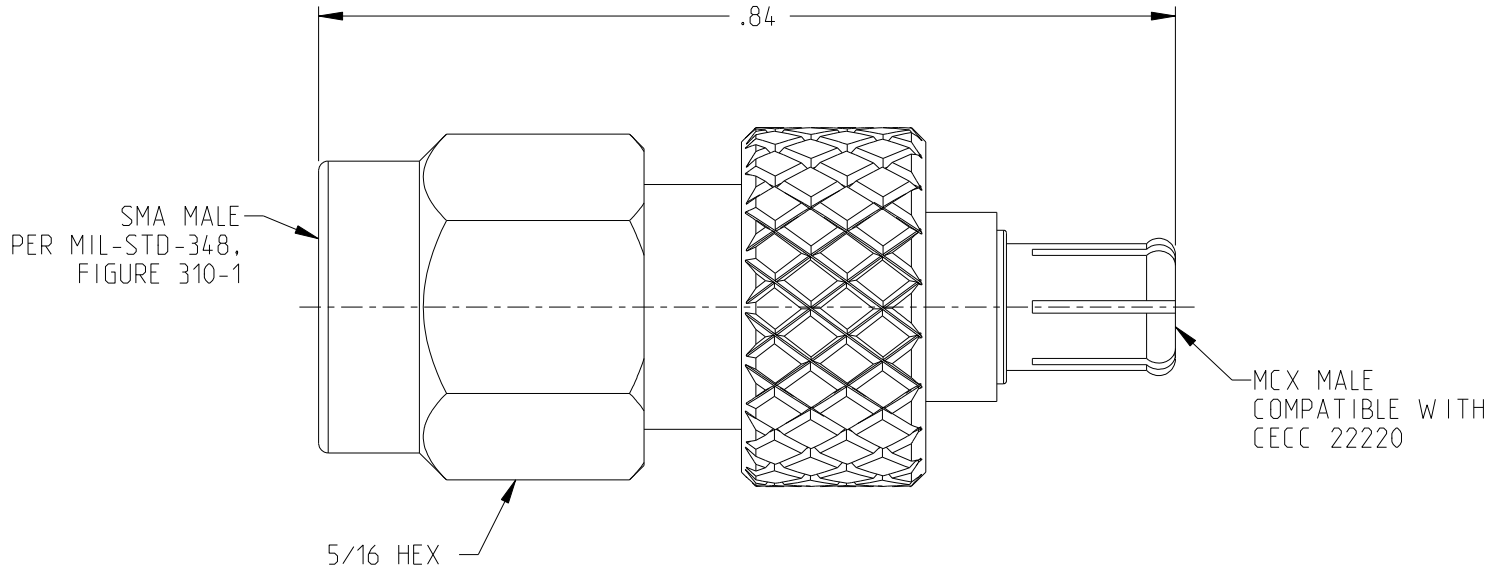


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND FINISH
   1.1 BODY: GOLD PLATED BRASS
   1.2 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: PTFE

2. ELECTRICAL SPECIFICATIONS
   2.1 FREQUENCY RANGE: DC TO 6 GHz
   2.2 IMPEDANCE: 50 OHMS NOMINAL
   2.3 VSWR (MAXIMUM): 1.20:1

cinch CONNECTIVITY SOLUTIONS a bel group

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

3RD ANGLE PROJECTION

RoHS2 ☑ 2015/863/EU

UNLESS OTHERWISE SPECIFIED UNITS: INCH

.XX ±.02
FRACTIONS ±1/64
ANGLES ±2°

MIDWEST MICROWAVE

Title: MCX MALE TO SMA MALE ADAPTER

Model No. CGM-1060-SM-MCM-09

Size A | DO NOT SCALE DRAWING | Date: 12/5/2022 | Sheet 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

DD2466134 108-0913-001 135-3402-001 145-0701-821 147-0701-241 147-0701-832 40-98443N-C 415-0043-MM250 415-0536-012 12-141 40-9715HM 415-0030-MM150 8-141 C0909A18-11PN-106 DEUH-9P 142-0403-011 30-9506-88 30-9516 M24308/4-5F 415-0203-024 CN0967C10A20P6-040 111-0102-001 21-14-M5.0 ATT-0263-04-SMA-02 CJ70-7 M49142/03-0005 CN1021A14G03P8-040 131-3701-306 145-0693-002 415-0028-048