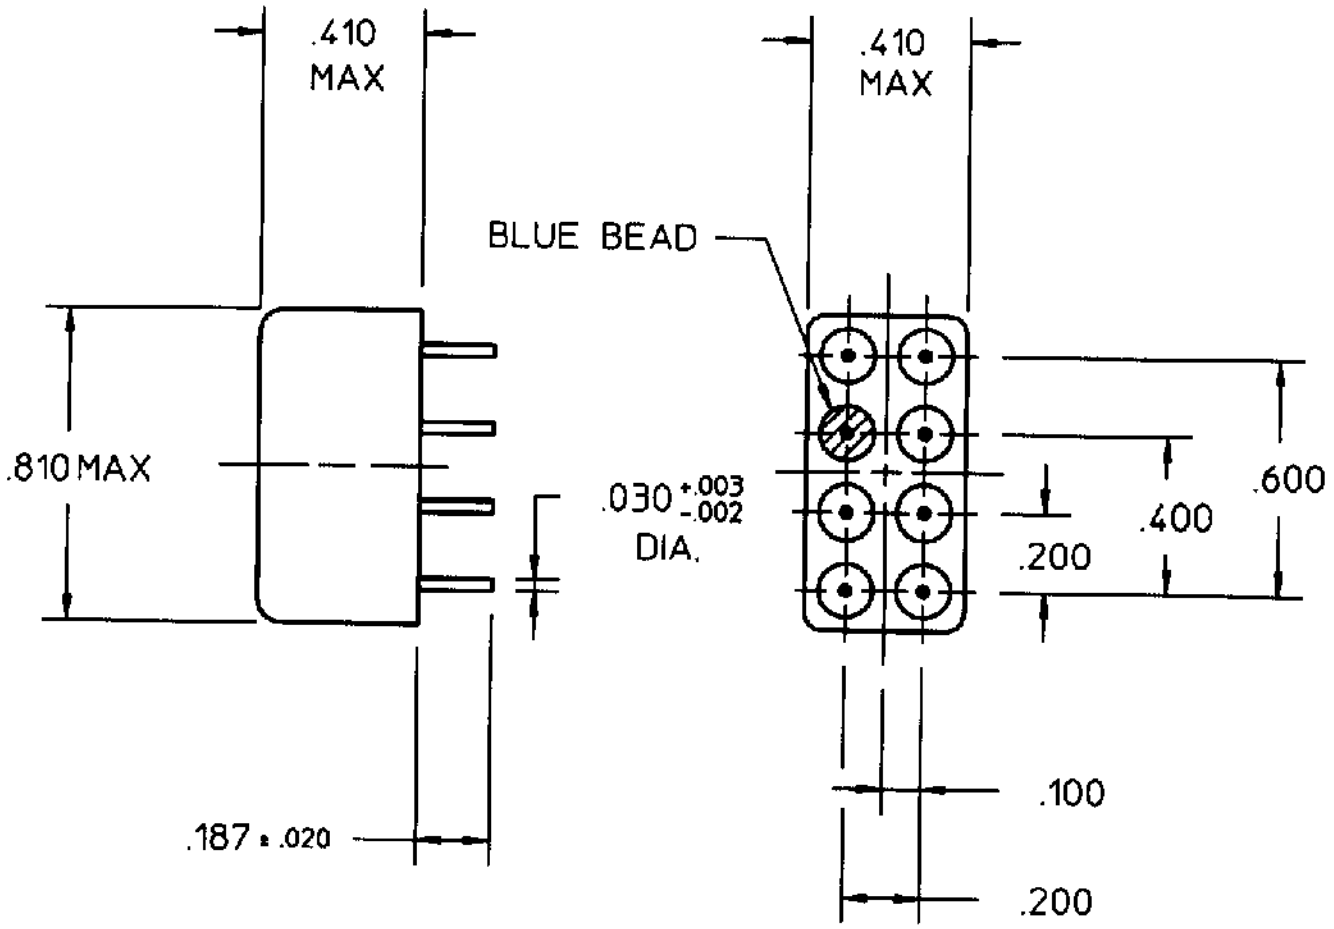


COIL: @ +25 °C

RESISTANCE	160 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.2 VDC
MUST RELEASE	0.7 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -24 VDC WITH BIFILAR COIL

CUSTOMER DATA SHEET

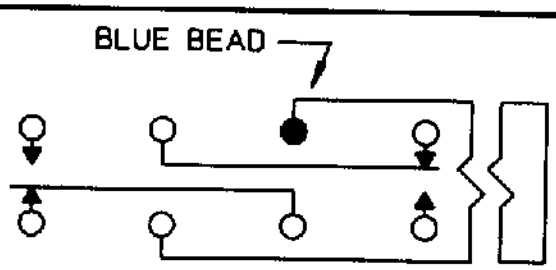

CONTACT RATING: LOW LEVEL TO 2A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/1/91 | CK. V1/01 MB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/22-016M

TYPE "HMB" RELAY

HMB1201G01M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

HMB1201G01M