



ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE






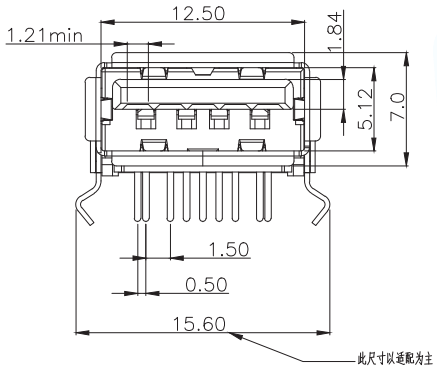



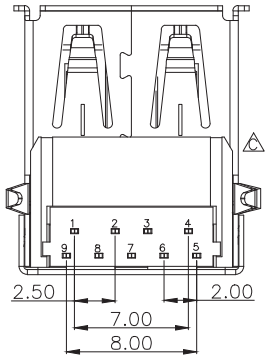

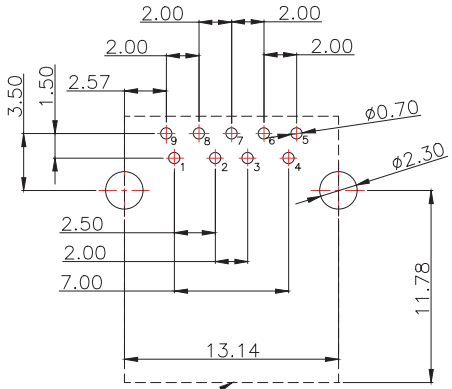


Remark:
1.MATERIAL:
1.1 Housing:thermoplastic plastics.
1.2 terminals:Copper Alloy
1.3 Shell:Copper Alloy/SPCC.
2.characteristics:
2.1 Rating Voltage : 30V AC.
2.2 Rating Current:PIN1&PIN4(Vbus&Correponding ground PIN)
1.8A MAX Other PINS 0.25A min.
2.3 Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ
2.4 Insulation Resistance:100 MΩ MIN.
2.5 Withstanding Voltage:AC 100V between adjacent contacts
2.6 Mating force：3.57Kgf MAX(35N MAX)
2.7 Extraction force:1.02Kgf Min(10N Min)
2.8 Life test:1500Cycles MIN.
2.9 Temperature Range：−55℃～+85℃.


Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	StdA_SSRX−
2	D−	6	StdA_SSRX+
3	D+	7	GND_DRAIN
4	GND	8	StdA_SSTX−
Shell	Shield	9	StdA_SSTX+

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: USB 3.0 AF 90度 卷边	
DECIMALS: / ANGLES:		PAR	USB−301WD−ARY
.X:±0.30 / .X°:±3°		DWN	
.XX:±0.20 / .XX°:±2°		CHKD	
.XXX:±0.10	CUSTOMER COPY	APVD	
		SCALE1:1	UNIT:MM
		SIZE:A4	SHEET:1F1 REV:A


ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE






每盒100PCS.

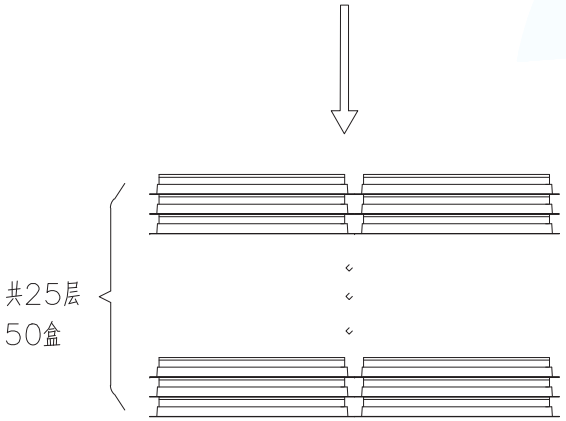

25盒分两层放入纸箱中,上层10盒/捆,下层15盒/捆
每箱内放两排50盒,共5000PCS产品.

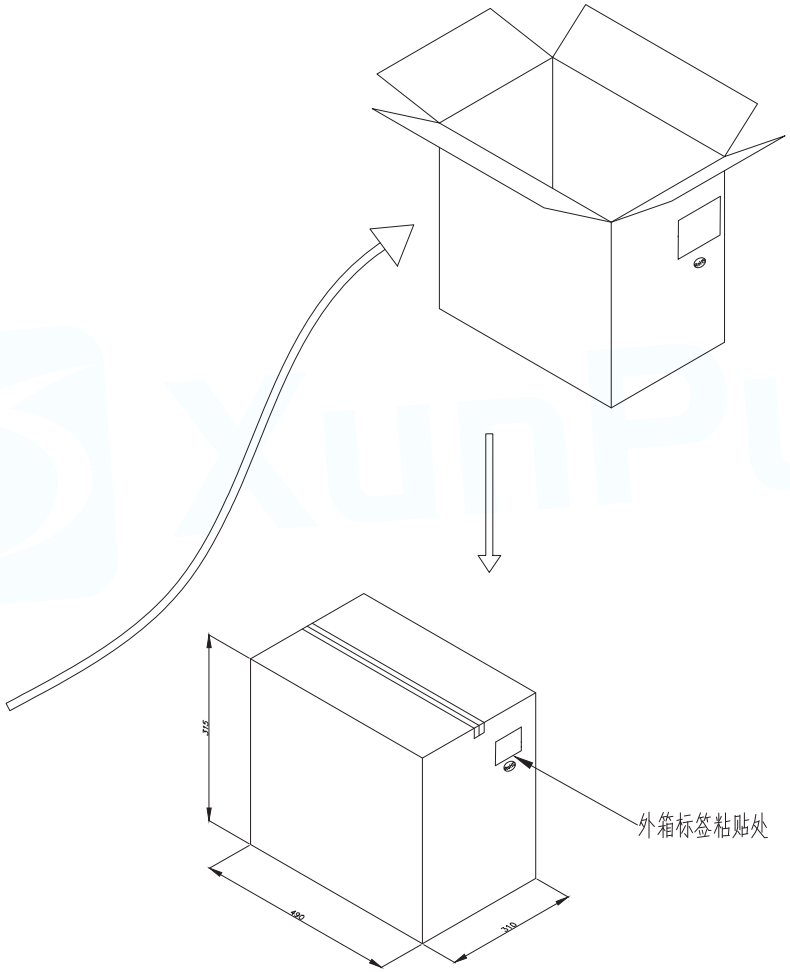

备注:

1.将全检后的良品如图示摆入PVC透明吸塑盒中,每盒包装100PCS,摆好后,盖好上盖,贴上QC标签

2.将装好产品的吸塑盒每箱放两排,每排放两捆。放入规格为490*310*315mm的纸箱中,每箱装5000PCS.

3.用透明胶工字型封箱,用美纹胶纸贴上我司产品标签,出货前需更换为业务提供的客户标签.QC PASS章盖于我司产品标签上.RoHS标签贴于客户标签对应位置.

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: USB 3.0 AF 90度 卷边 包装图		
		PAR	USB-301WD-ARY	
DECIMALS: / ANGLES:		DWN		
.X:±0.30 / .X°:±3°		CHKD		
.XX:±0.20 / .XX°:±2°		APVD		
.XXX:±0.10	CUSTOMER COPY	SCALE1:1	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

WAFER-XH2.54-4PWZ-H62 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-4PWCR-H20
SMA-KWE-323C-H13X23-LW FPC-0.5AX-24PWCR-H20 FPC-0.5FX-14PWCR-H20 FPC-0.5AL-6PB
WAFER-MX1.25B-8PWB WAFER-PH2.0-11PZZ WAFER-PH2.0-6PWB WAFER-VH3.96-4PLB
DC-031A-A100 PHB2.0-02-20PZZ WAFER-PH2.0-2PJK WAFER-PH2.0-3PWB FPC-0.5FX-20PWBH15
FPC-1.0HF-4PWAR-H20 TYPEC-304YDSW-ACP16 WAFER-GH1.25-6PLB WAFER-PH2.0-8PLB
FPC-0.5AS-5PWCR-H20 FPC-1.0AX-14PWCR-H25 HDMI-212L MU-103-ARW64 RJ45-005-014-11
WAFER-WBM4.2-16PJK-GB FPC-1.0AX-4PWCR-H25 FPC-0.5FX-16PWCR-H20 FPC-0.5FX-4PWBH15
FPC-0.5HF-10PWBR-H20