

环保物料


TEL:0769-82001899

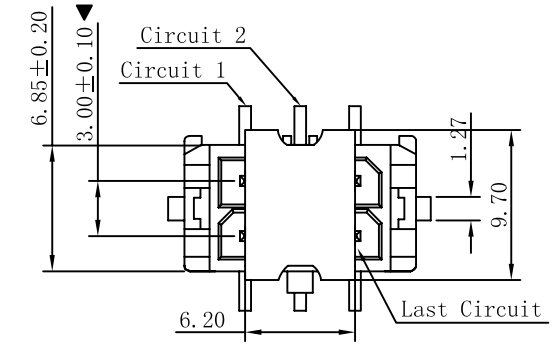



WITH CAP VIEW




WITHOUT CAP VIEW

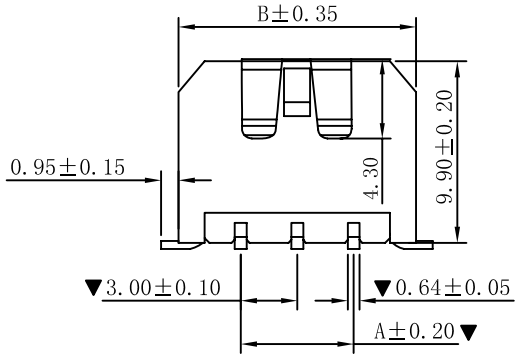

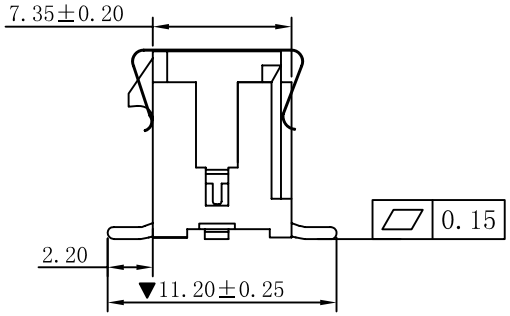

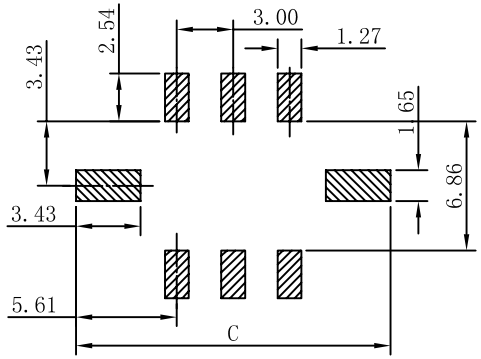

P.C.B. LAYOUT



SPECIFICATIONS

1.Voltage rating: 250V AC, DC
2.Current rating: 5A, AC, DC
3.Withstanding Voltage: 1500V AC/minute
4.Insulation resistance:1000MΩ min
5.Temperature range: -25°C-+85°C
6.Contact resistance: 10mΩ max

WAFER
Housing Material: LCP UL 94V0
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with :P3025-2xXX series Housing
Poles:02-24P
Part No.: M3025VS-2xXX-BK
Pin位数

PART NO.	Dimensions(mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN 兴飞连接器有限公司
XFCN CONNECTORS CO.,LTD.

PRODUCT NAME	3.00mm Crimp Style Connectors
PART. NO.	M3025VS-2xXX-BK

SHEEI	1/1
DATE	2020.04.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

P1257-04P XF-P00065 M2545V-02P TT44080080-0820 XF-2501L3003P3 PZ200V-11-08P T2026PS-2 XF-P000143 M2010V-04P XF-P000237 M1250VS-05P PZ200V-11-05P XF-12571503P3 XF-P000159 XF-P000167 XF-P000223 XF-P00115 M2016V-08P P1257-05P XF-P00001 XF-P00092 XF-P00099 XF-P00126 PZ254V-11-11P XF-P00014 XF-P000141 F1001-T-16-25T-R F1003-ZV-26-25T-R M2010V-07P M2016V-05P