
RoHS COMPLIANT

Pulse Electronics
www.pulseelectronics.com

NOTES:


1. CONNECTOR MATERIAL:
   HOUISING: PA66 BLACK UL94 V-0
   SHIELD:Brass
   SHIELD PLATING: NICKEL
   CONTACT: COOPER ALLOY
   CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHS MIN IN CONTACT AREA
2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
4. THE PART IS RECOMMENDDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260°C MAX, 10 SECS MAX.
5. OPERATING TEMPERATURE T=-40°C TO +85°C.
6. STORAGE TEMPERATURE T=-40°C TO +85°C.
7. All CRITICAL DIMENSIONS WITH "*"
8. PACKAGING INFORMATION: 50 PCS/ TRAY, 1200 PCS/BOX.

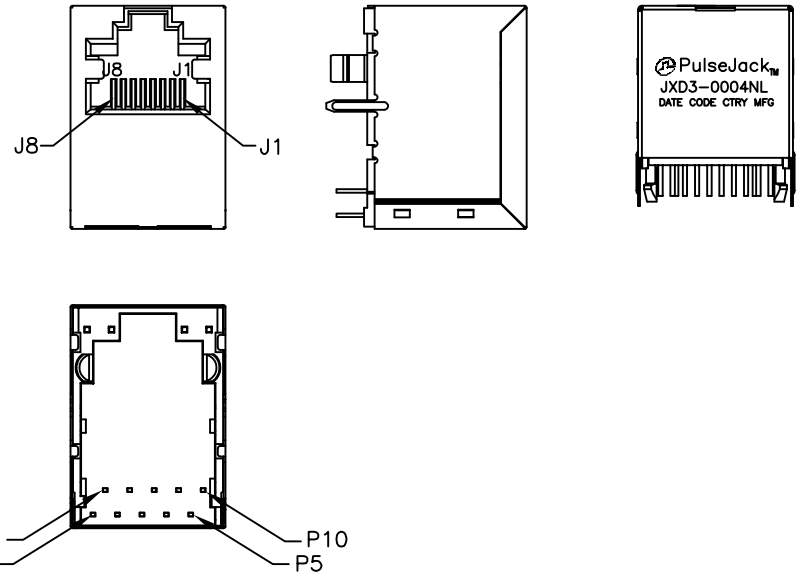

FINAL OUTLINE

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/15/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD3-0004NL-X1	-	1 OF 5	JXD3-0004NL	A

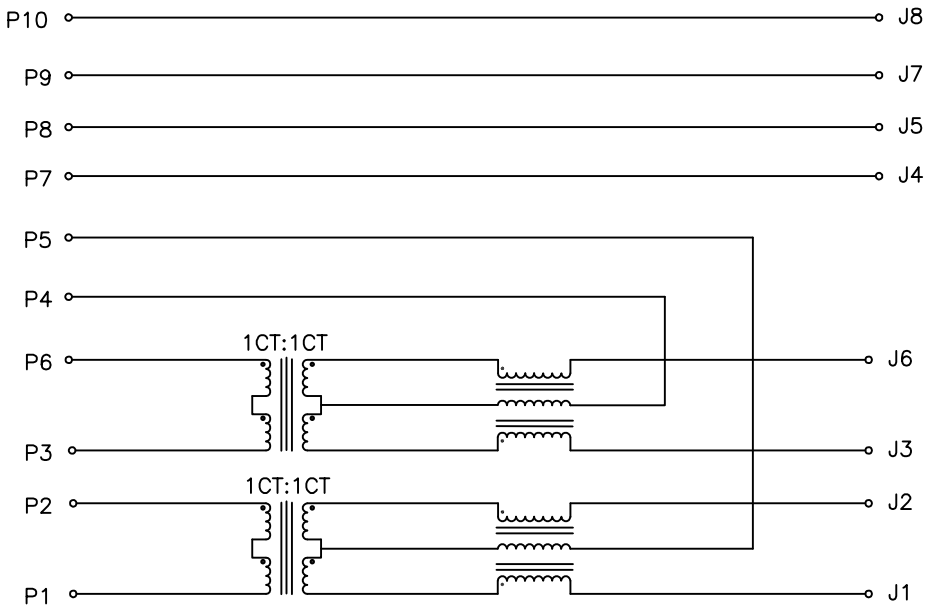

ELECTRONICAL SPECIFICATIONS:

1.0 TURN RATIO @100KHz: (P1~P2):(J1~J2) = 1:1±5%
(P3~P6):(J3~J6) = 1:1±5%

2.0 PRIMARY INDUCTANCE: 350uH MIN @100KHZ, 0.1V 8mA DC BIAS

3.0 DC RESISTANCE: (J1~J2):(J3~J6) 1.2 OHMS MAX

4.0 INSERTION LOSS: 1–100MHz –1.2dB MAX

5.0 RETURN LOSS: 1–30MHz –16dB MIN
30–60MHz –12dB MIN
60–80MHz –10dB MIN

6.0 CROSS TALK: 1–100MHz –30dB MIN


7.0 COMMON TO COMMON MODE ATTENUATION: 1–100MHz –30dB MIN

8.0 ISOLATION: PHY SIDE TO LINE SIDE: 500 VAC

9.0 DC CURRENT/VOLTAGE RATING–PSE PINS: 350mA @57V(CONTINUOUS)

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/15/15)


E–MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PULSEELECTRONICS.COM(Asia) PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

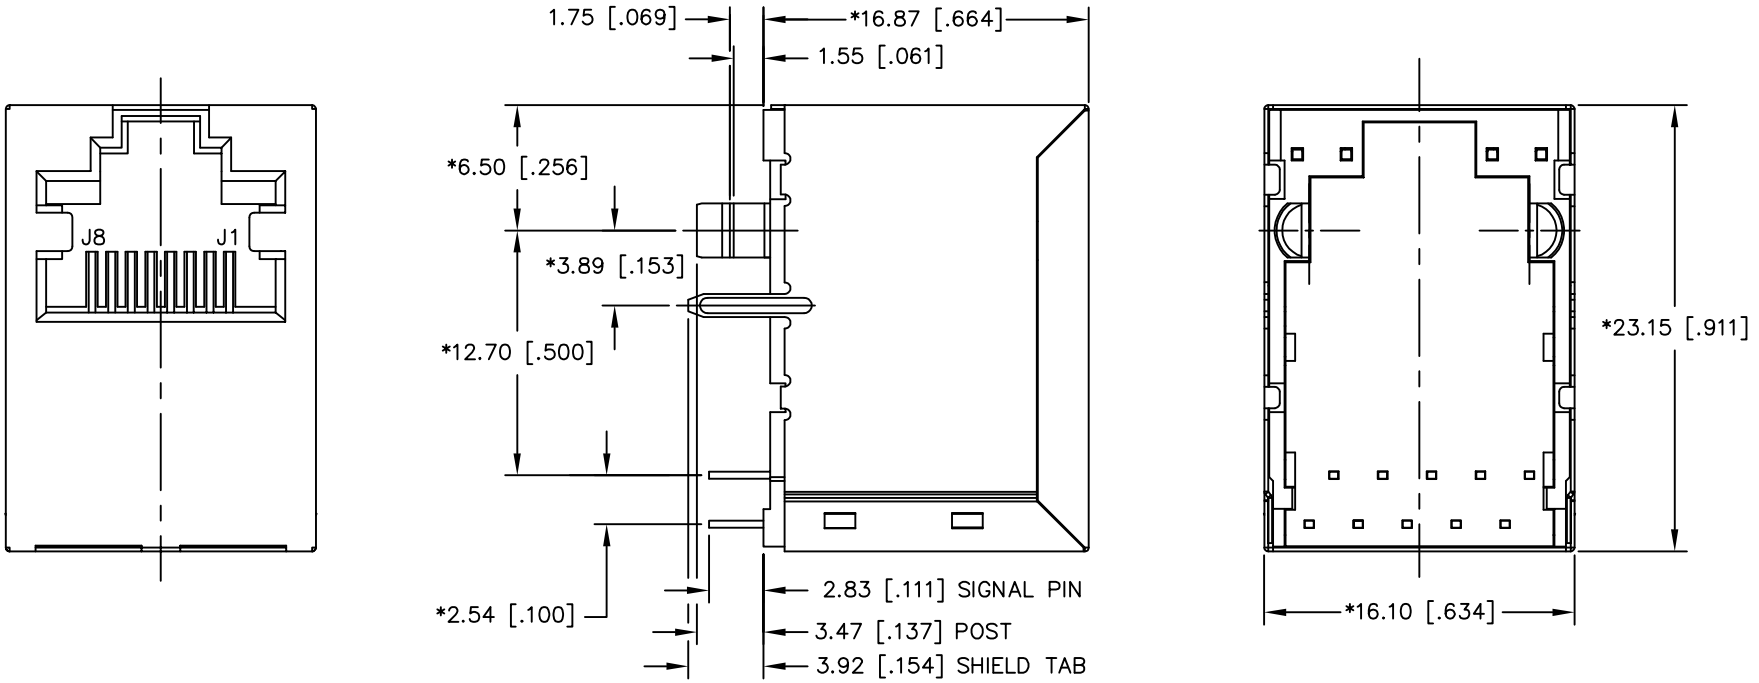


DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.25 [±.010]

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/15/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD3-0004NL-X1	–	3 OF 5	JXD3-0004NL	A

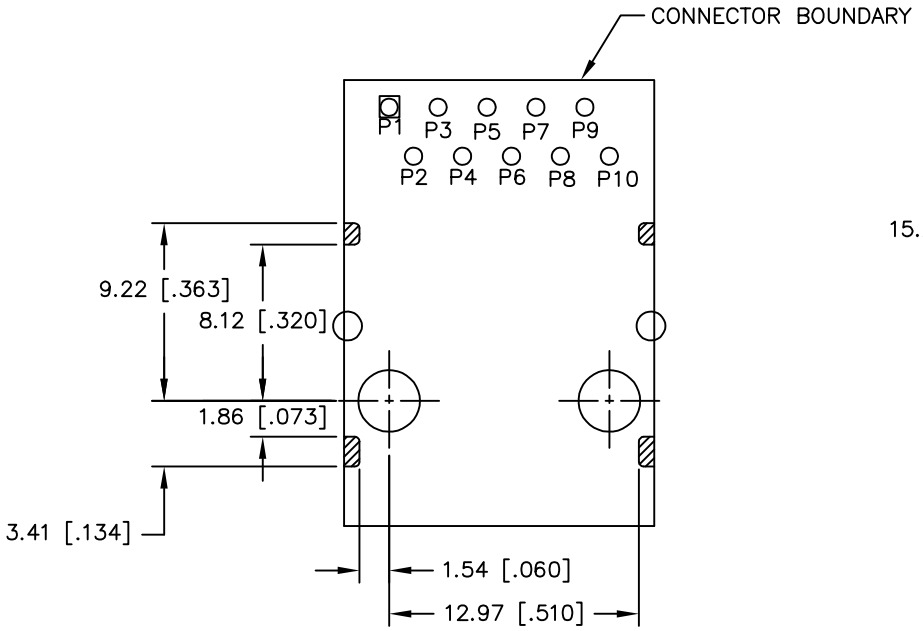

KEEP–OUT AREA (COMPONENT SIDE SHOWN)

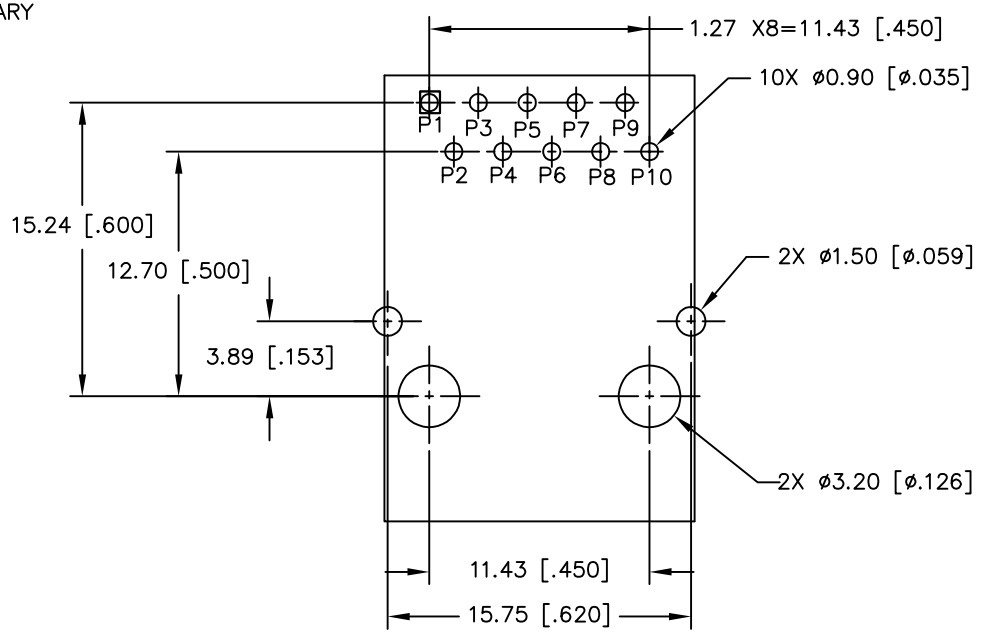


RECOMMENDED PWB LAYOUT
(COMPONENT SIDE SHOWN)

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/15/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD3–0004NL–X1	–	4 OF 5	JXD3–0004NL	A

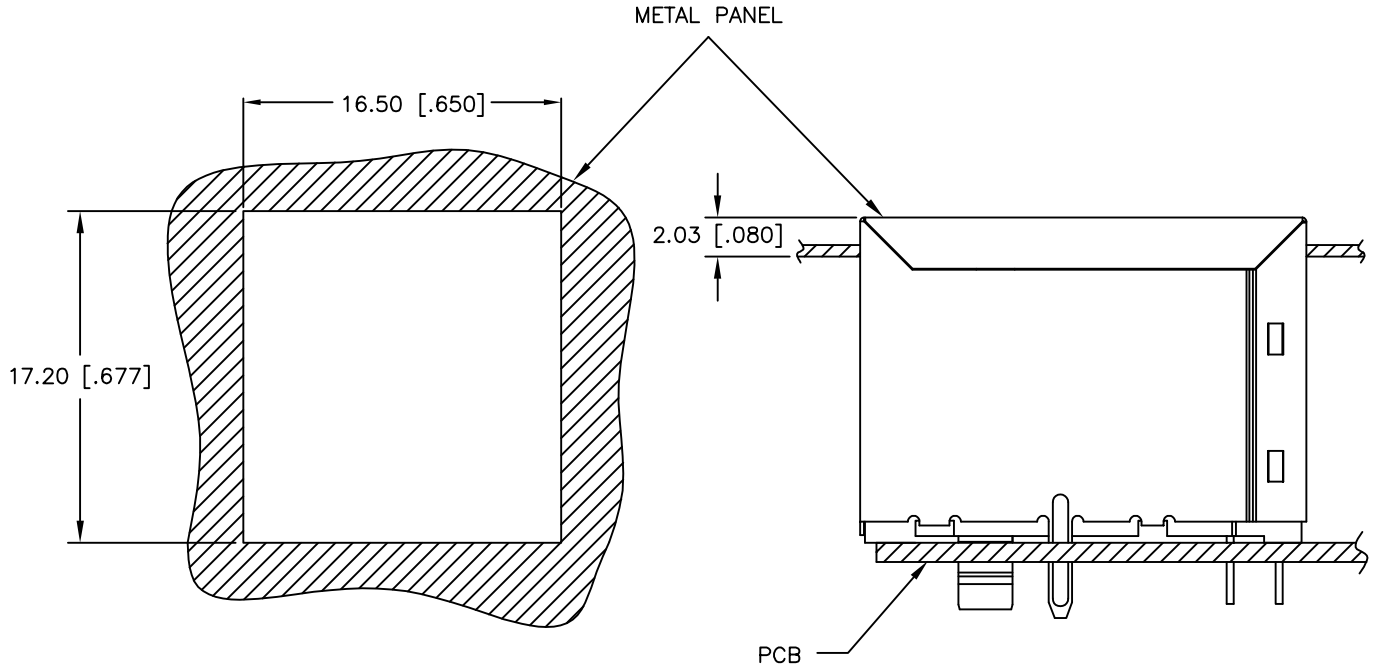

SUGGESTED PANEL CUTOUT

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (04/15/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,100P,1:1,TU	JXD3-0004NL-X1	–	5 OF 5	JXD3-0004NL	A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

PA2744NL PG2290.151HLT ANT1204F007R0870A PE-68386NLT W1902 W3078 W3334B0150 BSPQ000603041N4B00 PA4343.451NLT PAT6261.003NLT PA4320.104NLT BBUP00201209121Y00 E5J88-032-02-L JXD0-2015NL AWCS0012070736NJ00 BDHE002520122R2MQ1 PA4341.221NLT PA4341.301NLT BSPQ000603043N0B00 DPX1608LKF3R2460A PA4320.334NLT PE-67100NL PGL6395.121HLT JXD2-0Z10NL PA4343.361NLT PD380-4000S1NF PD617-6000M243 W1093 P0585NL PA0369NL