Housing - HC-STA-D07-CHPWS-1TGM20-EL-AL - 1419242

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Feed-through header D7, with single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, height: 60.5 mm, cable gland: none, support sleeve: yes, 1x M20, Standard

Key Commercial Data

Packing unit	1 pc
GTIN	4 055626 159881
GTIN	4055626159881

Technical data

Dimensions

Height	60.5 mm
Width	26.5 mm
Length	26.5 mm
Length of the assembly cutout	26.5 mm
Width of the assembly cutout	26.5 mm

Ambient conditions

Degree of protection (IP)	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12
Size	D7
Housing type	Feed-through header
Color	gray aluminum
Locking type	with single locking latch

Housing - HC-STA-D07-CHPWS-1TGM20-EL-AL - 1419242

Technical data

General

No. of cable outlets	1
Cable outlet	straight
Screw connection	none
Type of the screw connection	1x M20
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated
Seal material	NBR, conductive
Material lock	PA


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”

Drawings

Housing - HC-STA-D07-CHPWS-1TGM20-EL-AL - 1419242


Dimensional drawing

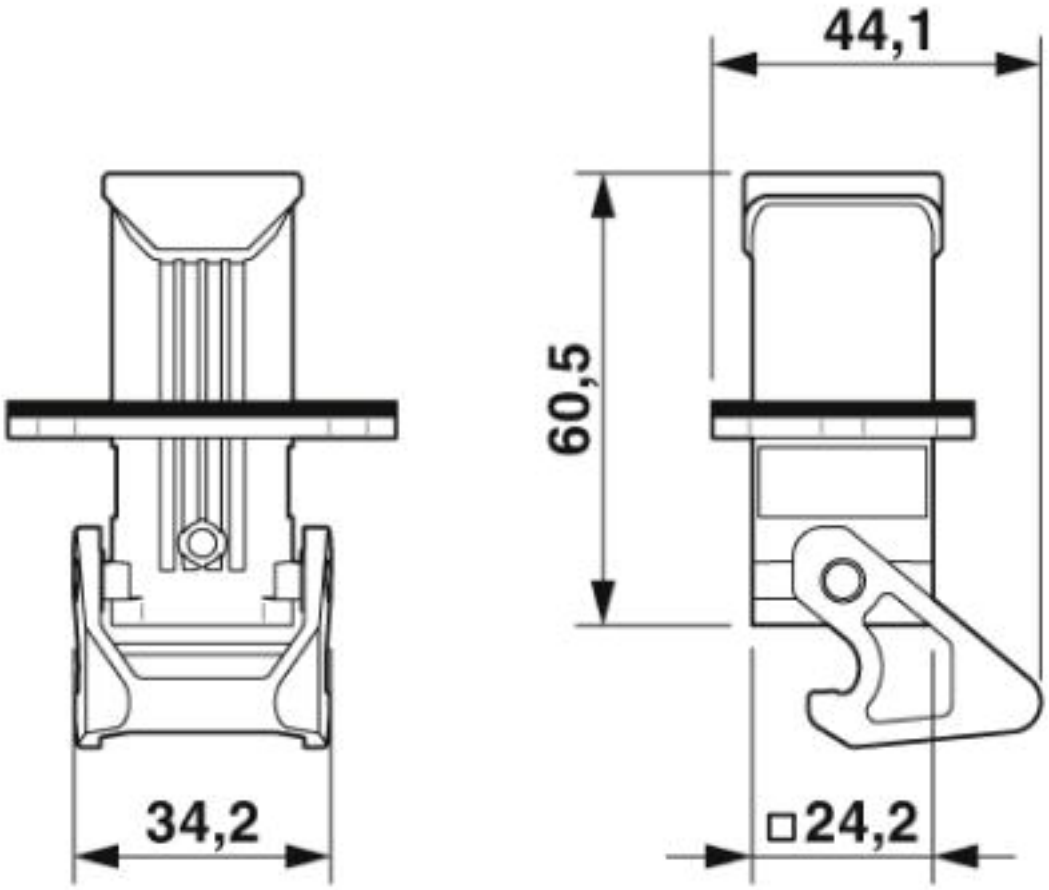

Dimensional drawing

Housing - HC-STA-D07-CHPWS-1TGM20-EL-AL - 1419242

Dimensional drawing

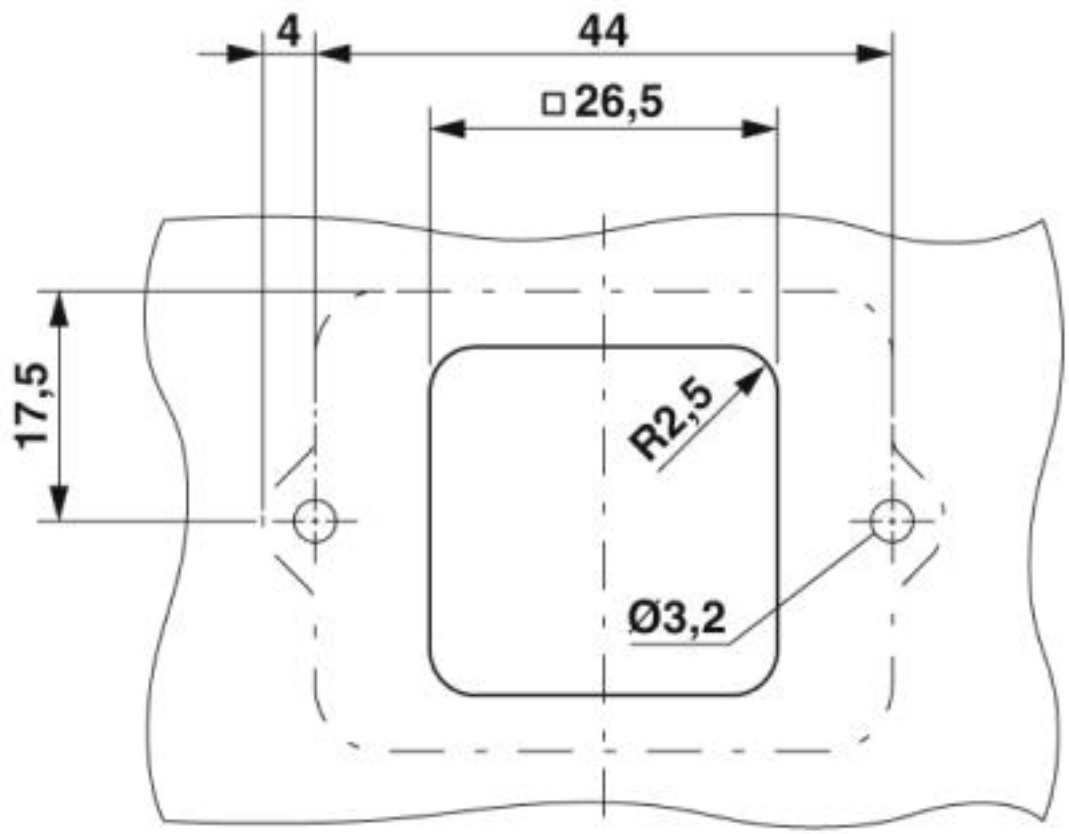

Mounting cutout

Approvals

Approvals

Approvals

EAC / UL Recognized / cUL Recognized / DNV GL / cULus Recognized

Ex Approvals

Approval details

EAC	EAC	RU C-DE.AI30.B.01102

Housing - HC-STA-D07-CHPWS-1TGM20-EL-AL - 1419242

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
DNV GL		https://approvalfinder.dnvgl.com/	TAE000037S
cULus Recognized			

Phoenix Contact 2019 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PHOENIX CONTACT:

1052015:0051 1405233 1719341 1837395 1967249 2908729 3100240 3260068 0201139 3030349
3200674 3240926 5031171 0828736 1585760 1843677 1886595 5442235 1411283 1608100 1873757
3244643 1660397 1706196 1844808 1751516 1857028 2940359 3210981 1418790