This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

1 Electrical


1.1 Impedence	50 Ω
1.2 Frequency	0~6GHz
1.3 VSWR	1.10:1

2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass,nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Bronze,Gold plated

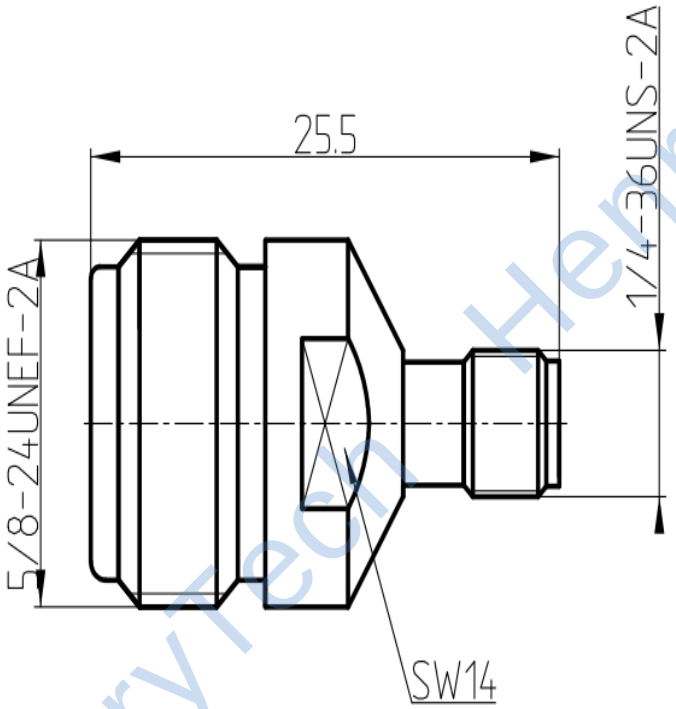

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector N Female to SMA Female Adaptor				
ENGINEER: L. yu 19/03/17		HenryTech			
APPROVED: W. yi 19/03/17		DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°	PART NO: HL-N-SMA-KKA	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

H2SYDC-20-62HP+ H3-MAPD-008109-C30040 HL-MCX-KE-02 HL-SMB-K3DY HT-HFCN-3800+ HL-N-KKC HN-DC2016-0.5(12-4.6)M HT-LFCN-3800+ HT-QCN-19+ HT-SCA-4-10+ HG-SCN-2-22+ HG-SCN-2-65+ HL-SMA-KHD4 HT-LFCG-530+ H3-TC1-1TG2+ HL-SMA/SMB-KK HLCC2250G HX-SMA/SMP-JK H3-MABA-007871-CT1A40 H3-MABA-010551-CF1071 HN-LP7-0.5-1.27(9.4-2.8) HX-N-JK HT-BFHKI-1572+ HT-LFCG-1700+ HT-HFCN-2700+ HT-LFCN-400+ H3-MABA-011085 HL-SMAMF-2-18-15dB HL-SSMA-KHD-1 HX-1.85-JJ