
© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECN-21-107697	30JUN2021	PZ	WKH

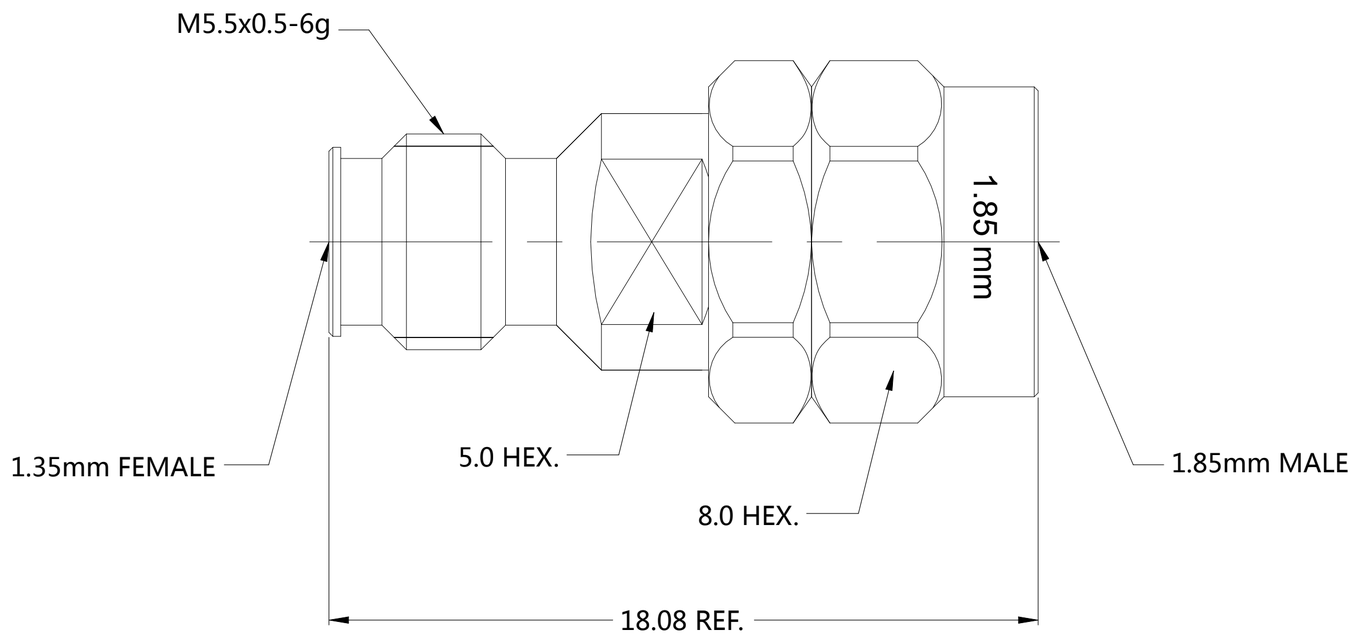

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Impedance (Ohm): 50 Frequency Range:DC to 67GHz Voltage Rating (Peak) @ Sea Level 150 V RMS Insulation Resistance (MIN.) 5000 M ohms Contact Resistance (mohms MAX) Center Contact 4.0 Outer Contact 1.0 Dielectric Withstand Voltage: 500 V RMS Max Insertion Loss : TBD VSWR: <1.33 @ DC ~ 67GHz	Interface Dimension 1.85mm male and 1.35mm female Force to Engage and Disengage Engage: N/A Disengage: N/A Center Cantact Captivation Axial (N) 26.0 MIN Radial (In/Oz) N/A Cable Retention Axial (Lbs) N/A Mating cycles 500 cycles	TEMPERATURE RANGE -40 ℃~+85 ℃ ROHS COMPLIANT

1	SHELL	STAINLESS STEEL	PASSIVATION
1	CONTACT PIN	BERYLLIUM COPPER	GOLD 50 u"/NICKEL /COPPER
1	INSULATOR	PEI	N/A
1	BODY	STAINLESS STEEL	PASSIVATION
2385341-1	PART NUMBER	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.1
4 PLC ± –
ANGLES ± 5°

MATERIAL –

FINISH –

DWN PENG ZHAI 27JAN2021
CHK ROGER SONG 27JAN2021
APVD WENKE HE 27JAN2021
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
1.35mm Female to 1.85mm Male Adapter
—

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2385341	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A

2385341

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1393431-1 3430B2F51RTDF RH73H2A40MKTN SBCHE64R7K TE50BR39J 1743455-2 CPF0402B37K4E1 1-794222-0 2310537-1 2834055-1 3-1393225-0 3631B101LL MPT100C18RF 1-962915-1 917696-1 ROX05SJ18R SBCHE154R7K 1903112-2 2-292161-3 936348-1 1969656-1 2380312-2 650075-000 SMW73R0JT 175977-2 CRGCQ2010J3K3 141991-2 2005330-1 2377783-2 U5254-000005-030PA