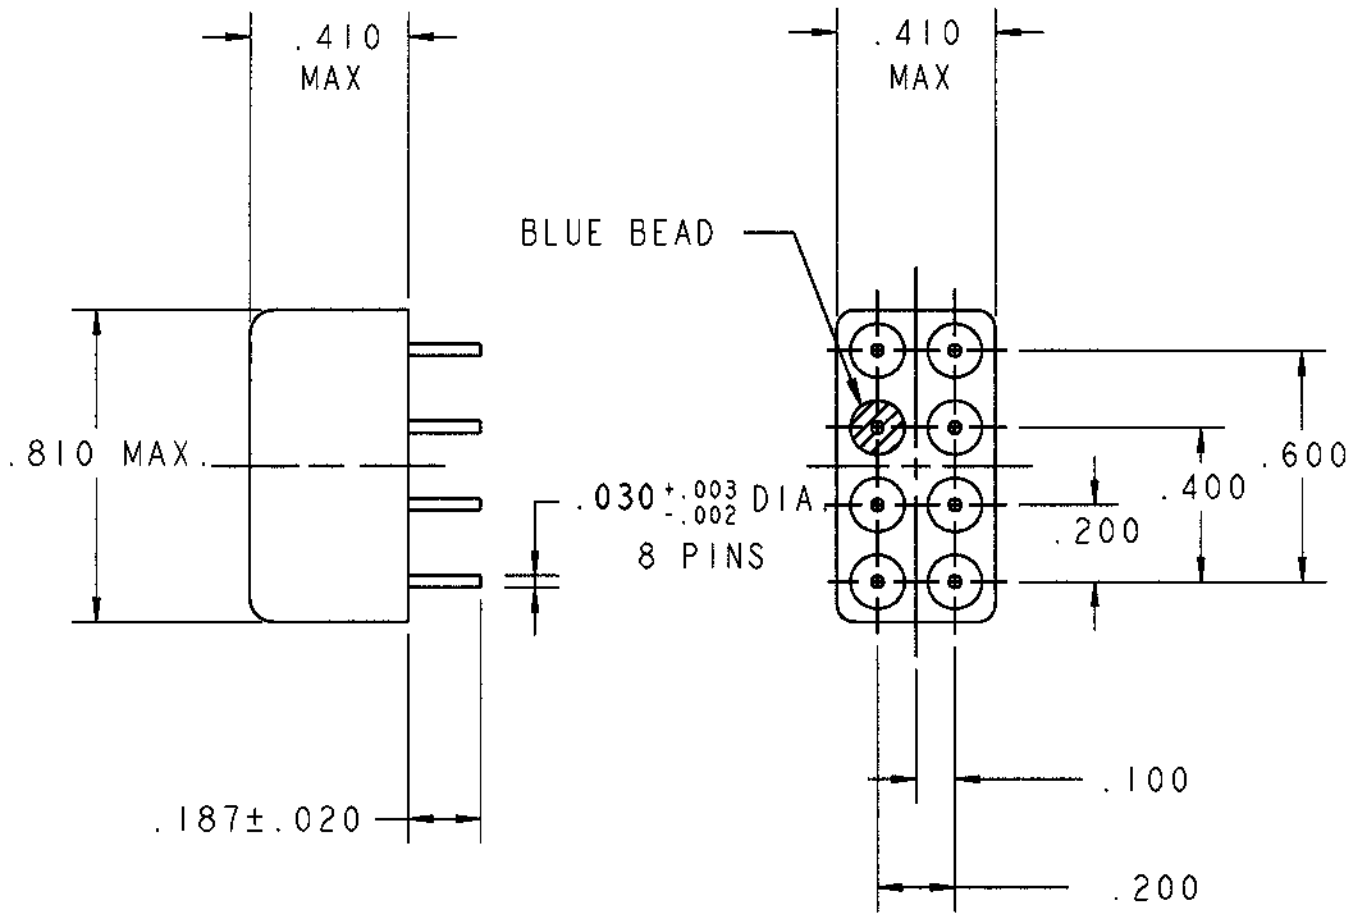


REV. 0
DCO 17259

COIL: @ 25°C


RESISTANCE	1620 OHMS ±10%
NOMINAL VOLTAGE	30.0 VDC
MUST OPERATE	14.3 VDC
MUST RELEASE	8.6 VDC MAX. 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 20 g's
SHOCK 50 g's 11 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX
RELEASE 5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC
0.1 AMP 115 VAC RESISTIVE 0.5 AMPS
28 VDC INDUCTIVE 100,000 OPERATIONS

DR. ASB 9/06/01 | CK. TLG 9-6-01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/44-053P REV.

"HMS" RELAY

HMS120IS118P

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

3-1393225-0 3430B2F51RTDF SMW73R0JT U5254-000005-030PA 2-292161-3 650075-000 936348-1
1969656-1 2005330-1 2380312-2 3631B101LL RH73H2A40MKTN 1743455-2 175977-2 CPF0402B37K4E1
1393431-1 2377783-2 TE50BR39J 1-962915-1 SBCHE154R7K 141991-2 917696-1 MPT100C18RF
2310537-1 2834055-1 CRGCQ2010J3K3 ROX05SJ18R SBCHE64R7K 1-794222-0 1903112-2