


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F2	REVISED PER ECR-21-101026	23MAR2021	SK	DZ

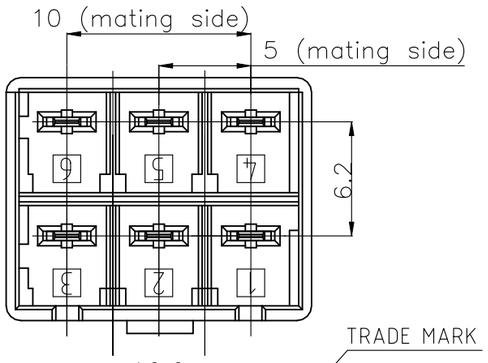

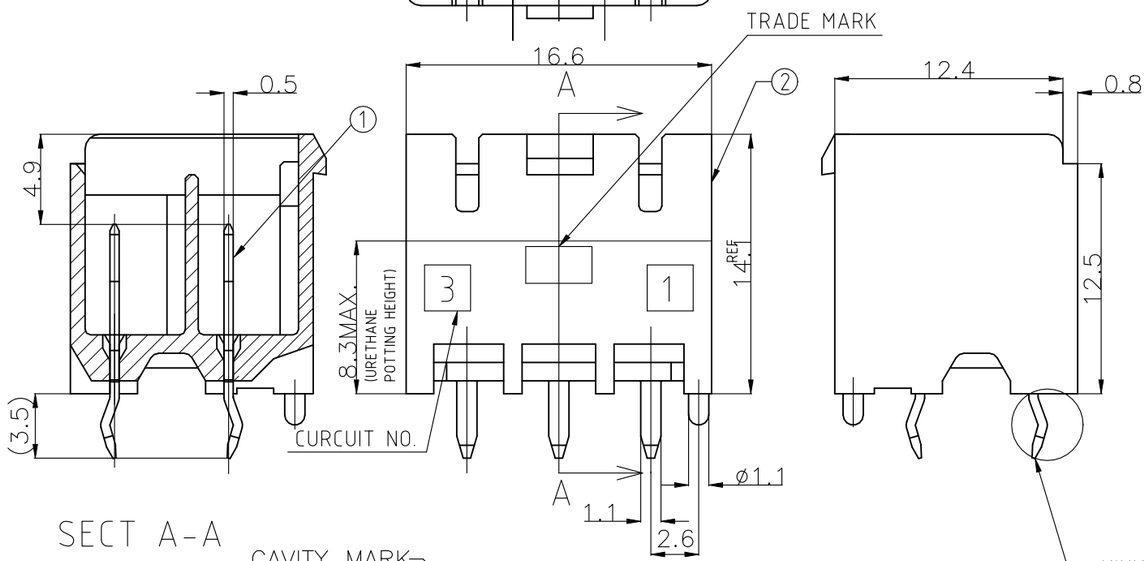

SECT A-A

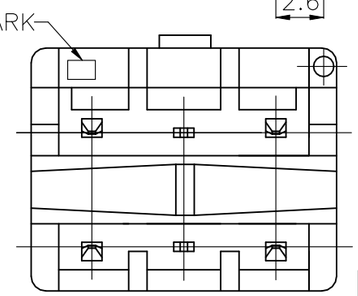

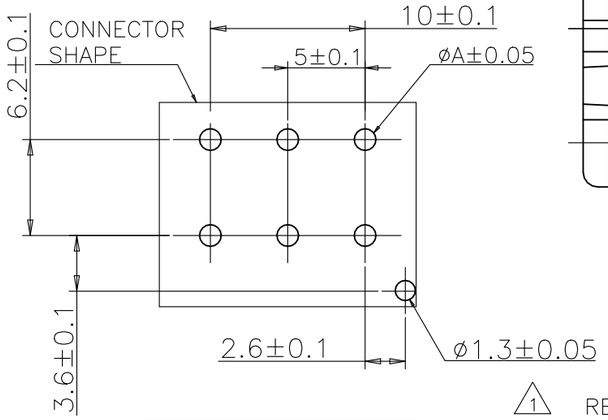


PUNCHING	1.25
DRILLING	1.4
	DIM A


RECOMMEDED PCB HOLES

1. RECOMMENDED P.C.B LAY OUT.
2. APPLICABLE P.C.B. THICKNESS:1.6.
3. MATING CONN. P/N PLUG HOUSING :SEE TABLE.
4. PARTS MEET IEC 60335-1 (GWT GLOW WIRE TEST 750 DEGREE SPEC).
5. NYLON 66, GWT, V-0.

②	HEADER HOSING	6/6 NYLON GRASS FILLED
①	TAB	COPPER ALLOY TIN PLATED
NO.	NAME	MATERIAL

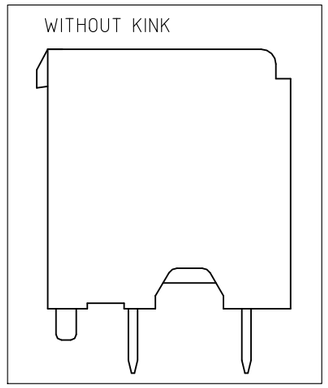

THE TYPE OF KEYING

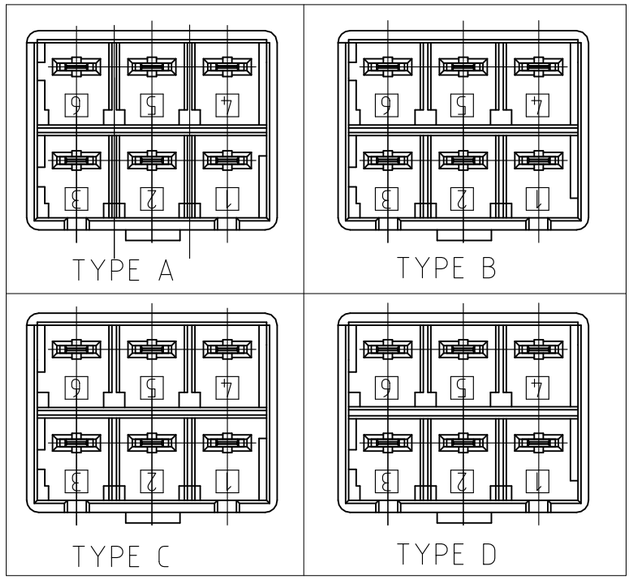

	MATING CONN. P/N	WITH/WITHOUT KINK	TYPE OF KEYING	Color	Pos	PART NO.
5	3-1376393-4	WITHOUT KINK	TYPE D	YELLOW	6Pos	8-1376387-4
5	2-1376393-3	WITHOUT KINK	TYPE C	BLUE	6Pos	7-1376387-3
5	1-1376393-2	WITHOUT KINK	TYPE B	RED	6Pos	6-1376387-2
5	1376393-1	WITHOUT KINK	TYPE A	NATURAL	6Pos	5-1376387-1
5	3-1376393-4	WITH KINK	TYPE D	YELLOW	6Pos	3-1376387-4
5	2-1376393-3	WITH KINK	TYPE C	BLUE	6Pos	2-1376387-3
5	1-1376393-2	WITH KINK	TYPE B	RED	6Pos	1-1376387-2
5	1376393-1	WITH KINK	TYPE A	NATURAL	6Pos	1376387-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.2
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ± 1°

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	20MAR2003 A.OISHI
CHK	28AUG'00 Y.KASHIWA
APVD	28AUG'00 Y.KASHIWA
PRODUCT SPEC	108-5699
APPLICATION SPEC	114-5292
WEIGHT	

TE Connectivity

NAME: 5.0 POWER KEY CONNECTOR 6P HEADER ASSEMBLY (2ROW)


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1376387	—


CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 2 | REV F2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

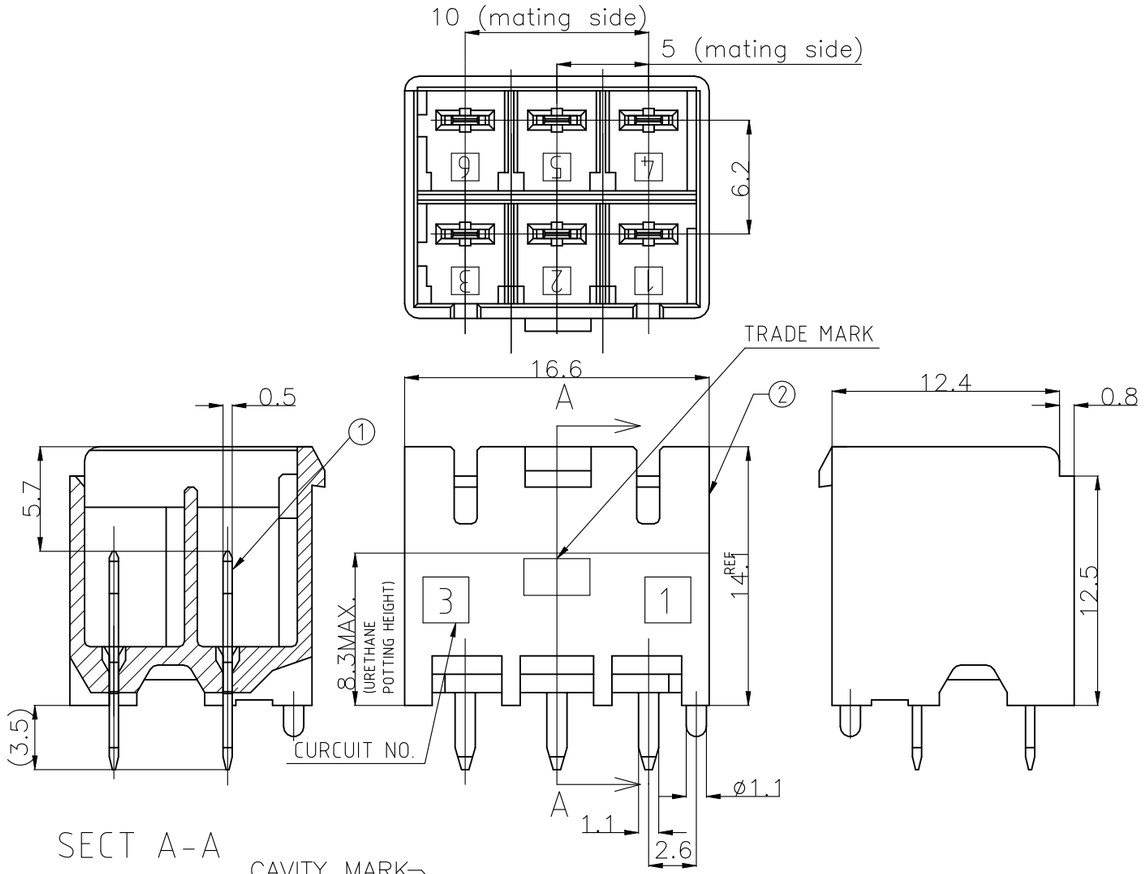

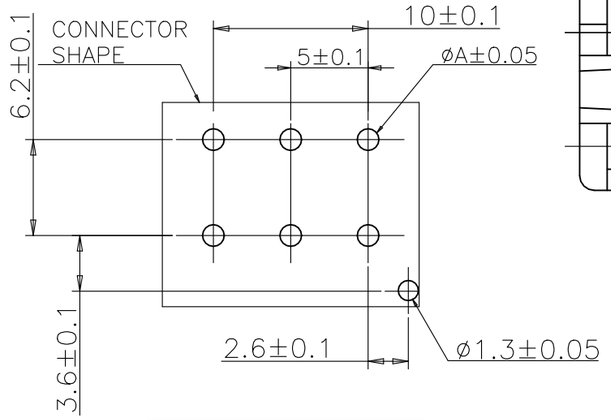

THE TYPE OF KEYING

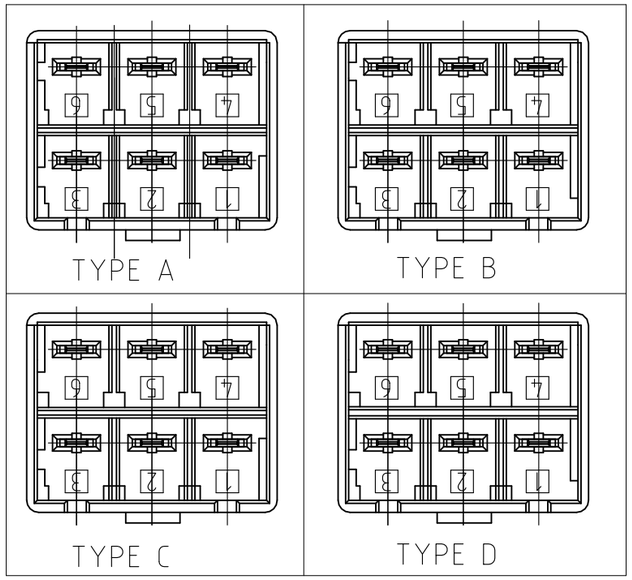

②	HEADER HOSING	6/6 NYLON W/O GF
①	TAB	COPPER ALLOY TIN PLATED
NO.	NAME	MATERIAL

PUNCHING	1.25
DRILLING	1.4
	DIM A

RECOMMEDED PCB HOLES

1. RECOMMENDED P.C.B LAY OUT.
2. APPLICABLE P.C.B. THICKNESS:1.6.
3. MATING CONN. P/N PLUG HOUSING :SEE TABLE.

MATING CONN. P/N	WITH/WITHOUT KINK	TYPE OF KEYING	Color	Pos	PART NO.
3-1376393-5	WITHOUT KINK	TYPE D	YELLOW	6Pos	3-1376387-5
2-1376393-4	WITHOUT KINK	TYPE C	BLUE	6Pos	2-1376387-4
1-1376393-3	WITHOUT KINK	TYPE B	RED	6Pos	1-1376387-3
1376393-2	WITHOUT KINK	TYPE A	NATURAL	6Pos	1376387-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.2
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ± 1°

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN A.OISHI 20MAR2003
CHK Y.KASHIWA 28AUG'00
APVD Y.KASHIWA 28AUG'00
PRODUCT SPEC 108-78863
APPLICATION SPEC 114-5292
WEIGHT 1.67g

TE Connectivity

NAME
5.0 POWER KEY CONNECTOR
6P HEADER ASSEMBLY
(2ROW)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1376387	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 2 OF 2 | REV F2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-292161-3 3-1393225-0 RH73H2A40MKTN SBCHE154R7K U5254-000005-030PA CRGCQ2010J3K3 SBCHE64R7K 1-794222-0 1-962915-1 1903112-2 936348-1 2377783-2 1393431-1 650075-000 CPF0402B37K4E1 MPT100C18RF 2005330-1 2834055-1 TE50BR39J 141991-2 175977-2 3430B2F51RTDF 3631B101LL ROX05SJ18R SMW73R0JT 2380312-2 1969656-1 2310537-1 917696-1 1743455-2