
TSI SPECIFICATION SHEET
CABLE, RADIO FREQUENCY, TWIN CONDUCTOR, BALANCED LINE
TWC-78-2
MARK: TROMPETER ELECTRONICS TWINAX, TWC-78-2 E***** AWM STYLE 2092 (*)

*(VENDOR 4 DIGIT NUMBER TO BE ASSIGNED BY TEI PURCHASING DEPT.)

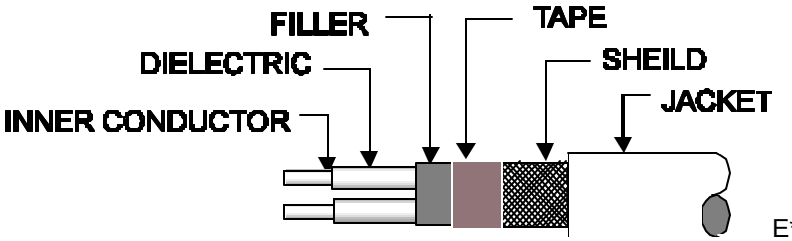

E*****:MANUFACTURER'S UL FILE NUMBER.

REQUIREMENTS:

1. IMPEDENCE (OF PAIR) ---------- 78 ± 3 OHMS
2. OPERATING VOLTAGE ---------- 1 KVRMS MAX/2 KVDC
3. BEND RADIUS ---------- 1.25 INCH MIN
4. CAPACITANCE ---------- COND TO COND ---------- 21.2 PF/FT
   COND TO SHIELD ---------- 36.0 PF/FT
   COND TO SHIELD TO COND---- 38.0 PF/FT
   TWO COND TO SHIELD ---------- 62.0 PF/FT
5. CONDUCTOR LOOP RESISTANCE ---------- 20.0 OHMS/M FT MAX
6. VELOCITY OF PROPAGATION ---------- 66% NOM
7. ATTENTUATION:

FREQUENCY	dB/100 FT NOM	FREQUENCY	dB/100 FT NOM
1 MHz	0.70	40 MHz	4.50
3 MHz	1.10	50 MHz	5.10
4 MHz	1.40	100 MHz	7.50
5 MHz	1.55	200 MHz	10.50
7 MHz	1.80	500 MHz	16.00
10 MHz	2.20	700 MHz	18.60
20 MHz	3.10	1000 MHz	22.50
30 MHz	3.90		

8. HEAT AGING ATTENUATION TEST: SUBJECT A 180 FOOT SAMPLE TO 80°C IN AIR CIRCULATING OVEN FOR 72 HRS. REMOVE CABLE FROM THE OVEN AND LET STABILIZE TO ROOM TEMP (4 HRS MIN). THE ATTENTUATION AT 7 MHz SHALL NOT INCREASE MORE THAN .48 dB/100 FT FROM ITS UNAGED VALUE
9. WEIGHT ---------- .0353 LB/ FT
10. INSULATION RESISTANCE (MIN) ---------- 20 MEGOHMS/1000 FT
11. OPERATING TEMPERATURE RANGE ---------- -40° C TO +80° C

DESCRIPTION	CONSTRUCTIONAL DETAILS
INNER CONDUCTORS	TWO CONDUCTORS, EACH 7 STRANDS OF AWG SIZE 28 TINNED COPPER WIRE. NOM DIA .037 (AWG 20)
DIELECTRICS	TWO EACH POLYETHYLENE, ONE BLUE, ONE NATURAL. NOM DIA .076
FILLERS	TWO EACH POLYETHYLENE. NOM DIA .052
CABLE CORE	.154 NOM O.D., .160 MAX DIELECTRICS AND FILLERS TO HAVE A 2.92 ± .25 RIGHT-HAND OR LEFT-HAND LAY, 4 TWISTS PER FOOT. A NYLON THREAD WRAP SHALL BE APPLIED WITH SUFFICIENT COVERAGE TO MAINTAIN THE POSITION OF THE COMPONENTS
SHIELD	SINGLE BRAID, (128 STRANDS 16X8) AWG SIZE 36 TINNED COPPER WIRE. 9.8 PICKS/IN, 32° BRAID ANGLE, 4.2 OHM/M FT D.C. RESISTANCE. SHIELD COVERAGE 93% NOM, MAX O.D. .195
JACKET	BLUE (PER EIA-359-A, MUNSELL COLOR CHART, SYMBOL CENTROID) POLYVINYLCHLORIDE .242 ± .005 O.D.

DATE | APPR | DWN DKC | EO 12578 | REV J

TSI	DWN	DKC	10-6-98	MATERIAL	CODE IDENT	DRAWING NO.	REV
	CHK	D. CORNMAN	11-24-04	———	14949	TWC-78-2	J
	ENG	R. THIELE	11-24-04				
	APPR	T. CLARE	11-24-04	SCALE --------	DATE 9-27-76	SHEET	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

CN1021A14G03P8-040 145-0701-821 30-9516 415-0028-048 DD2466134 DEUH-9P
CN0967C10A20P6-040 12-141 142-0403-011 145-0693-002 415-0536-012 8-141 30-9506-88
415-0043-MM250 CJ70-7 M24308/4-5F M49142/03-0005 40-9715HM 131-3701-306 21-14-M5.0
40-98443N-C ATT-0263-04-SMA-02 108-0913-001 415-0030-MM150 415-0203-024 111-0102-001
135-3402-001 147-0701-241 147-0701-832 C0909A18-11PN-106