


EC No.

Toggle Switches

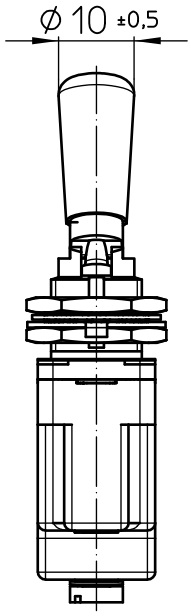


Keyway Opposite keyway

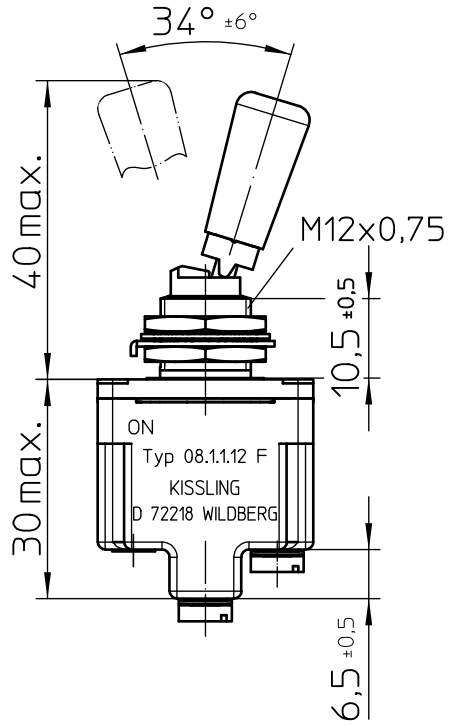

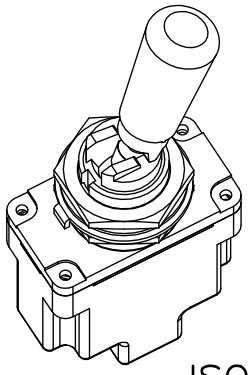


ISO




Mounting Detail

with locking ring



without locking ring



Third Angle Projection

	Date	Name
Drawn	12.03.2002	Kulli
Check	03.11.2005	Braun

mm

Scale 1:1



General Tolerances
DIN ISO 2768 mK

Elektrotechnik - GmbH & Co KG
D - 72218 Wildberg

Drawing No: 08-1-1-12 F

NSN.:

Circuit Diagram

	Circuitry made with toggle at keyway	Circuitry made with toggle at opposite keyway
Pole 1		

Actuation

momentary keyway side
locking opposite keyway side

Locking Configuration

locked out keyway side
locked in opposite keyway side

Construction

Material, Casing ..... Duroplast GF
Material, Cover GD-ZnAl4Cu1
Connections ..... Screws M3,5x6 ISO 1580
Protection Interior ..... IP 6K7 DIN 40 050 Part 9
Connections ..... IP 00 DIN 40 050 Part 9

Mechanical Data

Current carrying parts ..... CuZn-Alloy
Contacts ..... Ag
Ambient Temperature Range ..... -55°C to +85°C
Storage Temperature Range ..... -65°C to +85°C
Life Cycle iaw VG 95 210 Part 21, grade H .....100.000 operations

Electrical Data

Voltage 28 V DC ohmic Load 15A
28 V DC inductive Load ..... at L/R = 5 ms 10A
28 V DC lamp Load 4A
115 V AC ohmic Load 15A
115 V AC inductive Load ..... cos. φ = 0,75, 7A
115 V AC lamp Load 2A
Motor Load ..... utilisation category AC3 (see DIN VDE 0660 Part 107) 5A

Min. Rating ..... 12 V DC, 20 mA

It is recommended to use gold-plated contacts
for lower currents or voltages.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-520128-2 SMV3W5M6JT SMW73R0JT 1-1743284-2 1969656-1 917790-2 1488167-1 281990-2
292230-8 3-1393225-0 36161 1393431-1 1743455-2 2834055-1 1-794222-0 2-520103-2
CRGCQ0805F150R CRGCQ2010J3K3 936348-1 2-292161-3 2-32562-2 352116RFT 35402K7FT 640174-1
650075-000 917696-1 141991-2 1MM-HU-D10-VS-00-F-TBP 3430B2F51RTDF 2377783-2