

AP3508 SERIES

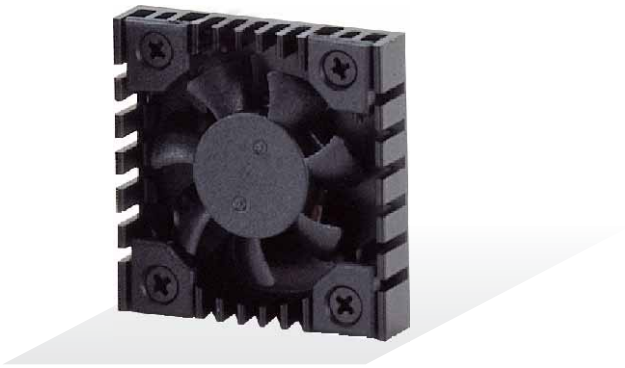

External Dimensions

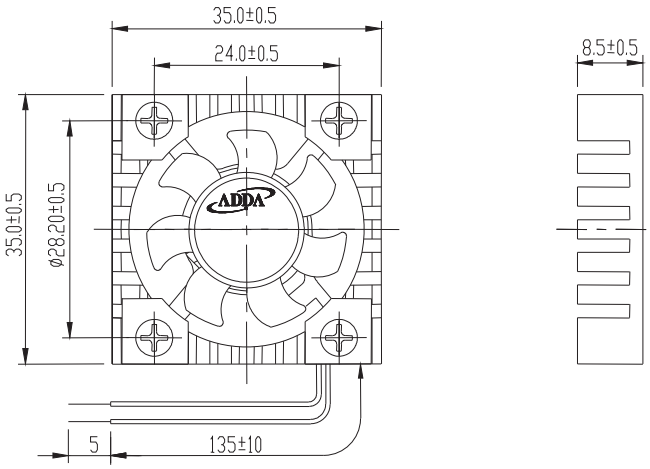

Frame:Aluminum alloy
Impeller:Plastic(UL:94V-0)
Lead wire:UL1571AWG28

Specifications(Nominal)

*:Noise is measured at the distance of one (1)meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
35x35x08	AP3505LX-J70(TX)	●	5	0.07	0.35	7500	0.071	2.40	0.082	2.05	25.0	12.0
	AP3505MX-J70(TX)	●	5	0.11	0.55	9000	0.093	3.30	0.138	3.45	30.0	
	AP3505HX-J70(TX)	●	5	0.13	0.65	10500	0.116	4.10	0.151	3.78	33.5	
	AP3512MX-J70(TX)	●	12	0.06	0.72	9000	0.093	3.30	0.138	3.45	30.0	
	AP3512HX-J70(TX)	●	12	0.09	1.08	10500	0.116	4.10	0.151	3.78	33.5	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓										

*Safety approvals

✓	✓		✓	✓

©COPYRIGHT 2008 ADDA CORPORATION.ALL RIGHTS RESERVED. ADDA CORPORATION AND ADDA CORPORATION LOGO ARE TRADEMARKS OR SERVICE MARKS OF ADDA CORPORATION.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ADDA:

AS12024MB25A100 AA1281MB-AT AA1751HB-AW AA1752HB-AW AD0412HB-C50 AD0424HB-G70 FG120-W5 AD5012HB-C71 AD0912UB-A70GL AD0805HB-D71 AK1752HB-AT AK1862HB-AT AK2582HB-AT AP0512HX-J90 AD0405LB-G70(T1) AD1212HB-F51 AK2581MB-AW AD1312HB-F51 AD5012MB-C71 AD0812HB-D71 AD1212UB-F51 AD1224HB-F51 AD0912UB-A71GL-LF AK2581HB-AW AD0205MX-K50(TX) AD1224DB-Y51 AK1782HB-AT AD0412MB-G70(T1) AD0424MB-G70 AD0824VB-A71GP