


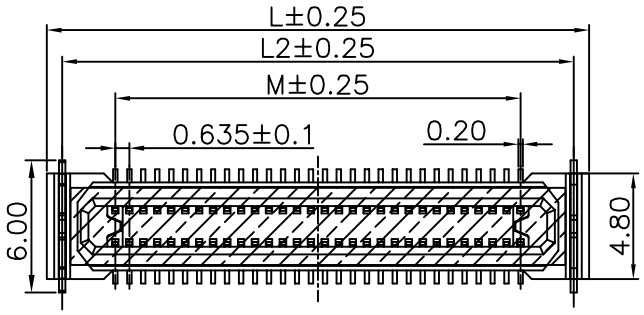


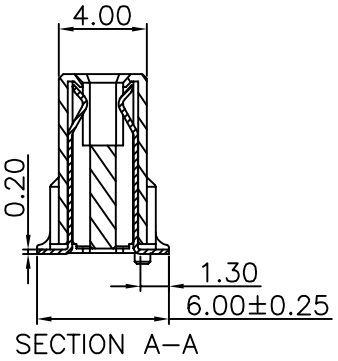


Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:100mΩMax.
Operating Temperature:–40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V–0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

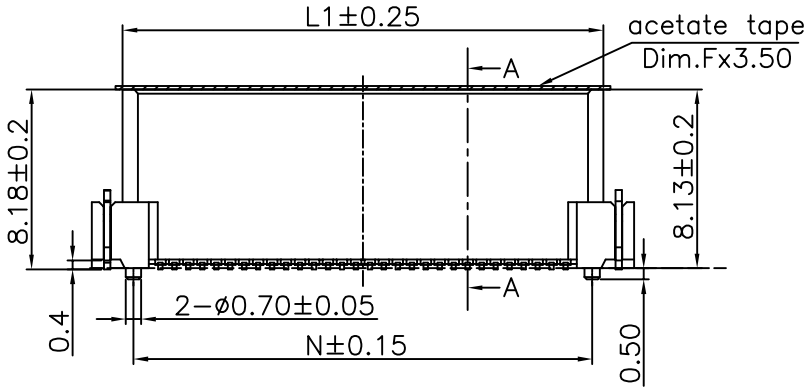





No. of PIN/ROW	Dimension Information					
	L	L2	M	L1	N	F
2x30	24.65	23.25	18.42	21.85	20.80	22.50
2x40	31.00	29.60	24.77	28.20	27.15	28.80

Recommended P.C.Board Layout
(Tolerance:±0.05)

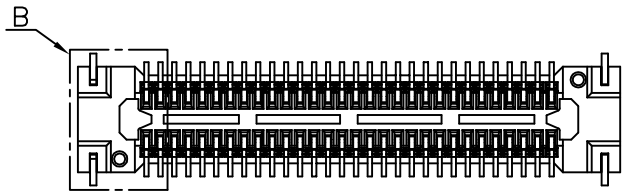

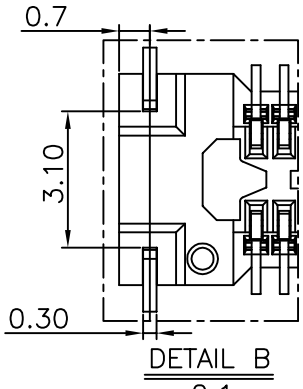

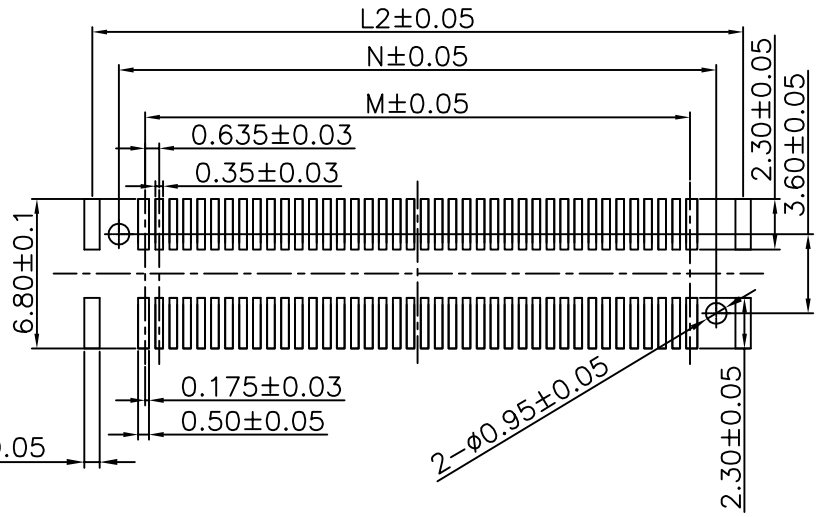

Ordering Information

C GZC202 – XX XX B 001 C 1 A X

- XX: No. Of Pins Per Row — 30,40
- XX: Standard Plating — 02=Gold Flash; 09/N5=Au plating
- 1: Color — 1=Black
- X: Standard Packing — H=Acetate tape +Tape&Reel

Greenconn Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:
		X.°±5.0°	X.±0.30		
		.X°±3.0°	.X±0.25	CHECKED:	DATE:
		.XX°±2.0°	.XX±0.15		
		.XXX°±1.0°	.XXX±0.10	APPROVED:	DATE:

REV.	UNIT.	SCALE.	PAGE.
B	mm	3:1	1/1

DWG. NO. CGZC202–CB1CA
PART NO. CGZC202–XXXXB001C1AX
TITLE. 0.635mm PITCH BTB FLOATING CONNECTOR

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GREENCONN:

CBEC201-4079B001C1AF CBED201-3479B001C1AD CBEC219-3479B001C1AF CBED201-2579B001C1AD
GBED202-3479B001C1AD GPEC208-0502A085C1BC CBEC201-3479B001C1AF CBED201-4079B001C1AD
GBEC202-4079B001C1AF GBEC208-4005B001C1AF GBED202-4079B001C1AD GPCD101-0402A003C1AH
CBEC201-1379B001C1AF CBEC201-2579B001C1AF CBEC220-4079B001C1AF