
SPECIFICATIONS

(RoHS Compliant)

Model Number: CLE3L2 Version: 02

Part Number: 19020190A Aug 07, 2018

Mechanical Drawing:

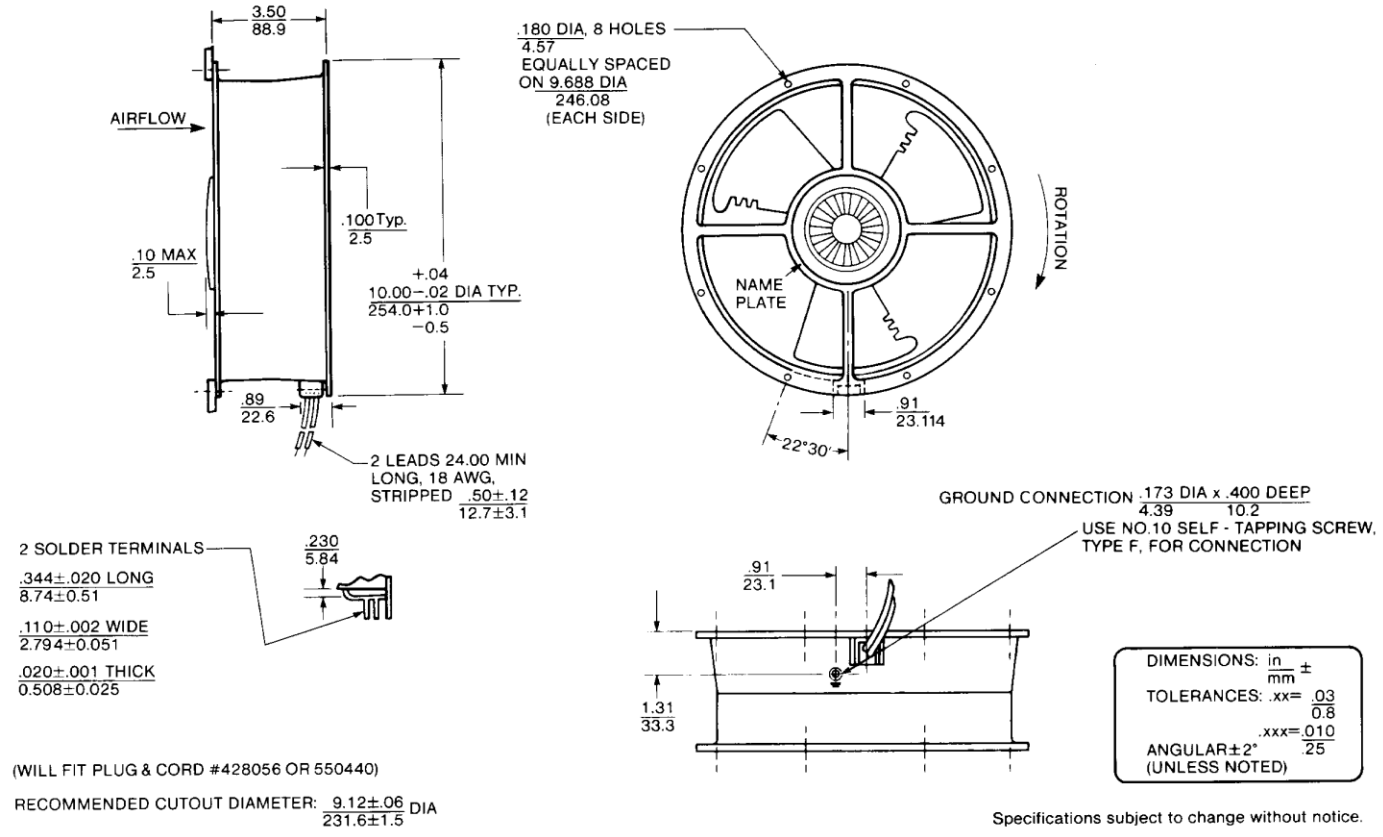

Motor:

Nominal Voltage	= 230 VAC
Frequency	= 50/60 Hz
Nominal Running Current	= 0.24 / 0.25 amps
Max. Locked Rotor Current	= 0.355 amps
Running Power	= 60/60 watts
Average Speed	= 1400/1650 RPM
Bearings	= Ball
Air Flow	= 455/550 CFM
Acoustic:	= 45.4/49.2 dBA

Construction:

Venturi: Aluminum, Black

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 46,000 hours at 70°C.

Additional Features:

Permanent Split Capacitor

Automatic Restart Thermal Protector

Class B Insulation

Operating Temperature:	-10°C to 70°C
Storage Temperature:	-40°C to 85°C


Termination:

24” Lead wires, 18 AWG, UL 1015

Agency Approvals:

UL, CUL ,CE

PQ Curve:

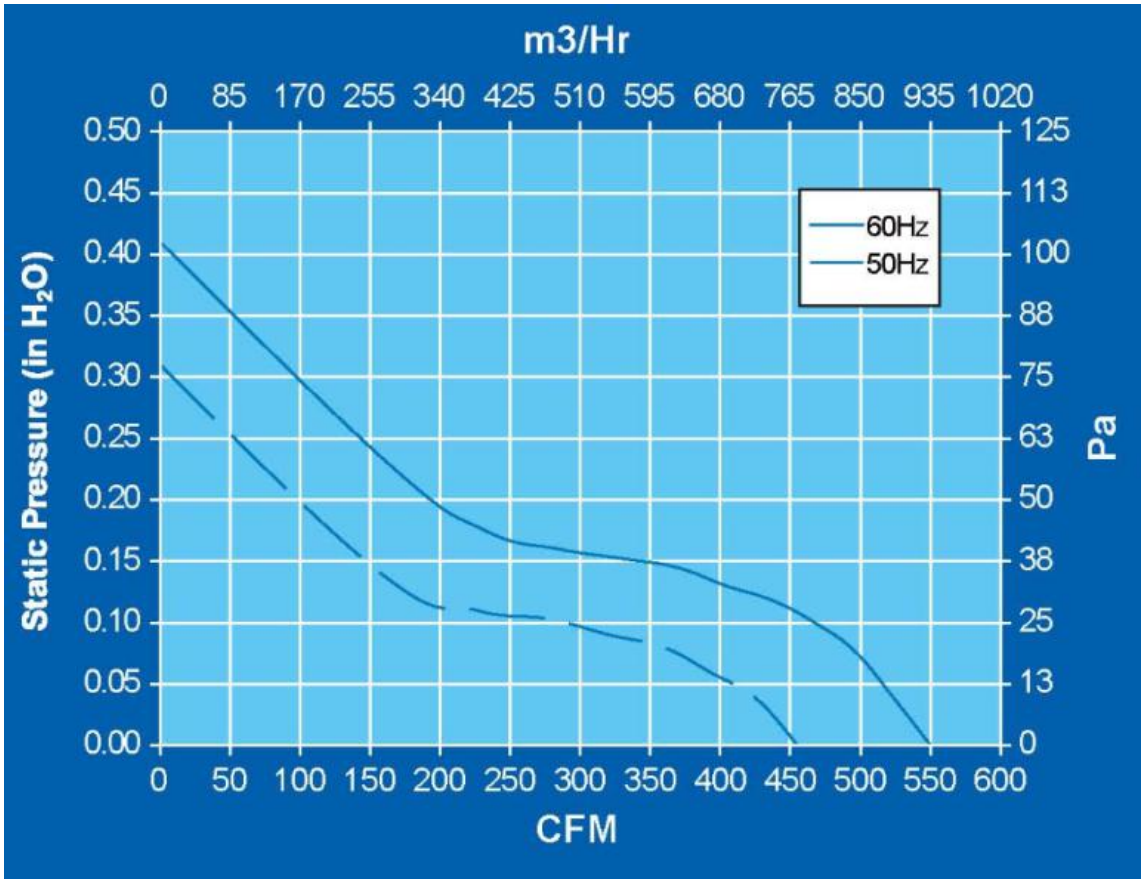
m3/Hr
0 85 170 255 340 425 510 595 680 765 850 935 1020
0.50 0.45 0.40 0.35 0.30 0.25 0.20 0.15 0.10 0.05 0.00
Static Pressure (in H2O)
125 113 100 88 75 63 50 38 25 13 0
Pa
60Hz
50Hz
0 50 100 150 200 250 300 350 400 450 500 550 600
CFM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Comair Rotron:

031081 17001219A 19039306A 19039671A 032740 19030389A GL24B7-E2 19039031A 19028933A 17001178A CLE2L2 19020188A 032620 17002001A 17002016A 476042 031176 032772 19028868A 19030616A 19039646A GDA1238-48BB 19032105A 19039299A MD24B5-E2 19039030A 039824 17002087A 19030622A 19032183A 19028885A 19031092A MA2B3 19031842A