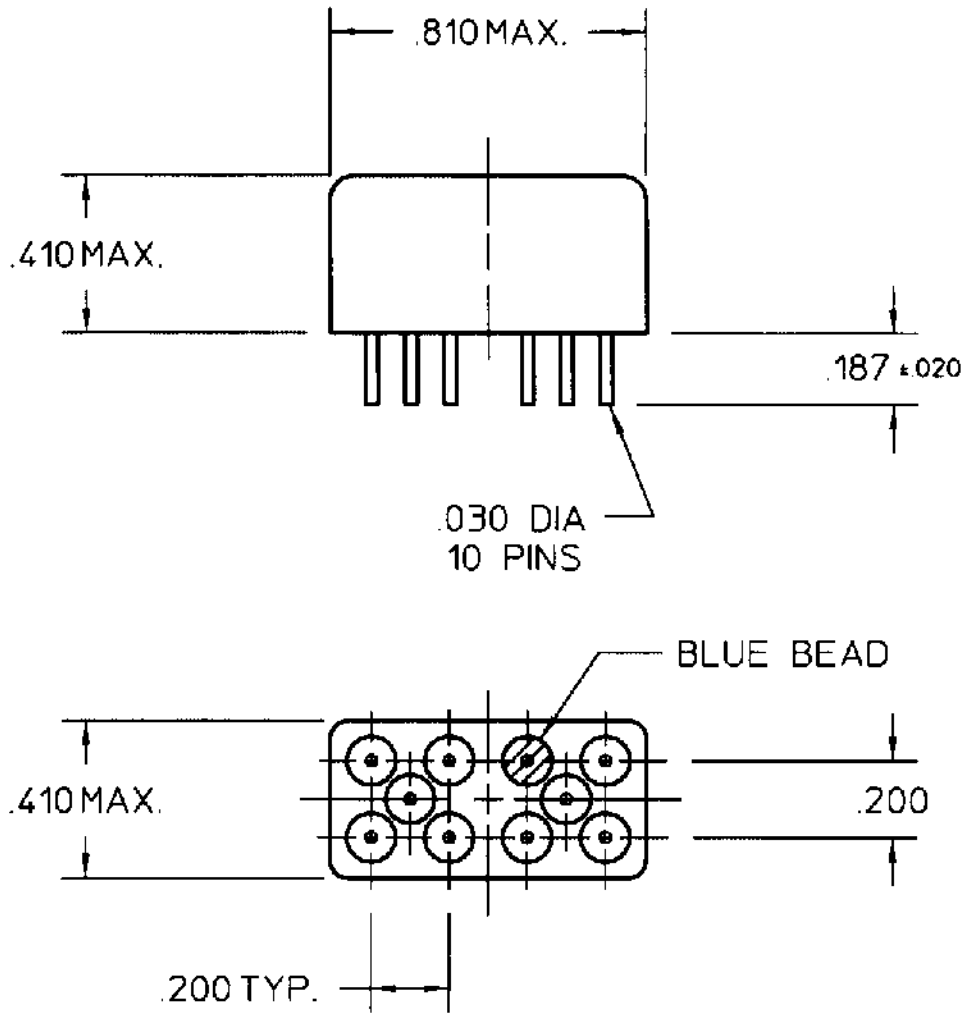


COIL: 12.0 VDC

WINDING #1	WINDING #2
254 OHMS ± 10% @ 25° C	254 OHMS ± 10% @ 25° C
6.5 VDC MUST OPERATE	6.5 VDC MUST OPERATE
12.0 VDC NOMINAL VOLTAGE	12.0 VDC NOMINAL VOLTAGE

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET & RESET TIME 5 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

CONTACTS WILL SWITCH WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN

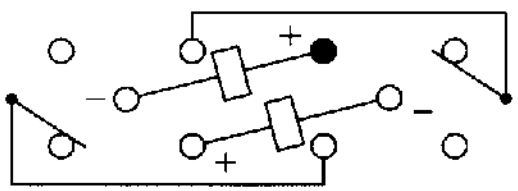

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/20/98 | CK. V2.0 98 JB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO.

TYPE "LS" RELAY

LSAW-2C-12B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2834055-1 141991-2 1903112-2 1969656-1 SBCHE64R7K U5254-000005-030PA CRGCQ2010J3K3 ROX05SJ18R 1393431-1 3-1393225-0 3430B2F51RTDF 650075-000 936348-1 RH73H2A40MKTN SMW73R0JT 1-794222-0 1-962915-1 2380312-2 175977-2 2310537-1 2377783-2 CPF0402B37K4E1 2-292161-3 2005330-1 917696-1 MPT100C18RF TE50BR39J 1743455-2 3631B101LL SBCHE154R7K