
CRYSTEK MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

RedBox SOURCE
CRBSCS-01-50.000


RoHS Compliant

Frequency:		50.000 MHz
Temperature Range:		-40°C to 85°C
Input Voltage:		+5.5 V to +15 V
Input Current:		30 mA Max
Output:		TrueSineWave
	Frequency Stability:	±25 ppm Max
	Output Power:	+5 dBm Min, +7 dBm Max
	Start-up Time:	2 ms Typical, 5 ms Max
	Load:	50 Ω
2nd Harmonic:		-25 dBc Max
Sub-Harmonics:		None
Period Jitter:	(20,000 periods)	<5 ps RMS (1-sigma) Max
Phase Jitter:	12 kHz ~ 20 MHz	<1 ps RMS (1-sigma) Max
	50 kHz ~ 80 MHz	<1 ps RMS (1-sigma) Max
Phase Noise Typical:	10 Hz	-80 dBc/Hz
	100 Hz	-115 dBc/Hz
	1 kHz	-140 dBc/Hz
	10 kHz	-155 dBc/Hz
	100 kHz	-170 dBc/Hz
	1 MHz	-170 dBc/Hz
Aging:		<3 ppm 1st year, <1 ppm every year thereafter


FRONT

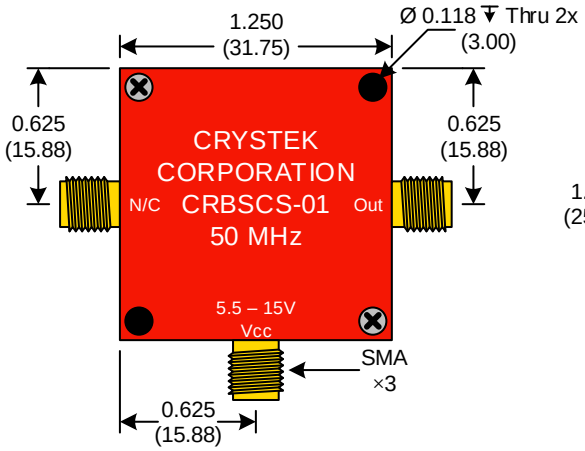

BACK

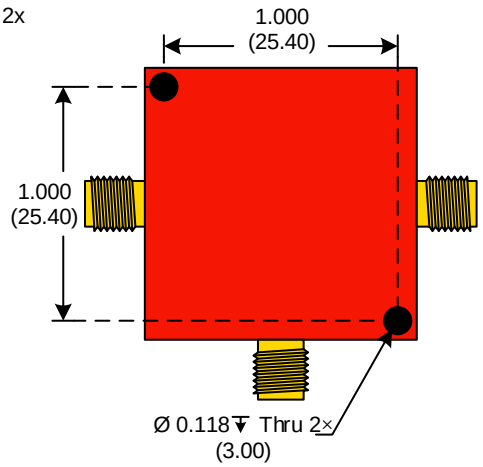

SIDE

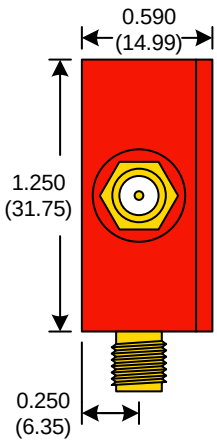

● Unless otherwise specified, Dimensions are in: IN / (mm)

Product Control:			
Crystek Part Number:	CRBSCS-01-50.000	Release Date:	13-Dec-2012
Revision Level:	A	Responsible:	C. Vales

CRYSTEK CORPORATION
12730 Commonwealth Drive • Fort Myers, Florida 33913
Phone: 239-561-3311 • 800-237-3061
Fax: 239-561-1025 • www.crystek.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CRYSTEK:

CVHD-950-76.800 CATTEN-08R0 CCSMA-MM-LL142-48 CCSMA-MM-RG174-18 CCSMA26.5-MM-086-10 CHPFL-0025-BNC CVCO55CC-2060-2130 CCSMA1-MM-RG174-36 CVCO55CC-1912-2114 CXOH20-BP-10.000 CY24AS CYS6Q31C-12.000MHZ CCSMA1-MM-RG316DS-6 CCSMA642-MM-086F-48 CCSMX-FBM-RG178-12 CE3391-25.000 CCHD-950-25-50.000 CVCO55CC-0787-0805 C3391-25.000 C3392-50.000 CCSMA-MM-RG316DS-12 CLPFL-0004-BNC CVCO55CW-0400-0800 CCSMA2-MM-RG316DS-36 CCSMA2-MM-RG174-36 17000 CCMX1-MM-RG178-6 CCSMA-MM-RG316DS-24 CCSMX-FBM-RG316-6 CVCO55CC-3205-3317