

CUSTOMER TERMINAL	RoHS	LEAD(Pb)−FREE
Sn96%, Ag4%	Yes	Yes


more than you expect

Midcom

WÜRTH ELEKTRONIK

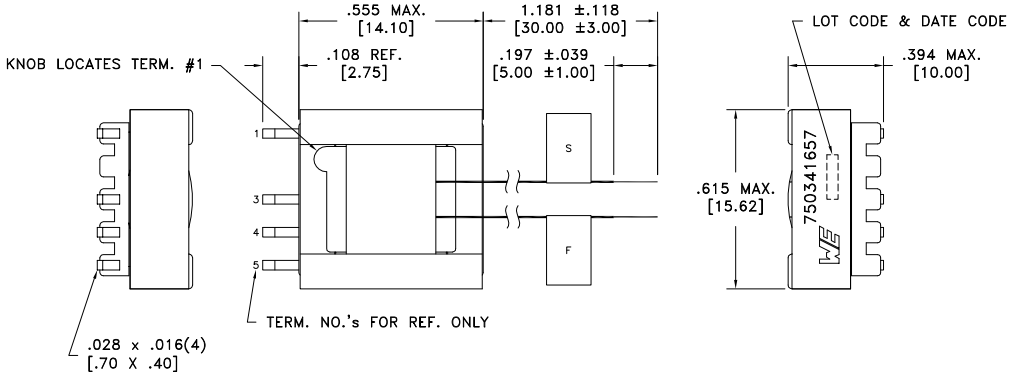





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	3−1	@20°C	2.50 ohms ±10%
D.C. RESISTANCE	5−4	@20°C	0.993 ohms ±10%
D.C. RESISTANCE	S−F	@20°C	0.057 ohms ±20%
INDUCTANCE	3−1	10kHz, 1.0VAC, Ls	0.720mH ±10%
DIELECTRIC	1−S	tie(3+4), 3000VAC, 1 second	−
TURNS RATIO		(3−1):(5−4)	2.84:1, ±2%
TURNS RATIO		(3−1):(F−S)	13.0:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: −40°C to +125°C including temp rise.

Core shorted to shield winding verified by continuity test between core and terminal #4.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tray	CONVENTION PLACEMENT	Angles: ±1° Decimals: ±.005 [.13]	**TRANSFORMER**	**750341657**
		PKG−0759		Fractions: ±1/64 Footprint: ±.001 [.03]		
		www.we−online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341657	SPECIFICATION SHEET 1 OF 1
6A	5/13	SEE REVISION SHEET FOR REVISION LEVEL			compliant RoHS	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

WURTH:

687640141002 687750225002 74408942330 810912012 860080275016 865080457015 971100477 560112110239 665102131822 744052002 140816144200 620307124022 7443633300 744393665015 830032817 686124183822 78438335033HT 810913006 560112110188 714726110106 74438334022 784773147 865230657014 64900821122 74437529203220 830003237 636201040300 64900221122 71206415 782963560