3.3Vdc HCMOS SMD Crystal Clock Oscillator



7.0 x 5.08 x 1.8 mm

ASV SERIES

ESD Sensitive

RoHS/RoHS II compliant

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- HCMOS, 3.3Vdc, 2.5Vdc, & 1.8Vdc options
- Suitable for RoHS reflow
- Seam sealed package assures high reliability
- High output drive capability (up to 50pF)

APPLICATIONS:

- Clock signaling for µProcessors, PC Motherboards & Graphic Cards

STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.312		200	MHz	
Operating Temperature		-10		+70	°C	See options
Storage Temperature		-55		+125	°C	
Overall Frequency Stability		-100		+100	ppm	See options
Supply Voltage (Vdd)		+2.97	3.3	+3.63	V	See options
Supply Current (Idd)			2.0	10.0	mA	0.312 ~ 14.9 MHz
			3.6	15.0		15.0 ~ 29.9 MHz
			5.6	20.0		30.0 ~ 39.9 MHz
			7.2	25.0		40.0 ~ 49.9 MHz
			13.3	30.0		50.0 ~ 59.9 MHz
			19.0	35.0		60.0 ~ 79.9MHz
			20.2	45.0		80.0 ~ 99.9 MHz
			23.7	50.0		100.0 ~ 125.0MHz
			27.2	65.0		125.1 ~ 165 MHz
Symmetry @ 1/2Vdd		40	50	60	%	See options
Rise and Fall Time (Tr/Tf)			3.0	5.0	ns	0.312 ~ 14.9 MHz
			2.8	4.0		15.0 ~ 29.9 MHz
			2.6	4.0		30.0 ~ 39.9 MHz
			2.4	4.0		40.0 ~ 49.9 MHz
			2.2	4.0		50.0 ~ 59.9 MHz
			2.2	4.0		60.0 ~ 79.9MHz
			2.0	4.0		80.0 ~ 99.9 MHz
			1.8	4.0		100.0 ~ 125.0MHz
			1.5	4.0		125.1 ~ 165 MHz
Output Load				15	pF	See options
Output Voltage	V_{OH}	0.9 x Vdd			V	
	V_{OL}			0.4	V	

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000| fax 949-546-8001| www.abracon.com

3.3Vdc HCMOS SMD Crystal Clock Oscillator



7.0 x 5.08 x 1.8 mm

ASV SERIES

ESD Sensitive

RoHS/RoHS II compliant

(Continued)

Parameters	Minimum	Typical	Maximum	Units	Notes
Start-up Time		0.4	4.0	ms	0.312 ~ 14.9 MHz
		0.4	4.0		15.0 ~ 29.9 MHz
		2.0	4.0		30.0 ~ 39.9 MHz
		1.5	4.0		40.0 ~ 49.9 MHz
		2.9	5.0		50.0 ~ 59.9 MHz
		1.5	5.0		60.0 ~ 79.9MHz
		1.3	5.0		80.0 ~ 99.9 MHz
		1.8	5.0		100.0 ~ 125.0MHz
		2.7	5.0		125.1 ~ 165 MHz
Tri-state function	"1" (VIH≥0.7*Vdd) or Open: Oscillation "0" (VIL<0.3*Vdd) : Hi Z				
Period Jitter One Sigma (RMS):		2.5		ps	0.312 ~ 14.9 MHz
		3.2			15.0 ~ 29.9 MHz
		3.2			30.0 ~ 39.9 MHz
		3.2			40.0 ~ 49.9 MHz
		3.2			50.0 ~ 59.9 MHz
		3.2			60.0 ~ 79.9MHz
		3.0			80.0 ~ 99.9 MHz
		2.9			100.0 ~ 125.0MHz
		2.9			125.1 ~ 165 MHz
Aging at 25°C (first year)	-5		+5	ppm	
Disable Current			10	uA	
Enable Time		3.5	5	ms	
Disable Time			100	ns	

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000| fax 949-546-8001| www.abracon.com

3.3Vdc HCMOS SMD Crystal Clock Oscillator

ASV SERIES

ESD Sensitive

RoHS/RoHS II compliant



7.0 x 5.08 x 1.8 mm

OPTIONS & PART IDENTIFICATION: (Left blank if standard)

ASV - ☐ - ☐☐☐☐☐ MHz - ☐☐☐ - ☐ - ☐

P/N and Vdd (V)
Blank: 3.3 ± 10%
25: 2.5 ± 10%
18: 1.8 ± 10%

Frequency in MHz
e.g. 0.312MHz
14.31818MHz
26.000MHz
200.000MHz

Operating Temp.
I: 0°C ~ +50°C
D: -10°C ~ +60°C
E: -20°C ~ +70°C
F: -30°C ~ +70°C
N: -30°C ~ +85°C
L: -40°C ~ +85°C

Overall Freq. Stability
J: ±20ppm
R: ±25ppm
K: ±30ppm
H: ±35ppm
C: ±50ppm

Output Load *
Blank: 15pF
50: 50pF

Symmetry
Blank: 40/60% @ 1/2 Vdd
S: 45/55% @ 1/2 Vdd

Packaging
Blank: Bulk
T: 1000pcs/Reel
T5: 500pcs/Reel

Note *: See Table below for the Output Load option availability

Output Load	Supply Voltage		
	Vdd=3.3V	Vdd=2.5V	Vdd=1.8V
15pF max	√	√	√
50pF max	√	Available for Freq. ≤ 70MHz	Not Available

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000| fax 949-546-8001| www.abracon.com

3.3Vdc HCMOS SMD Crystal Clock Oscillator




7.0 x 5.08 x 1.8 mm


ASV SERIES

ESD Sensitive

RoHS/RoHS II compliant

OUTLINE DIMENSION:

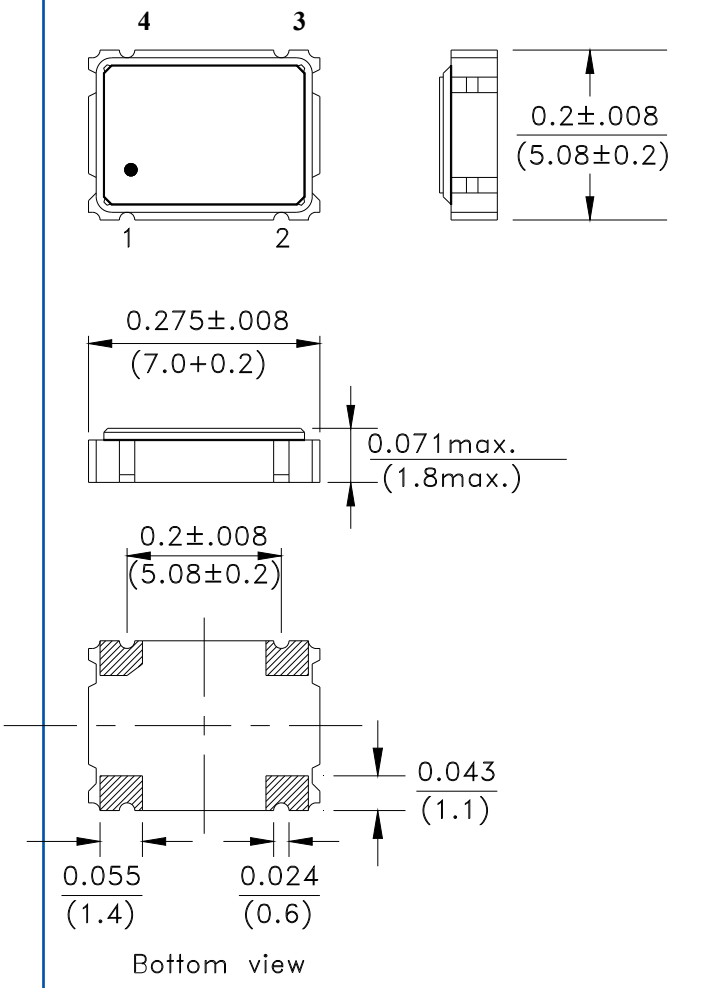

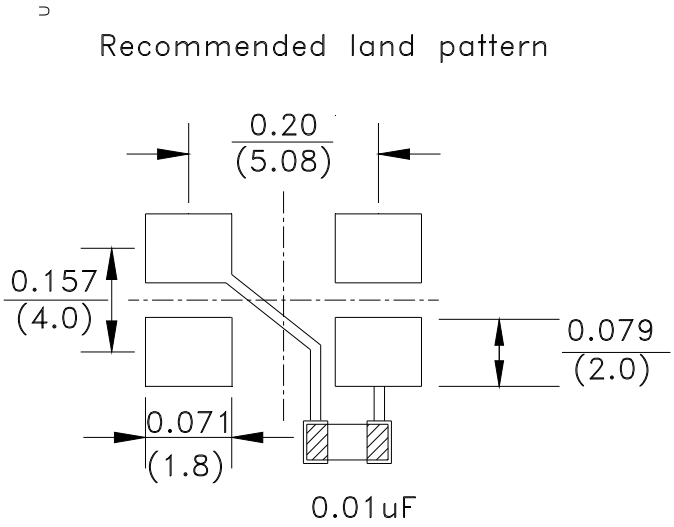

Pin	Function
1	Tri-State Enable/Disable
2	GND/Case
3	Output
4	Vdd

Dimension: Inches (mm)

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000| fax 949-546-8001| www.abracon.com

3.3Vdc HCMOS SMD Crystal Clock Oscillator

ASV SERIES


ESD Sensitive

RoHS/RoHS II compliant




7.0 x 5.08 x 1.8 mm


REFLOW PROFILE:

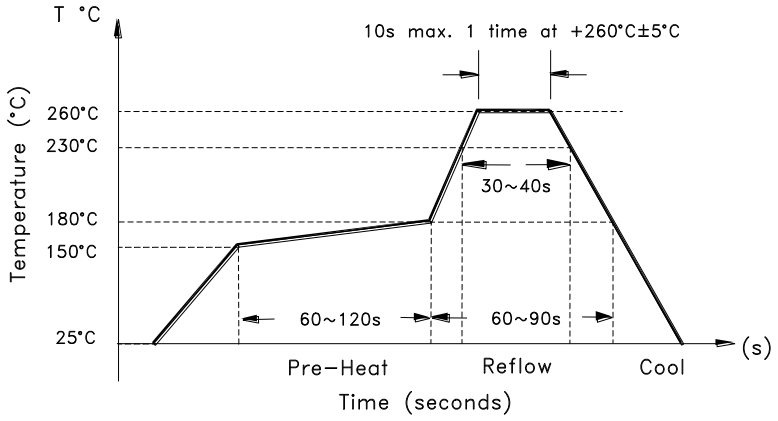

TAPE & REEL:

T: 1000pcs/reel
T5: 500pcs/reel

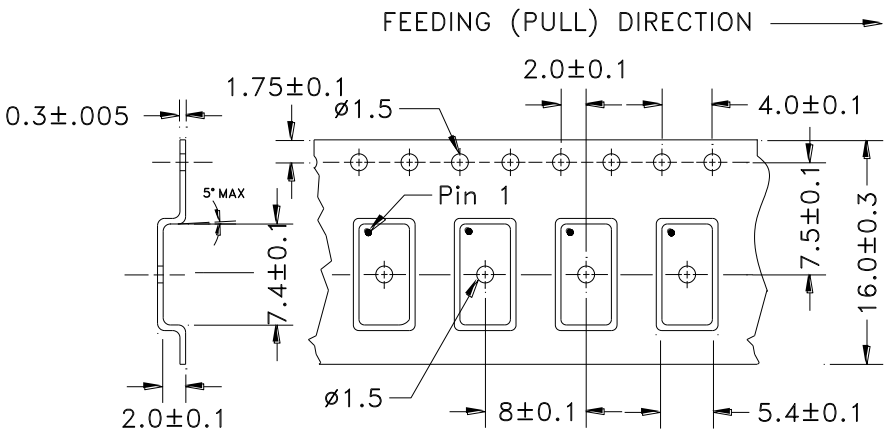

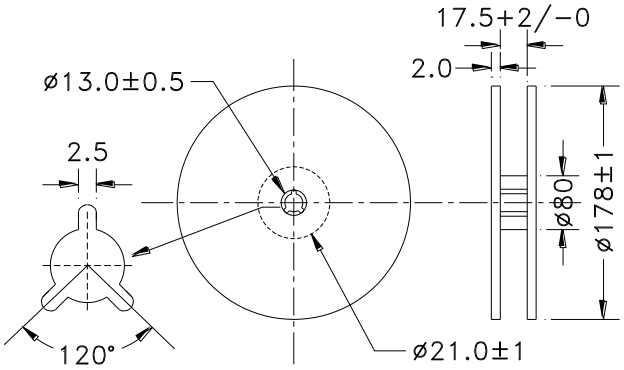

Dimension: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000| fax 949-546-8001| www.abracon.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ABRACON:

ACHL-25.000MHZ-EK ASPIAIG-Q5030-1R0M-T ASV-125.000MHZ-EC-T ABLS-16.000MHZ-D4-T ABLSG-24.000MHz-D-2-Y-T AMDLA4010S-2R2MT AMPLA5030Q-4R7MT AMPMGFB-25.0000T ASCO-50.000MHz-E-K-T3 ABM8-27.000MHZ-B2-T ABM8G-16.000MHz-4-Y-T3 ACML-0402HC-301-T AISC-1008F-100G-T AMPMAFB-27.0000T ASDMB-8.000MHZ-LC-T ASEMB-100.000MHZ-LY-T ASPI-F1010-4R7M-T ASPI-M3015-2R2M-T ASPIAIG-Q1060-1R0M-T ABM11W-16.0000MHZ-8-K1Z-T3 ABM8-24.000MHZ-D4Y-T ABM8AIG-24.000MHZ-12-2Z-T3 ATCA-07-101M-H ATX-11-F-27.000MHZ-F05-T FC5BAEEMM8.0-T1 ABMM2-10.000MHZ-E2-T ASE3-25.000MHz-E-K-T ABM8G-24.000MHz-4-Y-T3 FT5HNBPK25.0-T1 ASPIAIG-F1040-R36M-T