
KXW SERIES

105℃ 2000 hours, Miniaturized

RoHS compliance

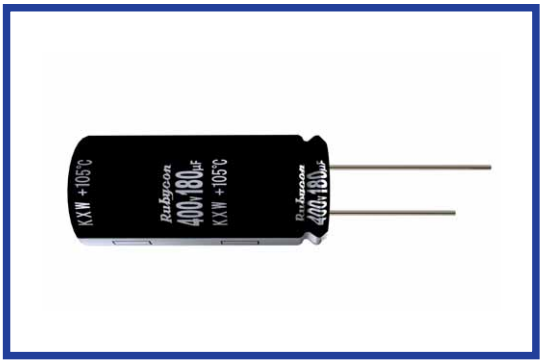

◆SPECIFICATIONS

Items	Characteristics
Category Temperature Range	−25～+105℃
Rated Voltage Range	200～450Vdc
Capacitance Tolerance	±20%(20℃,120Hz)
Leakage Current(MAX)	I=3$\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)
Dissipation Factor(MAX) (tanδ)	(20℃,120Hz)
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 105℃, the capacitors shall meet the following requirements.
Low Temperature Stability Impedance Ratio(MAX)	(120Hz)

Dissipation Factor(MAX) (tanδ)

Rated Voltage (Vdc)	200	400	420～450
tanδ	0.12	0.15	0.20

Endurance

Capacitance Change	Within ±20% of the initial value.
Dissipation Factor	Not more than 200% of the specified value.
Leakage Current	Not more than the specified value.

Low Temperature Stability Impedance Ratio(MAX)

Rated Voltage (Vdc)	200	400～450
Z(−25℃)/Z(20℃)	3	8

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency(Hz)		60(50)	120	500	1k	10k≦
Coefficient	200Vdc	0.80	1.00	1.20	1.30	1.40
	400～450Vdc	0.80	1.00	1.25	1.40	1.50

◆OPTION

	Code
PET Sleeve	EFC


◆PART NUMBER

□□□ KXW □□□□□ M □□□ □□ D×L

Rated Voltage / Series / Capacitance / Capacitance Tolerance / Option / Lead Forming / Case Size

◆DIMENSIONS

(mm)

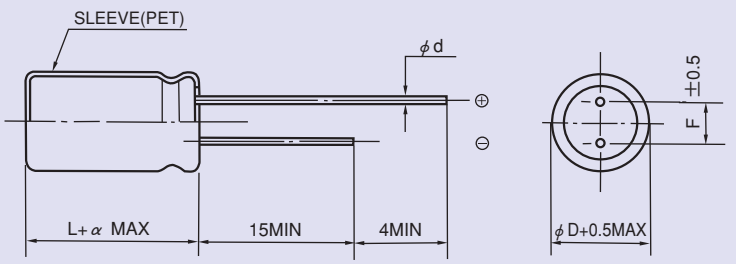

φD	10	12.5	14.5	16	18
φd	0.6		0.8		
F	5.0		7.5		
α	2.0				

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s./105℃,120Hz)
200	82	10×30	0.40
	100	10×35	0.46
	120	10×40	0.53
	150	12.5×30	0.62
	180	12.5×35	0.70
	220	12.5×40	0.80
	220	14.5×30	0.80
	270	14.5×35	0.87
	270	16×30	0.87
	330	16×35	1.01
	330	18×30	1.01
	390	16×40	1.13
	390	18×35	1.13
	470	18×40	1.27
	560	18×45	1.39
400	27	10×30	0.24
	33	10×35	0.28
	39	10×40	0.32
	47	12.5×30	0.37
	56	12.5×35	0.42
	68	12.5×40	0.48
	68	14.5×30	0.48
	82	14.5×35	0.52
	100	14.5×40	0.58
	100	16×30	0.58
	120	16×35	0.67
	120	18×30	0.67
	150	16×40	0.77
	150	18×35	0.77
	180	18×40	0.88
	220	18×45	1.00

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s./105℃,120Hz)
420	22	10×30	0.20
	27	10×35	0.23
	33	10×40	0.27
	39	12.5×30	0.31
	47	12.5×35	0.36
	56	12.5×40	0.43
	56	14.5×30	0.43
	68	14.5×35	0.51
	68	16×30	0.51
	82	14.5×40	0.57
	82	16×35	0.57
	100	16×40	0.61
	100	18×30	0.61
	120	18×35	0.66
	150	18×40	0.71
450	18	10×30	0.18
	22	10×35	0.21
	27	10×40	0.25
	33	12.5×30	0.28
	39	12.5×35	0.32
	47	12.5×40	0.38
	47	14.5×30	0.38
	56	14.5×35	0.44
	56	16×30	0.44
	68	14.5×40	0.49
	68	16×35	0.49
	82	16×40	0.55
	82	18×30	0.55
	100	18×35	0.65
	120	18×40	0.74
	150	18×45	0.80

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Rubycon:

35ZLG150MEFC8X11.5 25YXM100MEFC6.3X11 420BXW68MEFR12.5X45 400BXC4R7MEFC10X16 420BXW100MEFR14.5X45 450BXW47MEFR16X25 50TZV220M10X10.5 450BXW120MEFR18X40 50ZLJ470M12.5X20 6.3ZL1000MEFC10X12.5 6.3ZLH820M8X11.5 10ZLJ560M8X11.5 25TZV470M10X10.5 35PK1000MEFC10X20 420BXW33MEFR12.5X25 100YXF3.3M5X11 16TZV470M8X10.5 16YXF220M8X11.5 25PX680MEFC10X12.5 420BXW56MEFR12.5X35 50ZLJ220M10X16 63ZLH390MEFCG412.5X20 50YXJ220M10X16 16YXF4700M16X31.5 25ZLJ390M8X16 35YXF2200M16X31.5 35YXF2200MEFCGC16X31.5 100ZLH220MEFC12.5X25 35ZLK330M10X16 63ZLJ390M12.5X20