Features

- Transient protection for high-speed data lines
  - IEC 61000-4-2 (ESD) ±30kV (Air)
    ±30kV (Contact)
  - IEC 61000-4-4 (EFT) 40A (5/50 ns)
  - IEC 61000-4-5 (Surge) 25A (8/20μs)
- Package optimized for high-speed lines
- Provides protection for one line pair
- Low capacitance: 1.5pF @ 0V (Typical)
- Low leakage current: 0.01uA @ V_{RWM} (Typical)
- Low operating and clamping voltage
- Each I/O pin can withstand over 1000 ESD strikes for ±8kV contact discharge

Description

TS0321VBX is a low-capacitance Transient Voltage Suppressor (TVS) array designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 1.5pF only, TS0321VBX is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 (±15kV air, ±8kV contact discharge), IEC 61000-4-4 (electrical fast transient - EFT) (40A, 5/50 ns), IEC 61000-4-5 (Surge) (25 A, 8/20μs), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

TS0321VBX is in a DFN1006-2L package. Each TS0321VB device can protect one high-speed line pair. The "flow-thru" design minimizes trace inductance and reduces voltage overshoot associated with ESD events. The combined features of low capacitance and high ESD robustness make TS0321VBX ideal for portable applications such as cellular phones and MP3 players. The low clamping voltage of the TS0321VBX guarantees a minimum stress on the protected IC.

Applications

- Portable instruments
- Desktops, Servers and Notebooks
- Cellular Phones
- MP3 Players
- Keypads, Side Keys


Mechanical Characteristics

- DFN1006-2L package
- Flammability Rating: UL 94V-0
- Marking: Part number
- Packaging: Tape and Reel

Circuit Diagram



Pin Configuration

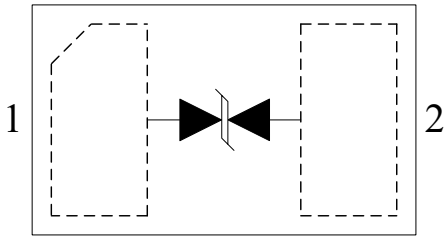


DFN1006-2L
(Top View)

Absolute Maximum Rating

Symbol	Parameter	Value	Units
I_{PP}	Peak Pulse Current (8/20μs)	25	A
P_{PK}	Peak Pulse Power (8/20μs)	150	W
V_{ESD}	ESD per IEC61000-4-2 (Air) ESD per IEC61000-4-2 (Contact)	±30 ±30	kV
T_{OPT}	Operating Temperature	-55/+125	°C
T_{STG}	Storage Temperature	-55/+150	°C


Electrical Characteristics (T = 25°C)

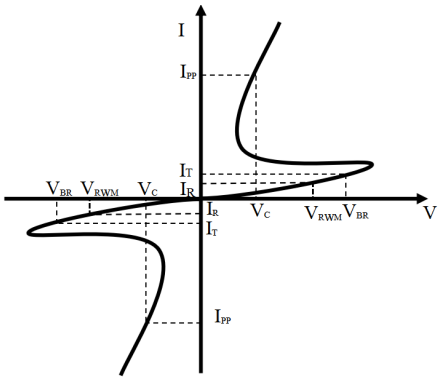Symbol	Parameter	Diagram
V_{RWM}	Nominal Reverse Working Voltage	
I_R	Reverse Leakage Current @ V_{RWM}	
V_{BR}	Reverse Breakdown Voltage @ I_T	
I_T	Test Current for Reverse Breakdown	
V_C	Clamping Voltage @ I_{PP}	
I_{PP}	Maximum Peak Pulse Current	
C_{ESD}	Parasitic Capacitance	
R_{dyn}	Dynamic Resistance	


Symbol	Test Condition	Minimum	Typical	Maximum	Units
V_{RWM}				3.3	V
I_R	V_{RWM} = 3.3V, T = 25°C		0.01	0.1	uA
V_{BR}	I_T = 1mA	6.0	7.0		V
V_C	I_{PP} = 25A, t_p = 8/20μs		7.0	9.0	V
V_C	I_{PP} = 8.0A, t_p=100ns(1)		4.2		V
	I_{PP} = 16.0A, t_p=100ns(1)		5.3		V
R_{dyn}	I_{PP} = 12.0A, t_p = 100ns(1)		0.14		Ω
C_{ESD}	V_R = 0V, f = 1MHz		1.5		pF

Notes:(1)Measurements performed using a 100ns Transmission Line Pulse(TLP) system.


TLP Measurement

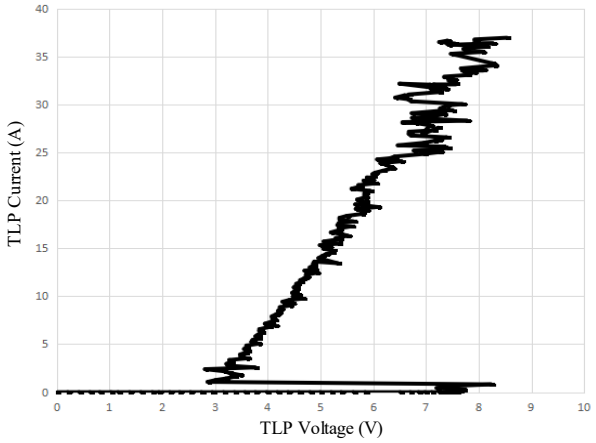


Clamping Voltage V_C vs. Current I_{PP}

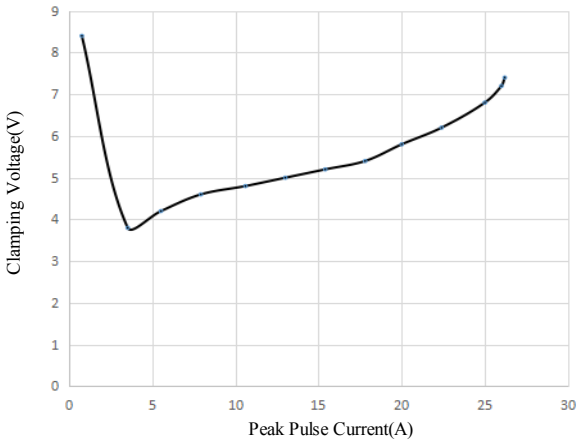


Insertion Loss S21

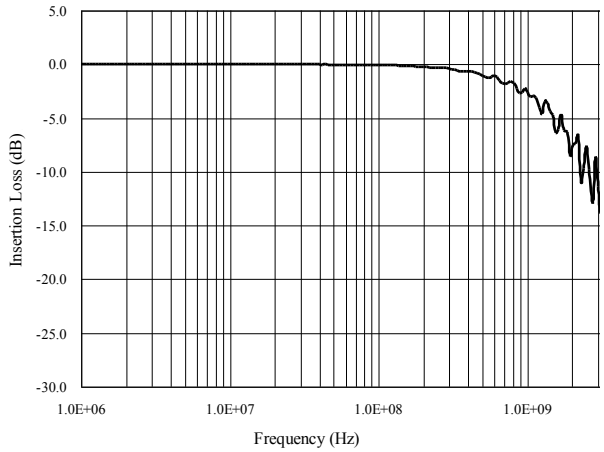


Normalized Capacitance vs. Voltage

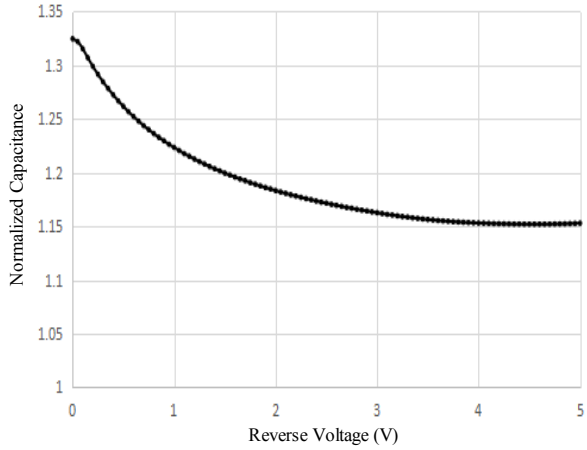

ESD Clamping of I/O to GND (+8kV Contact per IEC 61000-4-2)

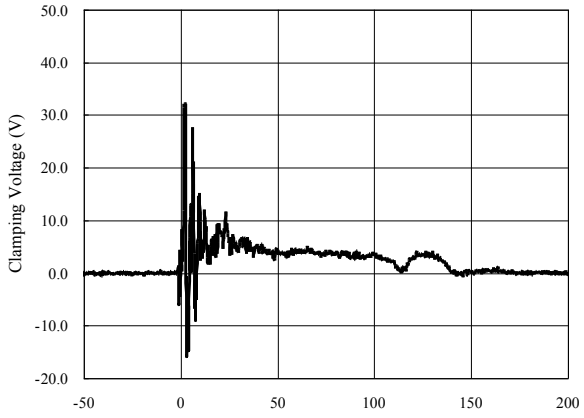



ESD Clamping of I/O to GND (-8kV Contact per IEC 61000-4-2)

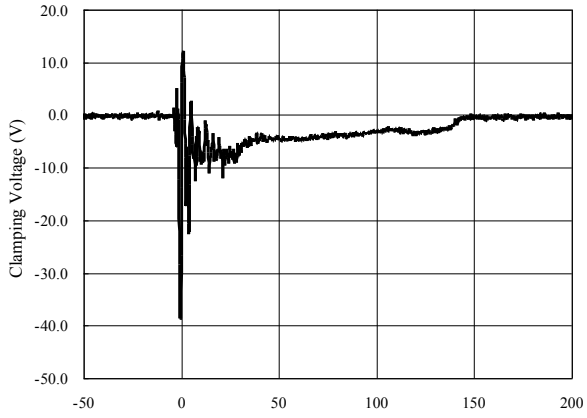

Package Outline

- DFN1006-2L package
- 2 leads, very small package
- MSL-1

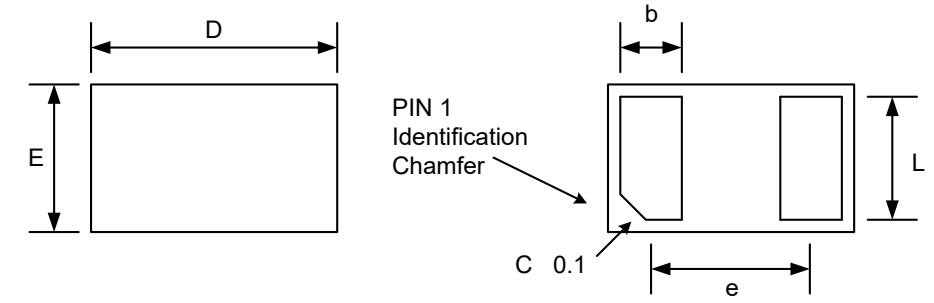


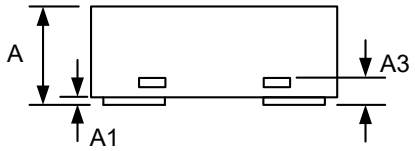


Package Dimensions (Controlling dimensions are in millimeters)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Minimum	Maximum	Minimum	Maximum
A	0.400	0.550	0.016	0.022
A1	0.000	0.050	0.000	0.002
A3	0.125 REF		0.005 REF	
D	0.950	1.050	0.037	0.041
E	0.550	0.650	0.022	0.026
b	0.200	0.300	0.008	0.012
e	0.650 BSC		0.026 BSC	
L	0.450	0.550	0.018	0.022

Tape and Reel Specification

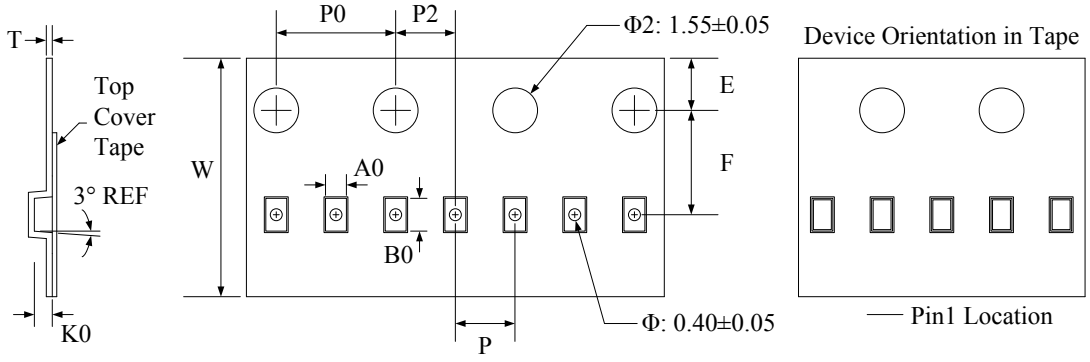

Symbol	W	A0	B0	K0	E	F	P	P0	P2	T
Dimensions (mm)	8.00±0.1	0.7±0.05	1.15±0.05	0.55±0.05	1.75±0.1	3.5±0.05	2.0±0.1	4.0±0.1	2.0±0.05	0.2±0.05

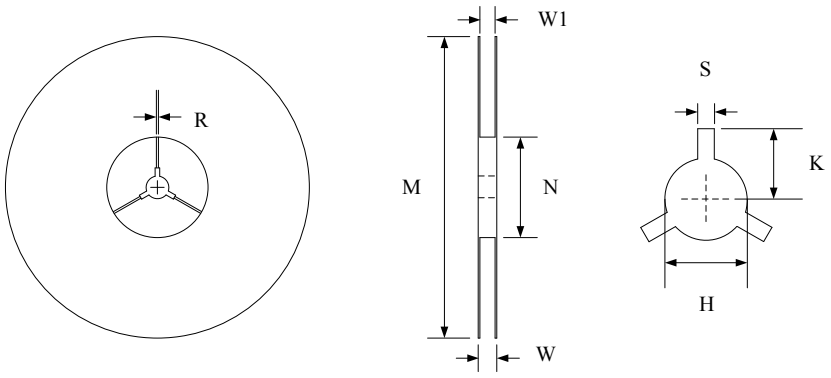


Symbol	Reel Size	M	N	W	W1	H	S	K	R
Dimensions (mm)	Φ178	178.0±1.0	60.0±1.0	11.5±0.5	9.0±0.5	13.0±0.5	2.0±0.1	11.0±0.2	1.0±0.05

Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
TS0321VBX	3.3V	10,000	7 Inch

Marking Codes

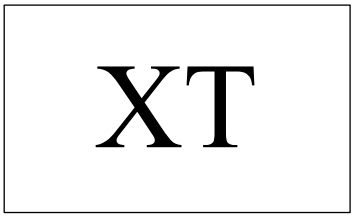

Note:

(1) "T" is part number.

(2) "X" is the internal code, is changeable(A-E,0-9).

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

JY:

P0300SCX TP6063F-TDX TT0201SAX TT0301MAX TT0514TLX TT1501SBX TS1811LD-CX TS2411LEX JY1106-ADJBX JY2126AX RCLAMP0524P TS0421LEX TT0314TPX JY1106-180EX JY1117E50AX MMBT3906X TL431 TNM01K20FX JY1103-H330QX JY1103-H390BX P3100SCX TT0511TEX SMCJ20AX B5819WX JY2312X JY9425X TS0334PLX TS0512PMX TS0321LEX TT0401TBX