Materials
1. C3604 brass, nickel plated
2. C3604 brass, nickel plated
3. C3604 brass, nickel plated
4. C3604 brass, nickel plated
5. POM, black

Electrical requirements
Dielectric strength: 1 min @ 500 Vac and 2mA
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 50 mΩ or less


Mechanical requirements
Durability: 5000 mating cycles while maintaining normal operation and < 50mΩ
Bending strength: ≥ 3.2 kg
Breaking strength: ≥ 6.8 kg


Environmental tests
Salt spray test: 5% NaCl spray at 1ml/80cm²/h, chamber temp 46.5°C, spray temp 35°C, 87% humidity, 48 hours. No oxidation.


Cold resistance: -25°C±3 for 2 hours with no degradation.
Heat resistance: 85°C±3 for 2 hours with no degradation.


Operating range
-30 to 85 °C



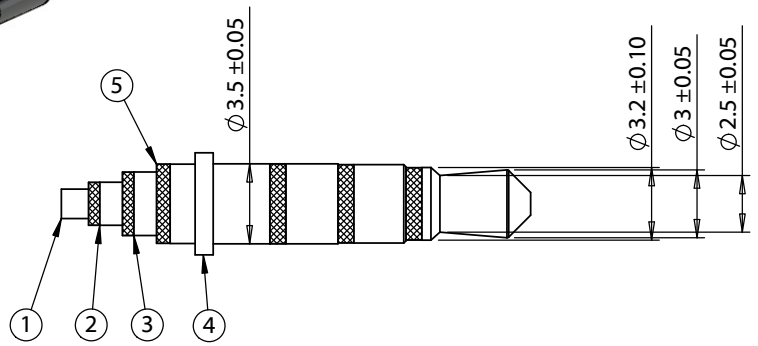



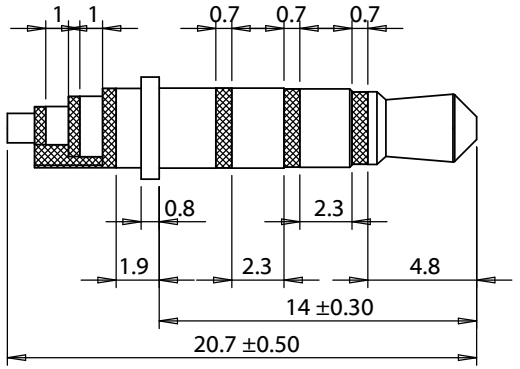



REVISION	DATE	DESCRIPTION
A	3/6/14	Initial release

PREPARED:
JM
2014.03.06 11:16:14 -08'00'

VERIFIED:
LA
Digitally signed by LA
DN: cn=LA, o=Tensility, ou, email=QA0001@tensility.com, c=US
Date: 2014.03.06 12:03:39 -08'00'

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

NOTES
RoHS and REACH compliant

Function test: no open, no short circuit, no INT

DESCRIPTION:
Connector, 4C audio plug, 3.5xL20.7 mm, brass, nickel plated, molding style

TENSILITY
20802 Sockeye Place #130
Bend, OR 97701 USA
tel **541.323.3228** ***fax*** **541.323.4202**
800 **877.670.7118** **www.tensility.com**

SIZE	PART NUMBER
A	**50-00397**

SCALE: 5:1	WEIGHT:	SHEET 1 OF 1

5 4 3 2 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Tensility International:

CA-2208 30-01739 10-02224 30-00949 30-01727 30-01943 10-02329 10-02381 30-01788 30-03111
053-0382R 10-02380 10-02399 30-01460 30-01520 30-01734 10-01096 10-01936 30-00656 30-00873
30-01776 30-01969 10-02959 30-01029 30-01031 30-01568 30-01570 30-01991 30-01657 30-02978