



MAPX	MODIFICATION	DATE

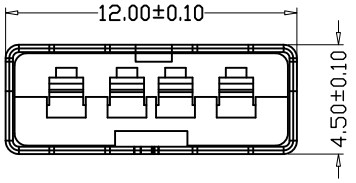

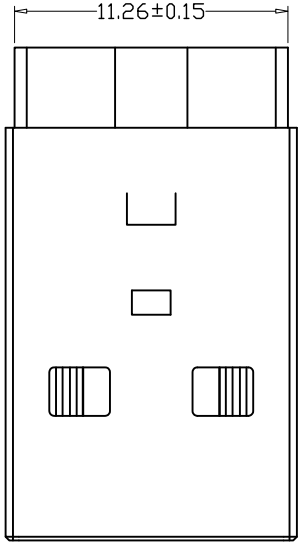

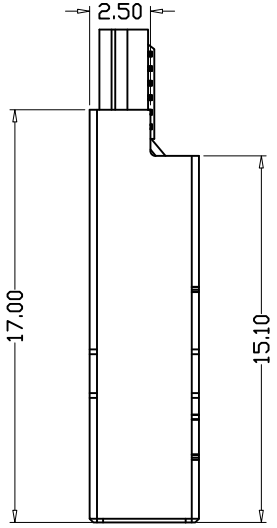

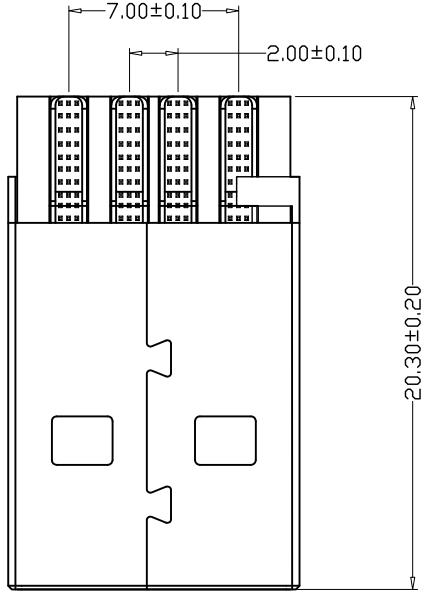

NOTES:
Housing: Thermoplastics
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:−55° C to +85° C
Insulator color: Black/White
Plastic material:PBT/LCP
Shell finish:Nickel plated/Tin−Lead plate
Contact finish:
- 01:Selective Gold Flash
- 02:Selective Gold 3U"
- 03:Selective Gold 5U"
- 04:Selective Gold 15U"
- 05:Selective Gold 30U"

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE			
X	±0.25	X	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	917-161B101AAX0220
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AM E款一体式双卡点右边短路 铁壳反向PBT白胶E款端子17MM 得康
日期 DATE	2015.01.14	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-752B1114D10200 907-312A1101Y10210 912-112A1011D10100 920-A62A2021S10108
907-111A1022D10200 919-162A1012D10400 920-C52A2021S10105 920-C62A2021S10103
920-F52A2021S10105 920-154A2021Y10110 904-331B2032S10200 906-262A1021D10200
916-151A1022Y10200 917-B88C201AH70201 908-351A1011D10100 912-112A2021S10100
912-312A1012D10100 918-318K2023C40005 918-418K2022Y40011 918-468K2029Y50000
920-A62A2021S10104 910-151A2021D10100 917-P81A202ES60201 918-415K3028S40000
904-232A2031S10100 905-761A2032S10200 920-A64A2091S101A3 904-232B2032S10100
906-552A1012D10200 911-221A2021S10100