
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00001	Connector, dc plug, 3.5x1.1xL20 mm, molding style, spring contacts	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00002	Overmold, PVC	1	black

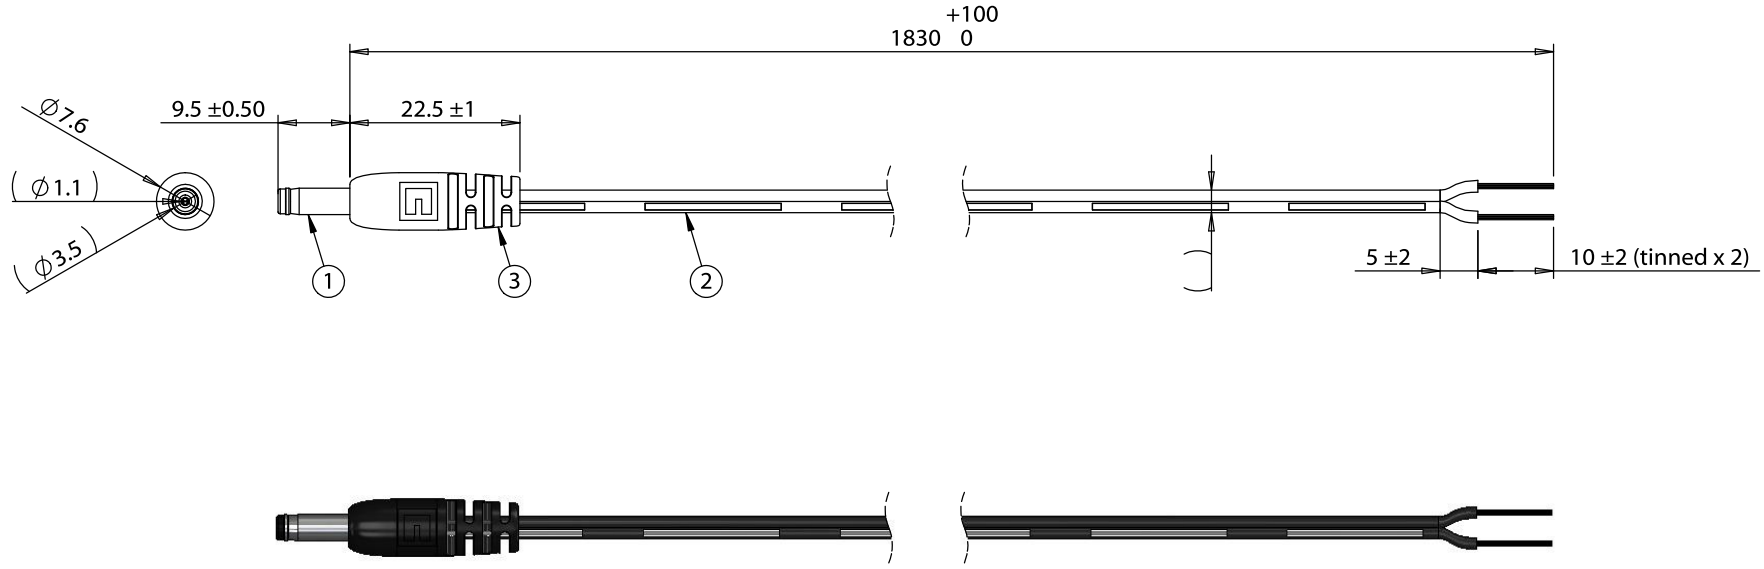

Wiring Diagram	
50-00001	wire color
center	black with stripe
sleeve	black

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:
A	10/3/2017	Initial release

Prepared: AG Digitally signed by AG Date: 2017.10.05 14:04:22 -07'00'

Verified: GL Digitally signed by GL Date: 2017.10.05 14:10:29 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 3.5x1.1x9.5 mm 50-00001 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-02489

Scale: 1:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Tensility International:

10-02329 10-02399 30-00949 30-01776 30-01991 10-02380 30-02978 CA-2208 053-0382R 10-02381
30-01031 30-01727 30-01739 30-01969 10-02224 30-00873 30-01788 30-00656 10-02959 30-01029
30-01657 30-01943 30-01520 30-01568 30-01734 10-01096 10-01936 30-01460 30-01570 30-03111