Surge protection device - DT-TELE-RJ45 - 2882925

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Attachment plug with surge protection for analog and digital telecommunications interfaces (VDSL up to 50 Mbps). Connection: RJ45 (RJ12/RJ11) and screw terminal block (COMBICON). Alternatively, can be snapped onto a DIN rail.

Your advantages

- For analog and digital (DSL) telecommunications interface
- Connection: RJ45 socket and/or plug-in screw terminal blocks
- The adapter included enables conversion from RJ45 to RJ11 and RJ12
- DIN rail mounting possible by removing the cover cap
- International use thanks to multiple assignment

Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 155137
GTIN	4046356155137
Weight per Piece (excluding packing)	332.600 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Height	102 mm
Width	25 mm
Depth	63.5 mm

Ambient conditions

Downloaded from Arrow.com.

Surge protection device - DT-TELE-RJ45 - 2882925

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	Zinc die-cast
Color	silver/black
Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
Type	Attachment plug for DIN rail mounting
Number of positions	4
Direction of action	Line-Line & Line-Ground/Shield

Protective circuit

IEC test classification	B2
	C1
	C2
	C3
	D1
Maximum continuous voltage U_C	185 V DC
	130 V AC
Rated current	≤ 380 mA (25 °C)
Operating effective current I_C at U_C	≤ 6 µA
Residual current I_{PE}	≤ 4 µA
Nominal discharge current I_n (8/20) µs (line-line)	≤ 5 kA
Nominal discharge current I_n (8/20) µs (line-earth)	≤ 5 kA
Total discharge current I_{total} (8/20) µs	10 kA
Nominal pulse current Ian (10/1000) µs (line-line)	100 A
Nominal pulse current Ian (10/1000) µs (line-earth)	100 A
Nominal pulse current Ian (10/700) µs (line-line)	150 A
Nominal pulse current Ian (10/700) µs (line-earth)	150 A
Output voltage limitation at 1 kV/µs (line-line) static	≤ 250 V
Output voltage limitation at 1 kV/µs (line-earth) static	≤ 250 V
Residual voltage at I_n (line-line)	≤ 120 V
Residual voltage at I_n (line-earth)	≤ 120 V
Voltage protection level U_p (line-line)	≤ 250 V (B2 - 4 kV / 100 A)
	≤ 250 V (C1 - 1 kV/500 A)
	≤ 250 V (C2 - 10 kV / 5 kA)
Voltage protection level U_p (line-earth)	≤ 250 V (B2 - 4 kV / 100 A)

Downloaded from Arrow.com.

Surge protection device - DT-TELE-RJ45 - 2882925

Technical data

Protective circuit

	≤ 250 V (C1 - 1 kV/500 A)
	≤ 250 V (C2 - 10 kV / 5 kA)
Response time t_A (line-line)	≤ 100 ns
Response time t_A (line-earth)	≤ 100 ns
Input attenuation aE, sym.	typ. 0.5 dB (≤ 5 MHz / 100 Ω)
	typ. 0.3 dB (≤ 8 MHz / 150 Ω)
	typ. 0.3 dB (≤ 2.5 MHz / 600 Ω)
Cut-off frequency fg (3 dB), sym. in 100 Ohm system	typ. 50 MHz
Capacity (line-line)	typ. 20 pF (f= 1 MHz / VR= 0 V)
Capacity (line-earth)	typ. 20 pF (f= 1 MHz / VR= 0 V)
Resistance in series	3.3 Ω 10 %
Surge protection fault message	none
Impulse durability (line-line)	B2 - 4 kV/100 A
	C1 - 1 kV/500 A
	C2 - 10 kV/5 kA
Impulse durability (line-earth)	B2 - 4 kV/100 A
	C1 - 1 kV/500 A
	C2 - 10 kV/5 kA
	D1 - 1 kA

Connection data

Connection method	RJ45/COMBICON
Connection method IN	RJ45 socket
	MC 1,5/4
Connection method OUT	RJ45 socket
	MC 1,5/4
Connection technology	Screw connection
Screw thread	M2
Tightening torque	0.22 Nm
Stripping length	7 mm
Conductor cross section flexible	0.14 mm² ... 1.5 mm²
Conductor cross section solid	0.14 mm² ... 1.5 mm²
Conductor cross section AWG	28 ... 16

Connection, equipotential bonding

Connection method	DIN rail NS35

Standards and Regulations

Standards/specifications	IEC 61643-21 2012

Downloaded from Arrow.com.

Surge protection device - DT-TELE-RJ45 - 2882925

Technical data

Standards and Regulations


	EN 61643-21 2013

Environmental Product Compliance


REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”

Drawings

Circuit diagram

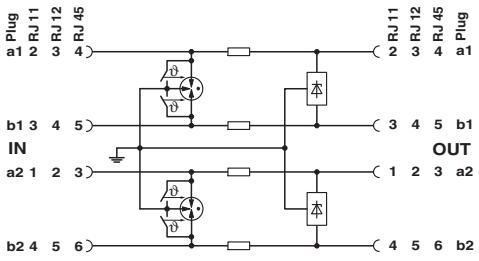

Dimensional drawing

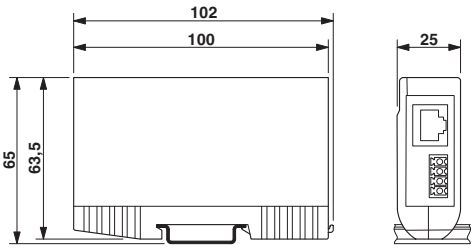

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130800
eCl@ss 6.0	27130800
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

Downloaded from Arrow.com.

Surge protection device - DT-TELE-RJ45 - 2882925

Classifications

ETIM

ETIM 6.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approval details

EAC	EAC	RU C-DE.A*30.B01561
EAC	EAC	EAC-Zulassung

Phoenix Contact 2018 © - all rights reserved
http://www.phoenixcontact.com

Downloaded from Arrow.com.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PHOENIX CONTACT:

1052345:0021 1604561 1817440 2800865 5435970 0828799 1674794 3244449 3248125 0818153
1407671 0808671:0311 1899414 2905346 3036424 0817028 1539570 1619453 1712737 0801422
1442188 1778599 2838254 3241240 0800379 1956137 2800976 0801820 0818111 3210202