

Dimensions: [mm]

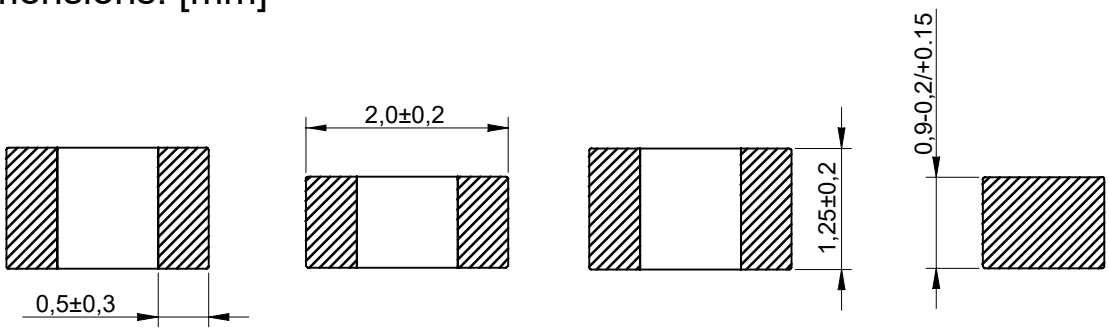

Recommended Land Pattern: [mm]

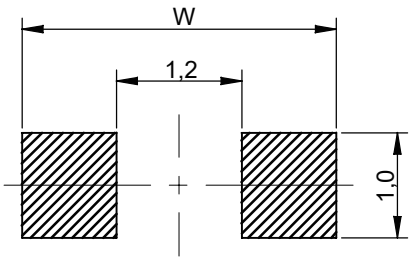

WIDE BAND / HIGH SPEED: W = 3,0
HIGH CURRENT: W = 4,0

Electrical Properties:

Properties	Z (Ω)	I_R (mA)	R_{DC} (Ω)
Value	2200	200	0.6
Tolerance	±25%	max.	max.
Test Condition	100MHz/500mV	△T=40°C	

General Information:


Test conditions of Electrical Properties: 20±15°C, 30~70%RH
Operating Temperature: -55°C to +125°C
Storage Temperature: -40°C to +85°C

				UNIT: MM	KOHERelec KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 1/2	
				APPROVAL: WSD	
				SIZE:	DESCRIPTION: SMD EMI Suppression Ferrite Bead
A	15-OCT-18	PDF	ZXG	PACKING UNIT: 4000 pcs	PART NO: FBSHS0805-222-201R
REV	DATE	FILE	BY		

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

Typical Electrical Characteristics:

Impedance VS. Frequency Characteristics:

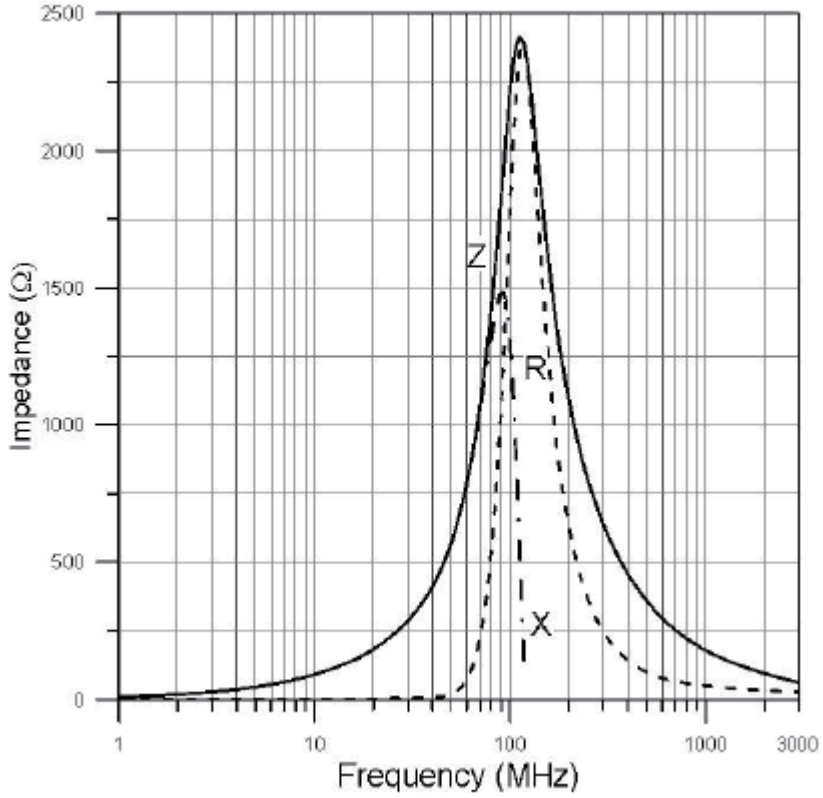

				UNIT: MM	KOHERelec KOHER (Shanghai) Electronic Co.,Ltd
				SCALE:	
				SHEET: 2/2	
				APPROVAL: WSD	
				SIZE:	DESCRIPTION: SMD EMI Suppression Ferrite Bead
A	15-OCT-18	PDF	ZXG	PACKING UNIT: 4000 pcs	PART NO: FBSHS0805-222-201R
REV	DATE	FILE	BY		

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

KOHERelec:

MDA1870-4R7M MDA7030-2R2M MDA1350-330M MDA7050-220M MDA4020-1R0M MDA5030-100M THC2815-4R7M MDA1040-1R0M MDA1054HT-150M NRSE5020-4R7M MDE0420-2R2M MDE0650-100M MDE1040-680M NRSE5040-6R8M MDA7050-2R2M MDE0320-100M MDA1040-220M MDA1050-3R3M MDA1054HT-680M MDA1870-100M MDA7050-6R8M MDE0630-330M MDA1050-470M NRSC3015-1R5N NRSE8065-103M THC2815-3R3M MDA1870-1R0M MDA1870-6R8M NRSE5040-220M THC2815-2R2M