
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17


1 Electrical


1.1 Impedence	50Ω
1.2 Frequency	DC~11GHz
1.3 Dielectric withstanding voltage	1500V(volts RMS)
1.4 Center contact resistance	≤ 1.5MΩ
1.5 Outer contact resistance	≤ 0.2MΩ
1.6 Insulation resistance:	≥5000MΩ

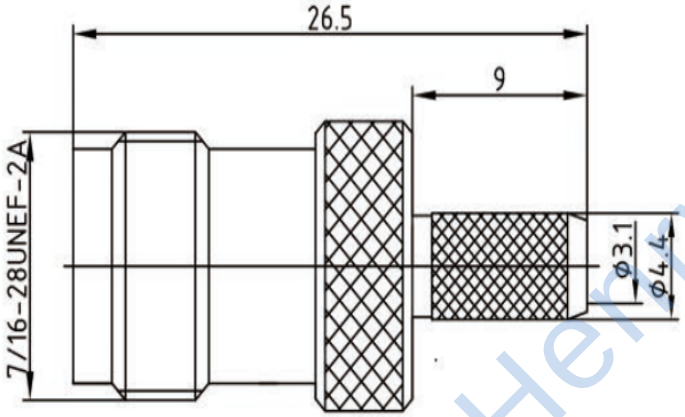

2 Environmental&Mechanical

2.1 Temperature range	-40℃~+70℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

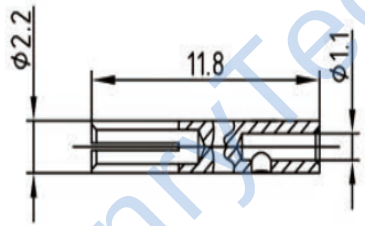



3 Materials&plating

3.1 Body:	Brass; Nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Phosphor Bronze, Gold plated
3.4 Ferrule:	Copper, Nickel plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: HL-TNC-K5Y TNC Female Conn. for RG58 Cable Crimp				
ENGINEER: L. yu 19/03/17					
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		HenryTech			
		DIMENSION IN MILLIMETERS (mm)			
	PART NO: HL-TNC-K5Y	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

H3-MABA-011085 HN-DC2016-0.5(12-4.6)M HT-HFCN-2700+ HX-N-JK HX-1.85-JJ HL-SMA-KHD4 HL-SMAMF-2-18-15dB HL-SMB-K3DY HX-SMA/SMP-JK H3-MABA-007871-CT1A40 HL-MCX-KE-02 HL-SSMA-KHD-1 HLCC2250G HT-QCN-19+ H2SYDC-20-62HP+ H3-MABA-010551-CF1071 HL-N-KKC HN-LP7-0.5-1.27(9.4-2.8) HT-LFCG-1700+ HT-LFCN-400+ H3-MAPD-008109-C30040 HG-SCN-2-65+ HL-SMA/SMB-KK HT-BFHKI-1572+ HT-LFCG-530+ HT-LFCN-3800+ HT-SCA-4-10+ H3-TC1-1TG2+ HG-SCN-2-22+ HT-HFCN-3800+