
Rocker Switch | **RA1-1A-DC-2-B-1**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

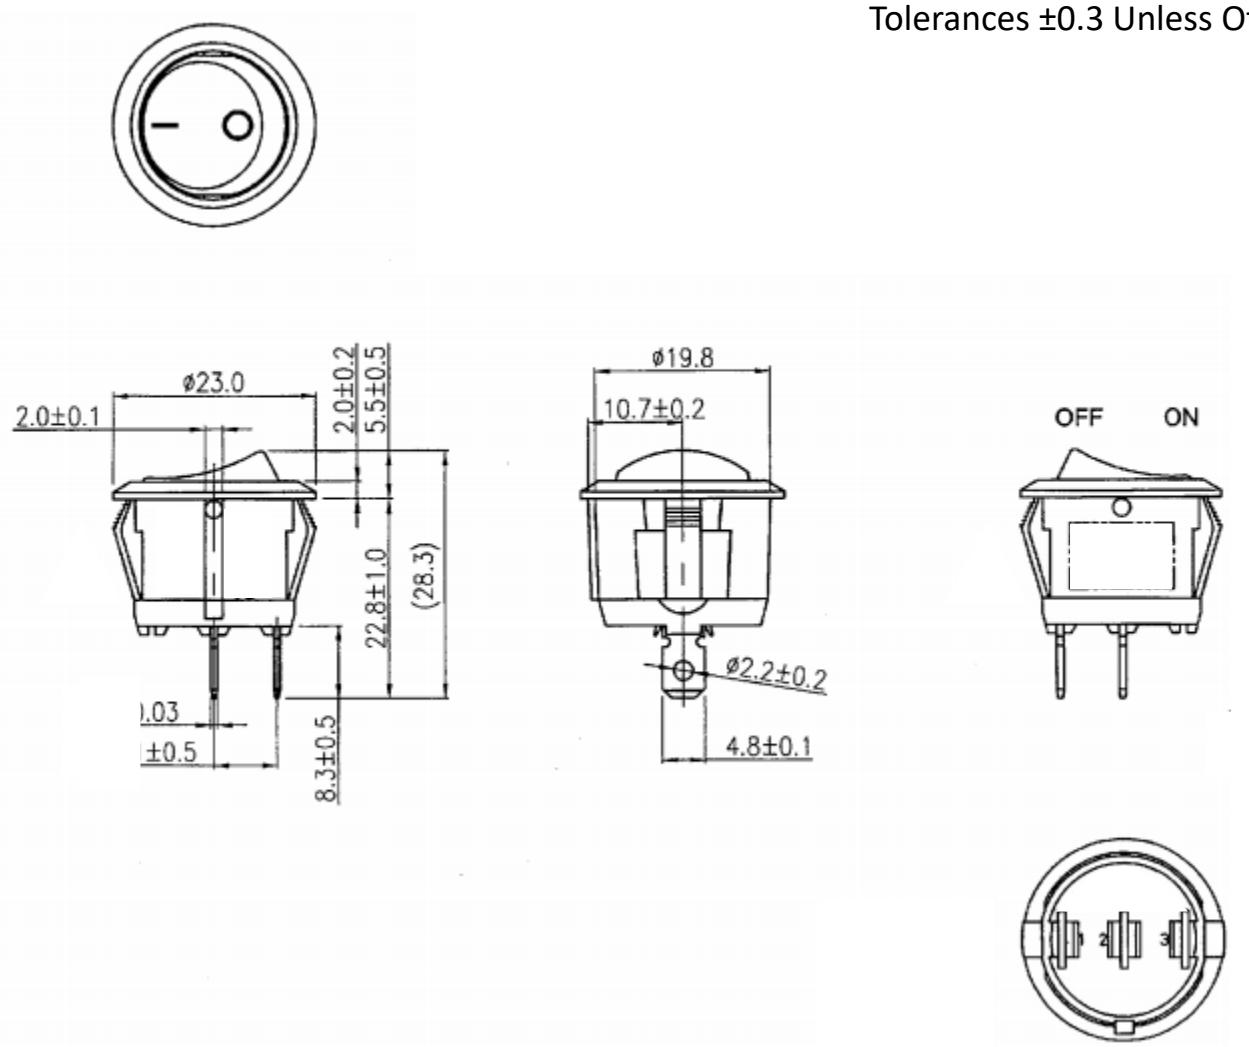

Mounting Hole

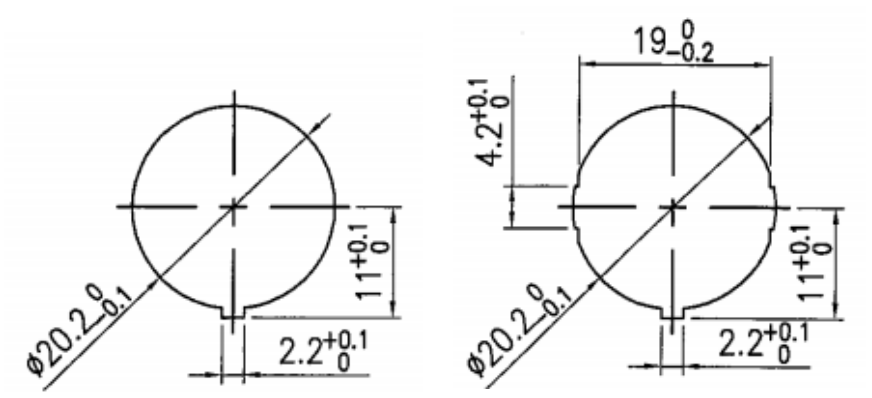


Thickness: 2.0~3.0

Thickness: 0.7~3.0

Circuit Diagram

2P SPST OFF-ON



Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94-V2)
Actuator	Black, Nylon 66 (94-V2)
Terminals	Silver plated, Copper alloy
Hot stamping	White, 0-

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RG3-1A-DC-1-B SRD1-2A-DC-1-BGN SRD2-2F-DC-1-RNN TA1-1A-DC-4 TA1-1F-DC-4 TA2-1G-DC-6-O PB-1B-DC-2-RIL SB-1B-DC-3-R SRD2-2F-DC-1-BNN PD-1E-DC-9-UL RA4-2A-DC-2-AL TC6-P1-Z TE1-1F-DC-1-PB TE6-1A-DC-1-AL SRB1-1G-DC-1-NN RC-1A-DC-1-AL SC-B TB1-2H-DC-6 TE3-1A-DC-1-AL WR1 TB2-2H-DC-1 SRC1-1B-DC-1-B PB-1A-DC-2-B PB-1A-DC-2-RDL RD2-1A-DC-1-AL RF1-1A-DC-2-B-3 TE6-1A-DC-1-UL SRD2-1G-DC-1-BNN TA2-1A-DC-5 SB-1B-DC-3-B