


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

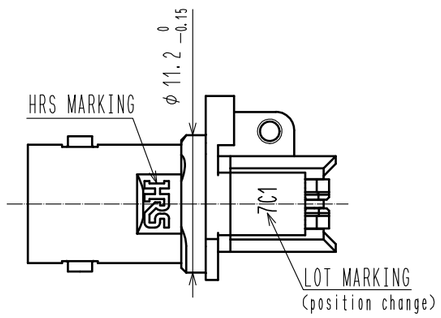



Reference:Panel Layout, View from the mating side. △3
Panel thickness 0.5~2mm
Screw M2.6×0.45





Recommended PCB Layout(t=1.6 FR4),
View from the connector mounting side. △3

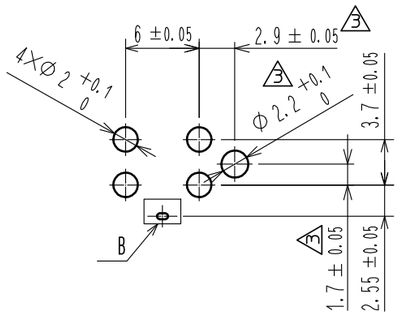




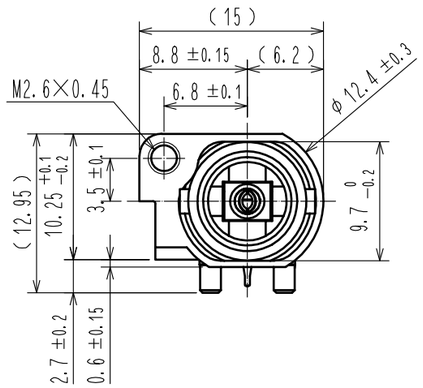

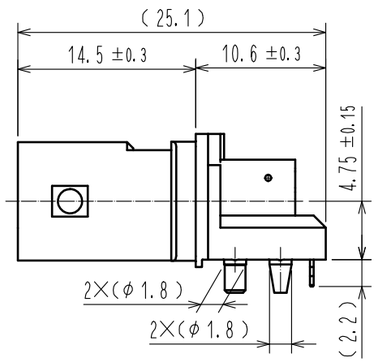




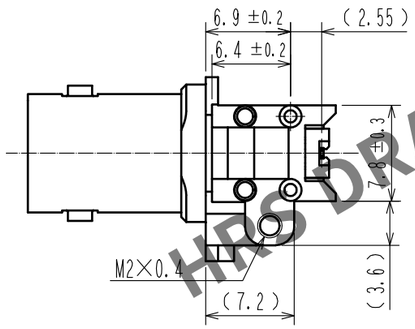


HRS DRAWING FOR REFERENCE

Packing specification (FREE)



Packing unit : max 500 pcs/box
(max 5 trays/box)



Max 100 pcs / tray

RoHS COMPLIANT

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	SPS				
1	ZINC ALLOY	NICKEL PLATING	3	BERYLLIUM COPPER	GOLD PLATING

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△3	5	DIS-D-00003929	RO. YOKOYAMA	TO. KATAYAMA	20190314

HIROSE ELECTRIC CO., LTD.

APPROVED	TO. KATAYAMA	20170901
CHECKED	TO. KATAYAMA	20170901
DESIGNED	MA. SAEKI	20170901
DRAWN	MA. SAEKI	20170901

DRAWING NO.	EDC-377923-00-00
PART NO.	BNC(75)-PLR-PC(D)-12G-3
CODE NO.	CL302-0088-0-00 △3 1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

ZE05-24DP-2H DF19A-3032SCFA(41) DF40C-50DP-0.4V(51) DF57AH-5S-1.2C DF65-4P-1.7V(21) FH41-30S-0.5SH(05) DF22A-1416SCFA GT8E-6S-HU RM15TRH-10PH(81) DF33C-4S-3.3C FH41-50S-0.5SH(28) ZE05H-4P-2V(A) BM29B0.6-4DS/2-0.35V(51) RM15TP-2PA(81) DF11-16DP-2DSA(24) DF36A-25P-SHL DF52-4P-0.8C DF62C-4S-2.2C FH35C-19S-0.3SHW(50) FH72-21S-0.3SHW FX18-60S-0.8SH ZE05H-12DP-2H DF59M-2224PCF FX18-80S-0.8SH FX8-120S-SV(22) HDE-CTH(10) RM12BRD-2PH(81) ZH05-20DP-HU(B) DF17(3.0)-40DS-0.5V(57) ZE064W-8DP-HU/R(A)