
Technical Data Sheet		Rosenberger
SMA	Straight Plug	**32S107-303L5**

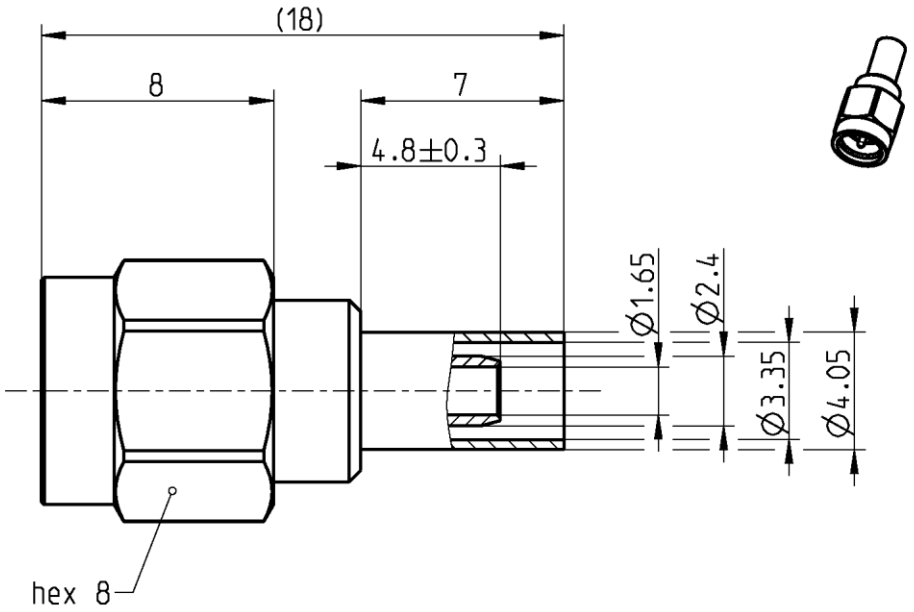

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to	IEC 60169-15, EN 122110, MIL-STD-348A, Fig. 310

Documents

Assembly instruction	32 B5

Material and plating

Connector parts	**Material**	**Plating**
Center contact	Brass	AuroDur®, gold plated
Outer contact	CuBe or equiv.	AuroDur®, gold plated
Dielectric	PTFE	
Gasket	Silicone	
Coupling nut	CuBe or equiv.	Gold, 0.1 µm
Crimping ferrule	Copper	Gold, 0.1 µm

Dieses Dokument ist urheberrechtlich geschützt ● This document is protected by copyright ● Rosenberger Hochfrequenztechnik GmbH & Co. KG

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Technical Data Sheet		Rosenberger
SMA	Straight Plug	**32S107-303L5**

Electrical data

Impedance	50 Ω
Frequency	DC to 12.4 GHz
VSWR	≤ 1.05 + 0.01 x f [GHz], DC to 5 GHz
Insertion loss	≤ 0.03 x $\sqrt{f(GHz)}$ dB, DC to 5 GHz
Insulation resistance	≥ 5 x10^3 MΩ
Center contact resistance	≤ 3 mΩ
Outer contact resistance	≤ 2 mΩ
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	min. 500
Coupling nut retention	≥ 270 N
Center contact captivation: axial	≥ 27 N
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Tooling

Crimping tool	11W150-000
Crimp insert	11W150-102

Suitable cables

TZC 502 2101, RG 316 /U-d, K 02252 D

Weight

Weight	2.87 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date
M. Schmid	06.07.07	Chr. Janßen	17.11.20

Rev.	Engineering change number	Name	Date
d00	20-1927	S. Huber-Siegl	17.11.20

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Dieses Dokument ist urheberrechtlich geschützt ● This document is protected by copyright ● Rosenberger Hochfrequenztechnik GmbH & Co. KG

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Rosenberger:

119S104-40ML5 18S203-40ML5 19K119-K11L5 19S161-40ML5 32K607-303L5 32S107-306L5
02K621-K00S3 32RS132-K00L5 71S102-109N5 51S101-S00N5 53K189-K00N1 32S102-271L5
56K501-K00N5 119K101-272N5 32K151-S00L5 51 K 507-802 N5 53K160-KIMN1 02K109-S00S3
153QK153-S00N5 19S202-40ML5 28K132-K00N5 28K201-400N5 32S151-S00L5 32Z111-000L5
53K503-K00N5 19S103-400L5 32S207-303L5 59K214-303L5 02K121-K00S3 02S119-S00E3